


DIMENSIONS



Name	FIFTY H0 RECESSED 90 3000K NT
Reference	A2910111NT
Color	Textured black
RAL	9005
Category	CEILING RECESSED

PRODUCT

FIFTY H0 RECESSED 90 3000K NT

A2910111NT

Textured black

9005

CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3225 Lm
Power	23,1 W
Power values of the system	26,86 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	140 Lm/W
Current intensity	900 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	864 × 58 mm.
Diffuser included	Yes
Weight	3550 g.
Packaged weight	4990 g.
Packaging dimensions	Ø168 × 1020 mm.
Units per package	1
Materials	Aluminium / Polycarbonate



Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces.

POLAR DIAGRAM

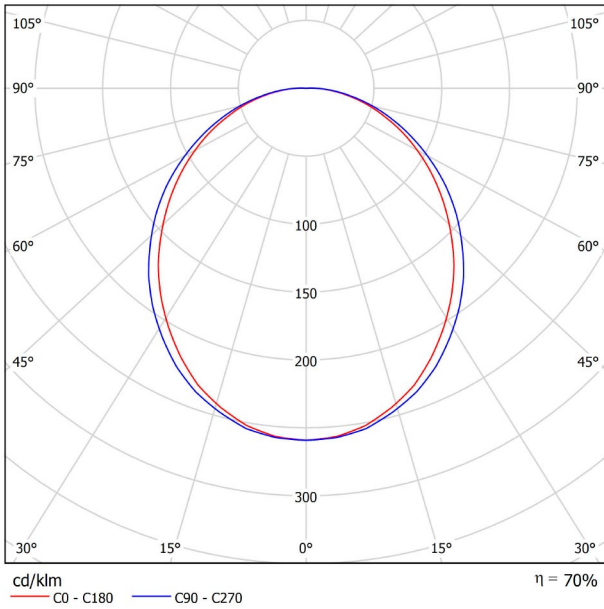

CONICAL DIAGRAM

