




DIMENSIONS



ACCESSORIES



CUSTOM ACCESSORIES  
(MANDATORY)

Name	FIFTY H0 RECESSED CUSTOM 90 3000K WT
Reference	A2911111WT
Color	Textured white
RAL	9016
Category	CUSTOM SYSTEMS

PRODUCT

FIFTY H0 RECESSED CUSTOM 90 3000K WT  
A2911111WT  
Textured white  
9016  
CUSTOM SYSTEMS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	3225 Lm
Power	23,1 W
Power values of the system	26,86 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	140 Lm/W
Current intensity	900 mA
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Recess measurements	864 × 58 mm.
Diffuser included	Yes
Weight	3550 g.
Packaged weight	4990 g.
Packaging dimensions	Ø168 × 1020 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.

POLAR DIAGRAM



CONICAL DIAGRAM

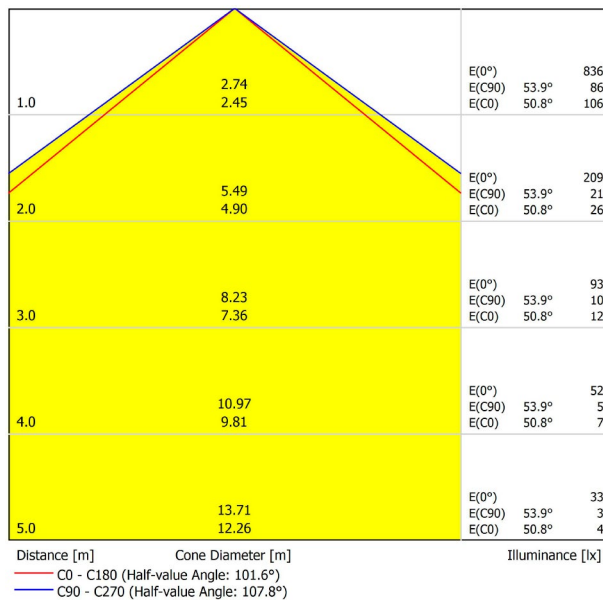

FIFTY 2 End Cap Kit Recessed	1050-00-20-   WT   NT
FIFTY Straight Joiner	1050-01-80
FIFTY Power Line	A231-00-00



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL |  AL |