



DIMENSIONS



ACCESSORIES



CUSTOM ACCESSORIES  
(MANDATORY)

Name	FIFTY H0 RECESSED CUSTOM 120 DIM DALI/PUSH 4000K NT
Reference	A2911222NT
Color	Textured black
RAL	9005
Category	CUSTOM SYSTEMS

PRODUCT

Name	FIFTY H0 RECESSED CUSTOM 120 DIM DALI/PUSH 4000K NT
Reference	A2911222NT
Color	Textured black
RAL	9005
Category	CUSTOM SYSTEMS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	4400 Lm
Power	30,8 W
Power values of the system	33,85 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	143 Lm/W
Current intensity	900 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Recess measurements	1148 x 58 mm.
Diffuser included	Yes
Weight	4730 g.
Packaged weight	6440 g.
Packaging dimensions	Ø168 x 1305 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.



POLAR DIAGRAM

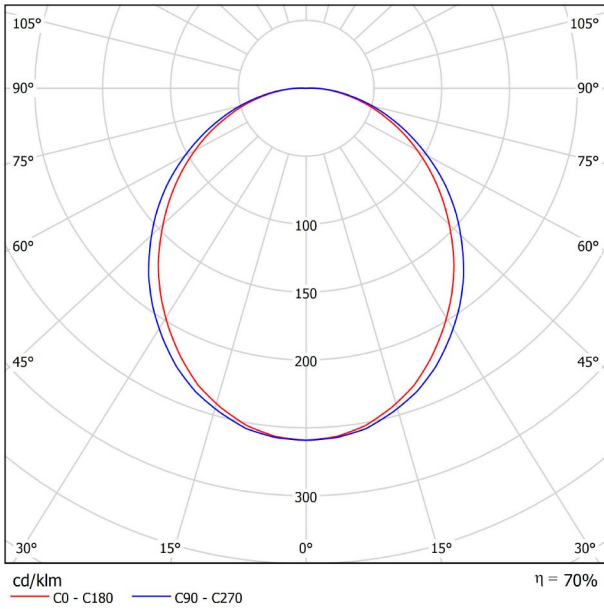

CONICAL DIAGRAM

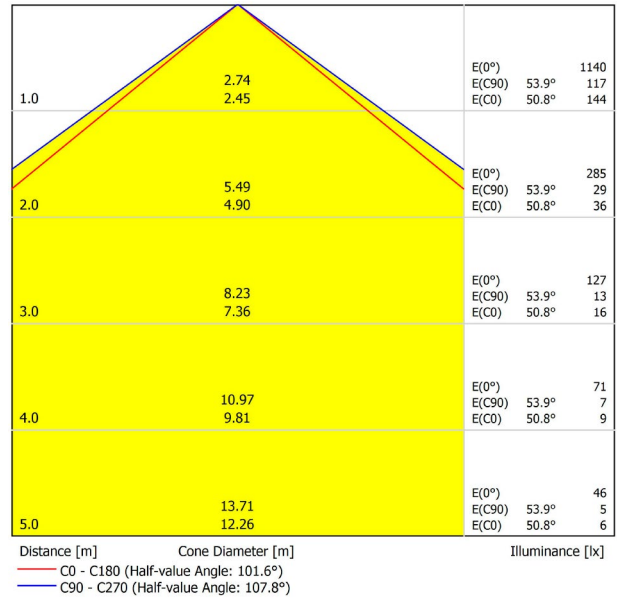

FIFTY 2 End Cap Kit Recessed	1050-00-20-   WT   NT
FIFTY Straight Joiner	1050-01-80
FIFTY Power Line	A231-00-00

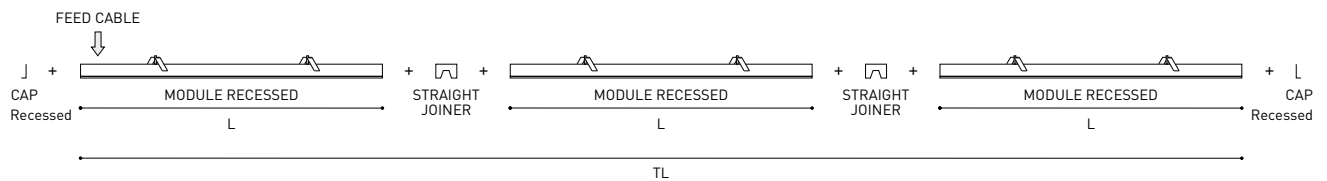

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL |  AL |