


DIMENSIONS



ACCESSORIES



CUSTOM ACCESSORIES  
(MANDATORY)

Name	FIFTY H0 RECESSED CUSTOM 300 3000K NT
Reference	A2911411NT
Color	Textured black
RAL	9005
Category	CUSTOM SYSTEMS

PRODUCT

FIFTY H0 RECESSED CUSTOM 300 3000K NT  
A2911411NT  
Textured black  
9005  
CUSTOM SYSTEMS

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	10750 Lm
Power	77 W
Power values of the system	89,53 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	140 Lm/W
Current intensity	900 mA
Control through bluetooth	Please Consult
Driver	Included - Fast Connect
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Recess measurements	2852 × 58 mm.
Diffuser included	Yes
Weight	11830 g.
Packaged weight	16230 g.
Packaging dimensions	Ø168 × 3005 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.


POLAR DIAGRAM



CONICAL DIAGRAM

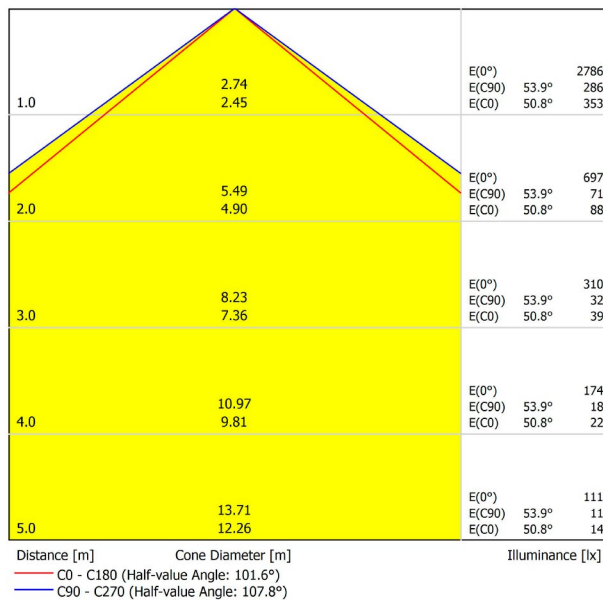

FIFTY 2 End Cap Kit Recessed	1050-00-20-   WT   NT
FIFTY Straight Joiner	1050-01-80
FIFTY Power Line	A231-00-00



COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |

MATERIAL |  AL |