



BUDDY

PURPOSEFUL DESIGN

ARKOSLIGHT



Compact and powerful

Innovative, state-of-the-art, super-efficient LED technology. Up to **200lm/W** luminous efficacy.

Buddy embodies the sophistication of downlight with its carefully crafted design and high-quality finishes. Compact aluminum body and precise lenses channel the full potential of this **new generation LED**.

Multiple fluxes and wattages available. Including **4W** for **800lm** and **11.5W** for **2120lm**.

One Buddy, multiple options

It has two installation modes: with a **light frame**, for fast and efficient installation; or **trimless**, for installation that is fully integrated into the architecture.

It also offers two additional versions: **fixed** or **tilting**. Highly functional, its Tilt version is fully adjustable. Thanks to its ability to tilt and swivel, once installed we can change its orientation with a simple manual adjustment.

Also available in different finishes.



355°



25°

A modern interior space with a large glass wall and a swimming pool at night. A woman in a black outfit stands in the glass doorway, looking out. The room has white walls, a light-colored floor, and a minimalist design. A small table with a glass bowl and a framed picture is visible on the left. The pool is on the right, and the night sky with some trees is visible through the glass.

Watertight and resistant

Thanks to its **IP54 high degree of protection**, even in its swiveling Tilt version, Buddy is extremely resistant to the penetration of dust and water particles.




Freedom of illumination, freedom of use

The Buddy family offers exceptional versatility with three beam opening options: **spot** / **medium** / **flood** / plus a **12° / 13° super spot** version.


This makes it an adaptable downlight, ideal for both general and accent lighting. Buddy is highly technical.

Thanks to its LED, high quality lenses and anti-glare shade, it provides uniform light flow and comfortable glare levels, ensuring an optimal lighting experience in any environment.

BUDDY / BUDDY L

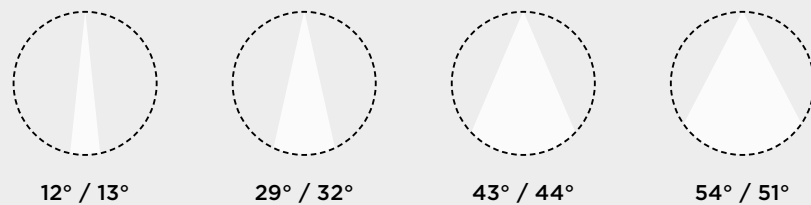


BUDDY / BUDDY L TUNABLE WHITE

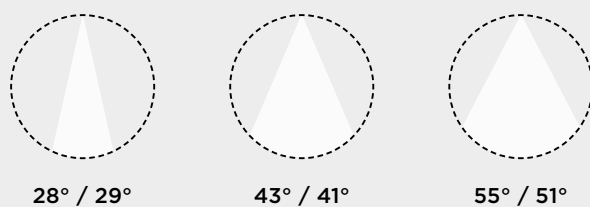

Buddy Super Spot

Super controlled beam (12° / 13°). Designed for use as an accent light, Buddy Super Spot also maintains a uniform light output and high visual comfort.

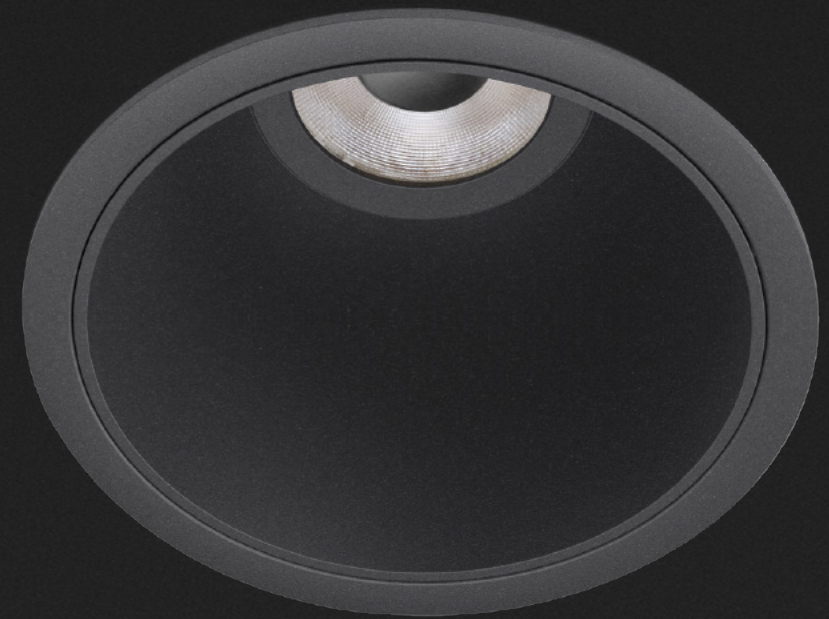

Buddy Wall Washer

The virtue of the Buddy wall washer lies in its optical system which, as an alternative to the asymmetric projection of the adjustable recessed luminaire, provides a uniform vertical light distribution without interruptions or changes in intensity. No interruptions or intensity variations. Available in recessed and trimless versions and with Tunable White technology, which allows the intensity and colour temperature to be adjusted.




Buddy Surface

Buddy is available as a surface-mounted downlight, distinguished by its compact size and suitable for installation on any material. One single family with everything you could ever need, designed by Rubén Saldaña.






100%flux - 3000K

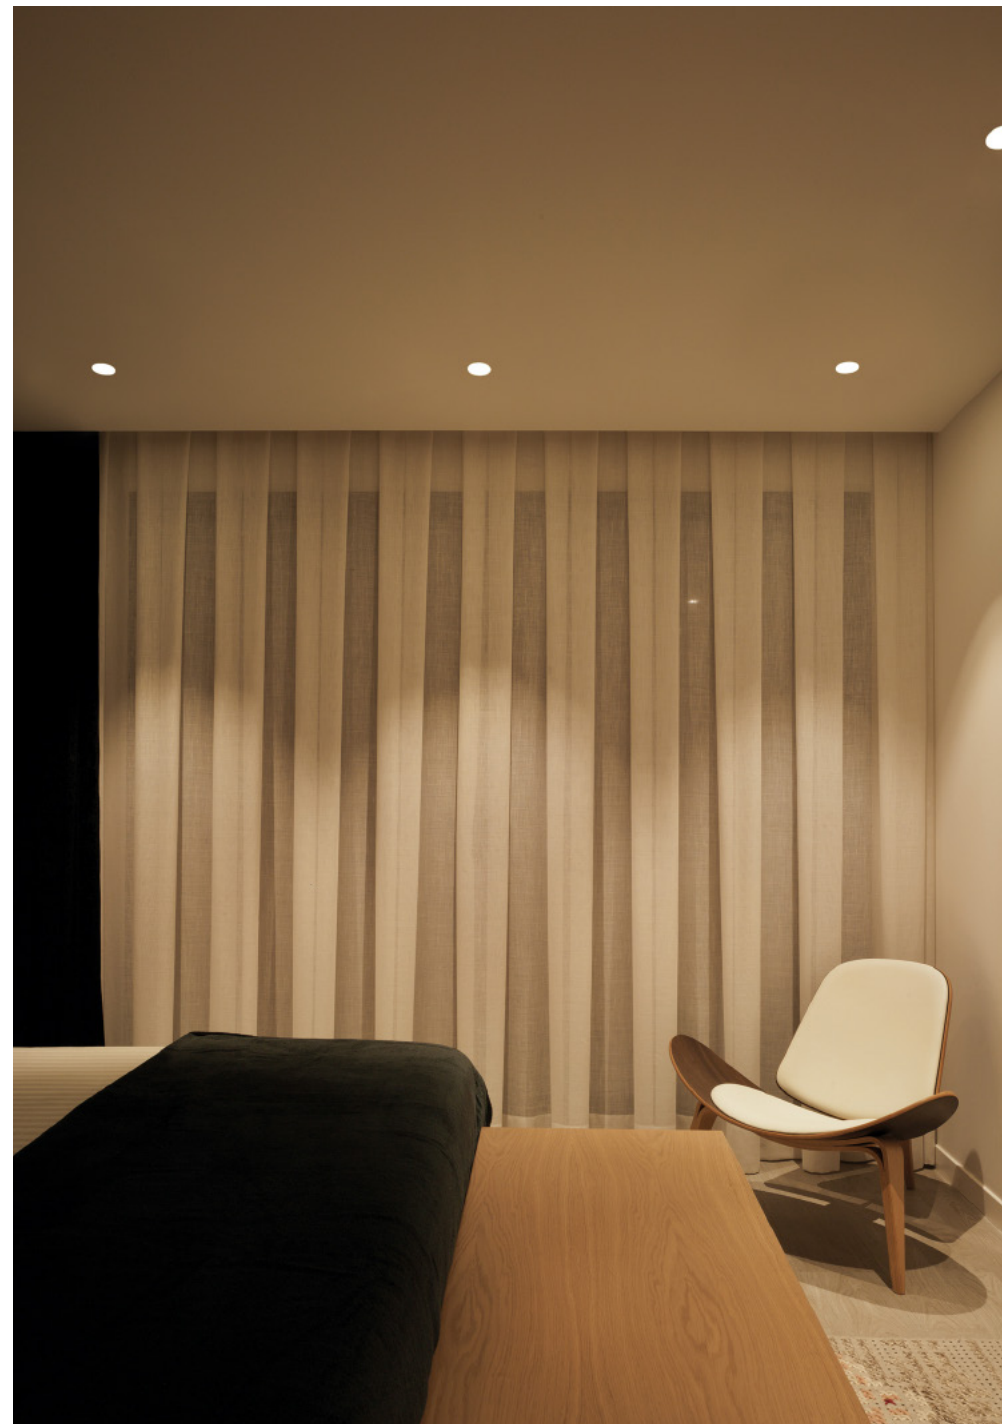

50%flux - 2400K

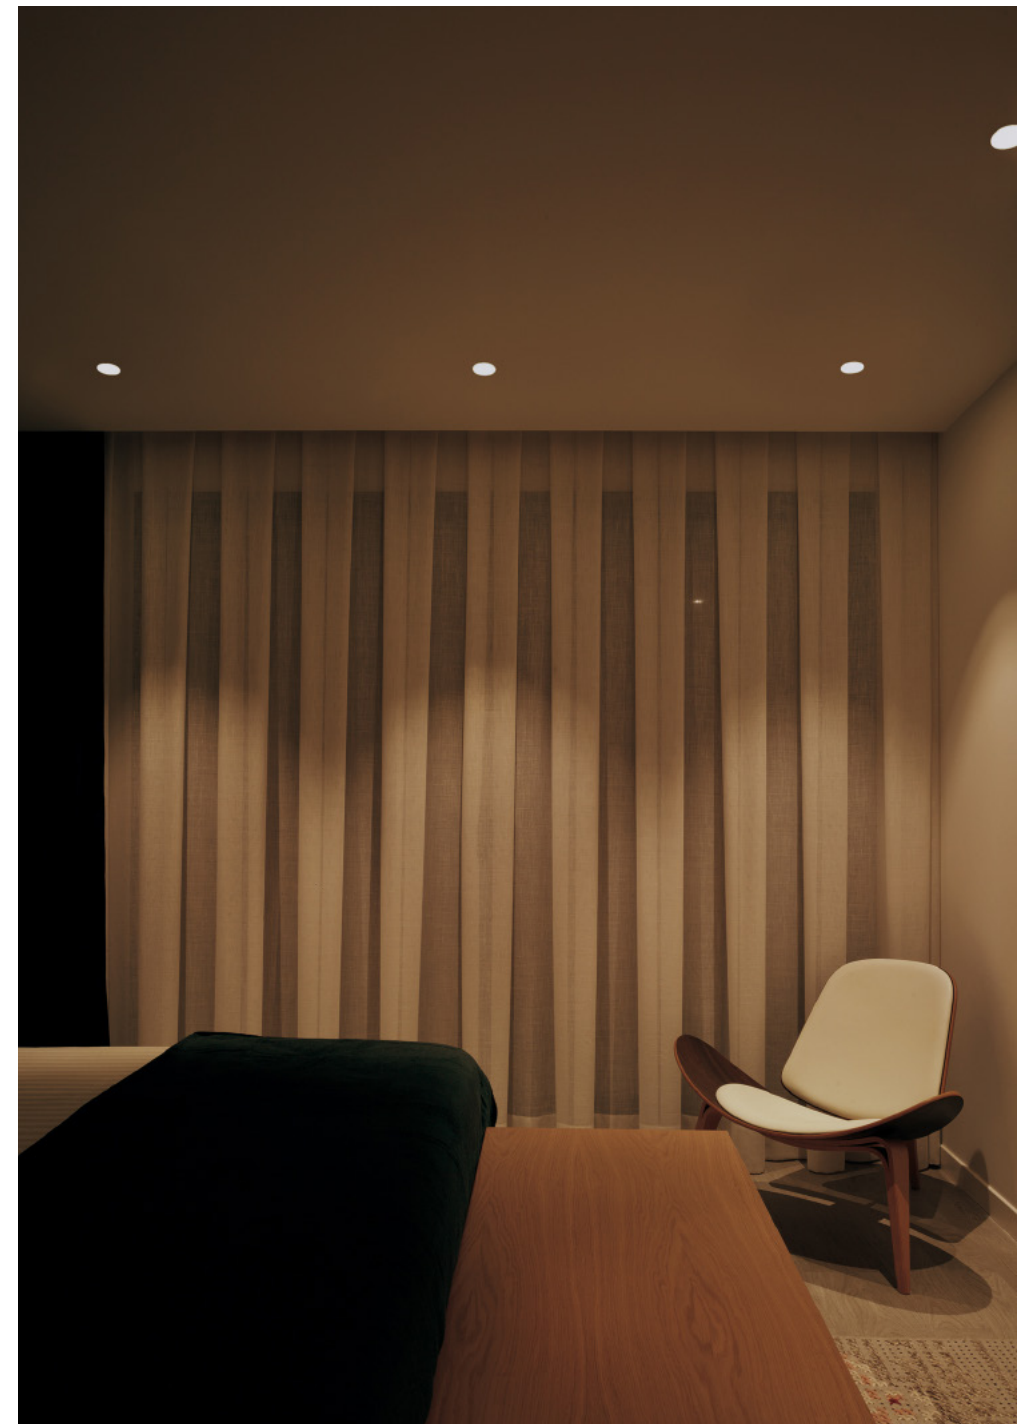

20%flux - 1800K

DIM to warm

At times of the day when activation and elevated biorhythms are desired, cool, abundant light is appropriate. Whereas, for periods when deactivation and relaxation are sought, warm temperature and essential light are most desirable.

Tunable white

Buddy Tunable White allows independent adjustment of colour temperature and light intensity, allowing total flexibility and reproduction of natural light throughout the day. This technology contributes to people's comfort and psychological well-being.



BUDDY
TECHNICAL
SPECIFICATIONS



VERSIONS



BUDDY



BUDDY TRIMLESS



BUDDY TILT



BUDDY TILT TRIMLESS



BUDDY WALL WASHER



BUDDY WALL WASHER TRIMLESS



BUDDY L



BUDDY L TRIMLESS



BUDDY L TILT



BUDDY L TILT TRIMLESS



BUDDY L



BUDDY L TRIMLESS

FINISHES



W



W



W



W



N




N



N




N



WG



G



WN



NG



WN

FINISHES



WTW



WT



NT



WTG



NTG



BUDDY

									CCT	Beam	LOR
BUDDY	A507-00-	○ -0-	W N WG NG WN						2700K	29° / 43° / 54°	○
	A507-00-	○ -1-	W N WG NG WN						3000K	29° / 43° / 54°	○
	A507-00-	○ -3-	W N WG NG WN						3500K	29° / 43° / 54°	○
	A507-00-	○ -2-	W N WG NG WN						4000K	29° / 43° / 54°	○

III

IP54

CRI>90

L80B10
>66,000h

MacAdam
Step 2

EXCL*

Ø79

UGR <19

									CCT	Beam	LOR
BUDDY Super Spot	A507-00-00-	W N WG NG WN							2700K	12°	62%
	A507-00-01-	W N WG NG WN							3000K	12°	62%
	A507-00-03-	W N WG NG WN							3500K	12°	62%
	A507-00-02-	W N WG NG WN							4000K	12°	62%

III

IP54

CRI>90

L80B10
>55,000h

MacAdam
Step 2

EXCL*

Ø79

UGR <19

									CCT	Beam	LOR
BUDDY Tunable White	A507-01-17-	W N WG NG WN							1800-4000K	28°	85%
	A507-01-18-	W N WG NG WN							2700-5000K	28°	85%
	A507-01-27-	W N WG NG WN							1800-4000K	43°	86%
	A507-01-28-	W N WG NG WN							2700-5000K	43°	86%
	A507-01-37-	W N WG NG WN							1800-4000K	55°	81%
	A507-01-38-	W N WG NG WN							2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
>55,000h

MacAdam
Step 3

EXCL*

Ø79

UGR <19

BUDDY DIM to warm	A507-02-39-	W N WG NG WN							1800-3000K	54°	75%
----------------------	-------------	----------------------	--	--	--	--	--	--	------------	-----	-----

III

IP54

CRI>90

L80B10
>55,000h

MacAdam
Step 3

EXCL*

Ø79

UGR <19


○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W □ | N ■ | WG □ ■ | NG ■ ■ | WN □ ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Trimless

		CCT	Beam	LOR
BUDDY Trimless	A507-10- -0- W N G	2700K	29° / 43° / 54°	
	A507-10- -1- W N G	3000K	29° / 43° / 54°	
	A507-10- -3- W N G	3500K	29° / 43° / 54°	
	A507-10- -2- W N G	4000K	29° / 43° / 54°	

III

IP54

CRI>90

L80B10
> 66.000 h

MacAdam
Step 2

EXCL*

EXCL**

Ø79

UGR <19

	CCT	Beam	LOR	
BUDDY Trimless Super Spot	A507-10-00- W N G	2700K	12°	62%
	A507-10-01- W N G	3000K	12°	62%
	A507-10-03- W N G	3500K	12°	62%
	A507-10-02- W N G	4000K	12°	62%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 2

EXCL*

EXCL**

Ø79

UGR <19

	CCT	Beam	LOR	
BUDDY Trimless Tunable White	A507-11-17- W N G	1800-4000K	28°	85%
	A507-11-18- W N G	2700-5000K	28°	85%
	A507-11-27- W N G	1800-4000K	43°	86%
	A507-11-28- W N G	2700-5000K	43°	86%
	A507-11-37- W N G	1800-4000K	55°	81%
	A507-11-38- W N G	2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 3

EXCL*

EXCL**

Ø79

UGR <19

	CCT	Beam	LOR	
BUDDY Trimless DIM to warm	A507-12-39- W N G	1800-3000K	54°	75%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 3

EXCL*

EXCL**

Ø79

UGR <19

	CCT	Beam	LOR	
BUDDY Trimless DIM to warm	A507-12-39- W N G	1800-3000K	54°	75%

	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY

BUDDY Trimless Accessory**


A507-10-90

MANDATORY FOR INSTALLATION

20

Ø 120

Ø79



OPTIONAL ACCESSORIES


BUDDY Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm

A478-00-05



COLOUR | W | N | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt

									CCT	Beam	LOR
BUDDY Tilt	A508-00-	○ -0-	W	N	WG	NG	WN		2700K	29° / 43° / 54°	○
	A508-00-	○ -1-	W	N	WG	NG	WN		3000K	29° / 43° / 54°	○
	A508-00-	○ -3-	W	N	WG	NG	WN		3500K	29° / 43° / 54°	○
	A508-00-	○ -2-	W	N	WG	NG	WN		4000K	29° / 43° / 54°	○

III

IP54

CRI>90

L80B10
> 66.000h

MacAdam
Step 2

EXCL*

355°

25°

Ø79



									CCT	Beam	LOR
BUDDY Tilt Super Spot	A508-00-00-		W	N	WG	NG	WN		2700K	12°	62%
	A508-00-01-		W	N	WG	NG	WN		3000K	12°	62%
	A508-00-03-		W	N	WG	NG	WN		3500K	12°	62%
	A508-00-02-		W	N	WG	NG	WN		4000K	12°	62%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 2

EXCL*

355°

25°

Ø79



									CCT	Beam	LOR
BUDDY Tilt Tunable White	A508-01-17-		W	N	WG	NG	WN		1800-4000K	28°	85%
	A508-01-18-		W	N	WG	NG	WN		2700-5000K	28°	85%
	A508-01-27-		W	N	WG	NG	WN		1800-4000K	43°	86%
	A508-01-28-		W	N	WG	NG	WN		2700-5000K	43°	86%
	A508-01-37-		W	N	WG	NG	WN		1800-4000K	55°	81%
	A508-01-38-		W	N	WG	NG	WN		2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

355°

25°

Ø79



									CCT	Beam	LOR
BUDDY Tilt DIM to warm	A508-02-39-		W	N	WG	NG	WN		1800-3000K	54°	75%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

355°

25°

Ø79




○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

OPTIONAL ACCESSORY

BUDDY Tilt

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W ☐ | N ☒ | WG ☐ | NG ☒ | WN ☐ | MATERIAL |  AL |  PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Tilt Trimless

				CCT	Beam	LOR
BUDDY Tilt Trimless	A508-10-	○ -0-	W N G	2700K	29° / 43° / 54°	○
	A508-10-	○ -1-	W N G	3000K	29° / 43° / 54°	○
	A508-10-	○ -3-	W N G	3500K	29° / 43° / 54°	○
	A508-10-	○ -2-	W N G	4000K	29° / 43° / 54°	○

III

IP54

CRI>90

L80B10
> 66.000h

MacAdam
Step 2

EXCL*

EXCL**

25°

Ø79

				CCT	Beam	LOR
BUDDY Tilt Trimless Super Spot	A508-10-00-	W N G		2700K	12°	62%
	A508-10-01-	W N G		3000K	12°	62%
	A508-10-03-	W N G		3500K	12°	62%
	A508-10-02-	W N G		4000K	12°	62%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 2

EXCL*

EXCL**

25°

Ø79

				CCT	Beam	LOR
BUDDY Tilt Trimless Tunable White	A508-11-17-	W N G		1800-4000K	28°	85%
	A508-11-18-	W N G		2700-5000K	28°	85%
	A508-11-27-	W N G		1800-4000K	43°	86%
	A508-11-28-	W N G		2700-5000K	43°	86%
	A508-11-37-	W N G		1800-4000K	55°	81%
	A508-11-38-	W N G		2700-5000K	55°	81%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

EXCL**

25°

Ø79

				CCT	Beam	LOR
BUDDY Tilt Trimless DIM to warm	A508-12-39-	W N G		1800-3000K	54°	75%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

EXCL**

25°

Ø79

○	BEAM	LOR
1	29°	82%
2	43°	83%
3	54°	80%

ACCESSORY

BUDDY Tilt Trimless Accessory**

A508-10-90

MANDATORY FOR INSTALLATION

Ø79

OPTIONAL ACCESSORIES




BUDDY Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm

A478-00-05



COLOUR | W □ | N ■ | G ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT OPTIONS PLEASE CONSULT



BUDDY Wall Washer

					CCT	LOR
BUDDY Wall Washer	A509-00-10-	W	N	WN	2700K	48%
	A509-00-11-	W	N	WN	3000K	48%
	A509-00-13-	W	N	WN	3500K	48%
	A509-00-12-	W	N	WN	4000K	48%

III

IP20

CRI>90

L80B10
>66,000h

MacAdam Step 2

EXCL*

360°

Ø79



					CCT	LOR
BUDDY Wall Washer Tunable White	A509-01-17-	W	N	WN	1800-4000K	49%
	A509-01-18-	W	N	WN	2700-5000K	49%

III

IP20

CRI>90

L80B10
>55,000h

MacAdam Step 3

EXCL*

360°

Ø79




OPTIONAL ACCESSORY

BUDDY Wall Washer

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS



COLOUR | W ☐ | N ☒ | WN ☐ | MATERIAL | AL ☒ | PC/PMMA ☐

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT



BUDDY Wall Washer Trimless

					CCT	LOR
BUDDY Wall Washer Trimless	A509-10-10-	W	N		2700K	48%
	A509-10-11-	W	N		3000K	48%
	A509-10-13-	W	N		3500K	48%
	A509-10-12-	W	N		4000K	48%

III

IP20

CRI>90

L80B10
>66,000h

MacAdam Step 2

EXCL*

EXCL**

Ø79

					CCT	LOR
BUDDY Wall Washer Trimless Tunable White	A509-11-17-	W	N		1800-4000K	49%
	A509-11-18-	W	N		2700-5000K	49%

III

IP20

CRI>90

L80B10
>55,000h

MacAdam Step 3

EXCL*

EXCL**

Ø79

ACCESSORY

BUDDY Wall Washer


Trimless Accessory**

A509-10-90

MANDATORY FOR INSTALLATION

19

Ø79



OPTIONAL ACCESSORIES



BUDDY Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D79 X D120mm










A478-00-05



COLOUR | W □ | N ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS
OTHER CCT & DIM OPTIONS PLEASE CONSULT

BUDDY DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux
BUDDY 1 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless		 NO DIM	0434-01-85	4 W	125mA	2700K	760 lm
						3000K	790 lm
						3500K	795 lm
						4000K	800 lm
BUDDY 2 Buddy Buddy Trimless Buddy Tilt Buddy Tilt Trimless Buddy Wall Washer Buddy Wall Washer Trimless		 NO DIM	0434-01-86				
		 DALI	0434-01-89	6,6W	200mA	2700K	1150 lm
						3000K	1200 lm
						3500K	1210 lm
						4000K	1220 lm
		 CASAMBI	0434-01-91				
		 PHASE CUT	0434-01-92				
BUDDY Super Spot		 NO DIM	0434-01-87	6 W	500mA	2700K	750 lm
						3000K	790 lm
						3500K	825 lm
						4000K	845 lm
BUDDY Tunable White		 DALI	0434-01-90	6,7W	400mA	1800-4000K	690 lm
						2700-5000K	815 lm
BUDDY DIM to warm		 DALI	0434-01-94	6 W	350mA	1800-3000K	650 lm
		 PHASE CUT	0434-01-95				
BUDDY Wall Washer Tunable White		 DALI	0434-01-96	8,4W	500mA	1800-4000K	830 lm
						2700-5000K	1000 lm

220
240 V~ | 48V PLEASE CONSULT



BUDDY L

		CCT			Beam			LOR		
BUDDY L	A568-00- ○ -0-	W	N	WG	NG	WN		2700K	32° / 44° / 51°	○
	A568-00- ○ -1-	W	N	WG	NG	WN		3000K	32° / 44° / 51°	○
	A568-00- ○ -3-	W	N	WG	NG	WN		3500K	32° / 44° / 51°	○
	A568-00- ○ -2-	W	N	WG	NG	WN		4000K	32° / 44° / 51°	○
BUDDY L Super Spot	A568-00-00-	W	N	WG	NG	WN		2700K	13°	67%
	A568-00-01-	W	N	WG	NG	WN		3000K	13°	67%
	A568-00-03-	W	N	WG	NG	WN		3500K	13°	67%
	A568-00-02-	W	N	WG	NG	WN		4000K	13°	67%

III

IP54

CRI>90

L80B10
> 66.000 h

MacAdam
Step 2

EXCL*

Ø105

UGR <19

		CCT			Beam			LOR		
BUDDY L Tunable White	A568-01-17-	W	N	WG	NG	WN		1800-4000K	29°	78%
	A568-01-18-	W	N	WG	NG	WN		2700-5000K	29°	78%
	A568-01-27-	W	N	WG	NG	WN		1800-4000K	41°	83%
	A568-01-28-	W	N	WG	NG	WN		2700-5000K	41°	83%
	A568-01-37-	W	N	WG	NG	WN		1800-4000K	51°	84%
	A568-01-38-	W	N	WG	NG	WN		2700-5000K	51°	84%
BUDDY L DIM to warm	A568-02-39-	W	N	WG	NG	WN		1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam
Step 3

EXCL*

Ø105

UGR <19


○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L


BUDDY L Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Trimless

		CCT	Beam	LOR
BUDDY L Trimless	A568-10- ○ -0- W N G	2700K	32° / 44° / 51°	○
	A568-10- ○ -1- W N G	3000K	32° / 44° / 51°	○
	A568-10- ○ -3- W N G	3500K	32° / 44° / 51°	○
	A568-10- ○ -2- W N G	4000K	32° / 44° / 51°	○
BUDDY L Trimless Super Spot	A568-10-00- W N G	2700K	13°	67%
	A568-10-01- W N G	3000K	13°	67%
	A568-10-03- W N G	3500K	13°	67%
	A568-10-02- W N G	4000K	13°	67%

III

IP54

CRI>90

L80B10
>66.000h

MacAdam
Step 2

EXCL*

EXCL**

Ø105

UGR <19

		CCT	Beam	LOR
BUDDY L Trimless Tunable White	A568-11-17- W N G	1800-4000K	29°	78%
	A568-11-18- W N G	2700-5000K	29°	78%
	A568-11-27- W N G	1800-4000K	41°	83%
	A568-11-28- W N G	2700-5000K	41°	83%
	A568-11-37- W N G	1800-4000K	51°	84%
	A568-11-38- W N G	2700-5000K	51°	84%
BUDDY L Trimless DIM to warm	A568-12-39- W N G	1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
>55.000h

MacAdam
Step 3

EXCL*

EXCL**

Ø105

UGR <19


○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A568-10-90

MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

BUDDY L


BUDDY L Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06



COLOUR | W □ | N ■ | WG □ ■ | NG ■ ■ | WN □ ■ | G □ ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt

									CCT	Beam	LOR
BUDDY L Tilt	A569-00-	○ -0-	W N	WG	NG WN				2700K	32° / 44° / 51°	○
	A569-00-	○ -1-	W N	WG	NG WN				3000K	32° / 44° / 51°	○
	A569-00-	○ -3-	W N	WG	NG WN				3500K	32° / 44° / 51°	○
	A569-00-	○ -2-	W N	WG	NG WN				4000K	32° / 44° / 51°	○
BUDDY L Tilt Super Spot	A569-00-00-		W N	WG	NG WN				2700K	13°	67%
	A569-00-01-		W N	WG	NG WN				3000K	13°	67%
	A569-00-03-		W N	WG	NG WN				3500K	13°	67%
	A569-00-02-		W N	WG	NG WN				4000K	13°	67%

III

IP54

CRI>90

L80B10
> 66.000h

MacAdam
Step 2

EXCL*

355°

25°

Ø105

									CCT	Beam	LOR
BUDDY L Tilt Tunable White	A569-01-17-		W N	WG	NG WN				1800-4000K	29°	78%
	A569-01-18-		W N	WG	NG WN				2700-5000K	29°	78%
	A569-01-27-		W N	WG	NG WN				1800-4000K	41°	83%
	A569-01-28-		W N	WG	NG WN				2700-5000K	41°	83%
	A569-01-37-		W N	WG	NG WN				1800-4000K	51°	84%
	A569-01-38-		W N	WG	NG WN				2700-5000K	51°	84%
BUDDY L Tilt DIM to warm	A569-02-39-		W N	WG	NG WN				1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
> 55.000h

MacAdam
Step 3

EXCL*

355°

25°

Ø105

○	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION

20

Ø145

Ø112

97

MIN 120

OPTIONAL ACCESSORIES

BUDDY L Tilt

BUDDY L Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06

Ø105

Ø145

COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Tilt Trimless

		CCT	Beam	LOR
BUDDY L Tilt Trimless	A569-10- 0 -0- W N G	2700K	32° / 44° / 51°	0
	A569-10- 0 -1- W N G	3000K	32° / 44° / 51°	0
	A569-10- 0 -3- W N G	3500K	32° / 44° / 51°	0
	A569-10- 0 -2- W N G	4000K	32° / 44° / 51°	0
BUDDY L Tilt Trimless Super Spot	A569-10-00- W N G	2700K	13°	67%
	A569-10-01- W N G	3000K	13°	67%
	A569-10-03- W N G	3500K	13°	67%
	A569-10-02- W N G	4000K	13°	67%

III

IP54

CRI>90

L80B10
> 66.000 h

MacAdam Step 2

EXCL*

EXCL**

25°

Ø105

		CCT	Beam	LOR
BUDDY L Tilt Trimless Tunable White	A569-11-17- W N G	1800-4000K	29°	78%
	A569-11-18- W N G	2700-5000K	29°	78%
	A569-11-27- W N G	1800-4000K	41°	83%
	A569-11-28- W N G	2700-5000K	41°	83%
	A569-11-37- W N G	1800-4000K	51°	84%
	A569-11-38- W N G	2700-5000K	51°	84%
BUDDY L Tilt Trimless DIM to warm	A569-12-39- W N G	1800-3000K	56°	82%

III

IP54

CRI>90

L80B10
> 55.000 h

MacAdam Step 3

EXCL*

EXCL**

25°

Ø105

0	BEAM	LOR
1	32°	76%
2	44°	82%
3	51°	85%

ACCESSORY

BUDDY L Trimless Accessory**

A569-10-90

MANDATORY FOR INSTALLATION

20

Ø145

Ø100

97

MIN 120

↑↑↑

IP54

OPTIONAL ACCESSORIES

BUDDY L Tilt

BUDDY L Tilt Trimless

High Chromatic LED

NOT SOLD SEPARATELY | AFFECTS THE LIGHTING PARAMETERS

TRIMLESS TOOL D105 X D145mm

A478-00-06

Ø105

Ø145

COLOUR | W | N | WG | NG | WN | G | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS



BUDDY L Wall Washer

						CCT	LOR
BUDDY L Wall Washer	A573-00-10-	W	N	WN		2700K	54%
	A573-00-11-	W	N	WN		3000K	54%
	A573-00-13-	W	N	WN		3500K	54%
	A573-00-12-	W	N	WN		4000K	54%

III

IP20

CRI>90

L80B10
>66,000h

MacAdam
Step 2

EXCL*

360°

Ø105

						CCT	LOR
BUDDY L Wall Washer Tunable White	A573-01-17-	W	N	WN		1800-4000K	54%
	A573-01-18-	W	N	WN		2700-5000K	54%

III

IP20

CRI>90


L80B10
>55,000h

MacAdam
Step 3

EXCL*


360°

Ø105



COLOUR | W ☐ | N ☒ | WN ☐ | MATERIAL | AL ☒ | PC/PMMA ☐ |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

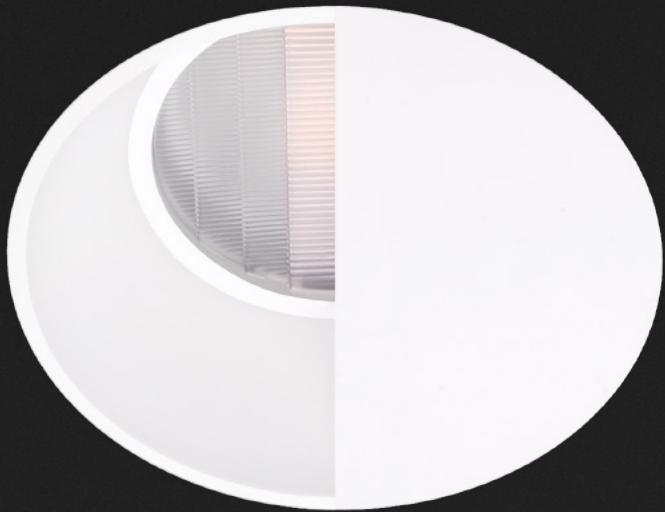

BUDDY L Wall Washer Trimless

					CCT	LOR
BUDDY L Wall Washer Trimless	A573-10-10-	W	N		2700K	54%
	A573-10-11-	W	N		3000K	54%
	A573-10-13-	W	N		3500K	54%
	A573-10-12-	W	N		4000K	54%

III

IP20

CRI>90

L80B10
>66.000h

					CCT	LOR
BUDDY L Wall Washer Trimless Tunable White	A573-11-17-	W	N		1800-4000K	54%
	A573-11-18-	W	N		2700-5000K	54%

III

IP20

CRI>90

L80B10
>55.000h


ACCESSORY

BUDDY L Wall Washer

Trimless Accessory**

A573-10-90


MANDATORY FOR INSTALLATION



OPTIONAL ACCESSORIES

TRIMLESS TOOL D105 X D145mm






A478-00-06



COLOUR | W □ | N ■ | MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

BUDDY L DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux		
BUDDY L 1 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless			NO DIM	0433-01-37	8,1W	250mA	2700K	1500 lm	
							3000K	1560 lm	
							3500K	1600 lm	
							4000K	1600 lm	
BUDDY L 2 Buddy L Buddy L Trimless Buddy L Tilt Buddy L Tilt Trimless Buddy L Wall Washer Buddy L Wall Washer Trimless			NO DIM	0433-00-21					
			DALI	0433-01-40	11,5W	350mA	2700K	2010 lm	
							3000K	2090 lm	
			CASAMBI	0433-01-43			3500K	2120 lm	
							4000K	2120 lm	
			PHASE CUT	0433-01-39					
	BUDDY L Super Spot			NO DIM	0433-01-38			2700K	1430 lm
3000K								1510 lm	
			DALI	0433-01-41	11,6W	650mA	3500K	1570 lm	
							4000K	1610 lm	
			CASAMBI	0434-01-98					
BUDDY L Tunable White			DALI	0433-01-42	11,6W	350mA	1800-4000K	1270 lm	
							2700-5000K	1630 lm	
BUDDY L DIM to warm			DALI	0433-01-40					
			CASAMBI	0433-01-43	11,6W	350mA	1800-3000K	1280 lm	
		PHASE CUT	0433-01-39						

220
240 V~ | 48V PLEASE CONSULT



BUDDY Surface

		CCT	Beam	LOR
BUDDY Surface	A594-00- ○ -0- WT NT WTG NTG WTW	2700K	29° / 43° / 54°	○
	A594-00- ○ -1- WT NT WTG NTG WTW	3000K	29° / 43° / 54°	○
	A594-00- ○ -3- WT NT WTG NTG WTW	3500K	29° / 43° / 54°	○
	A594-00- ○ -2- WT NT WTG NTG WTW	4000K	29° / 43° / 54°	○
BUDDY Surface Super Spot	A594-00-00- WT NT WTG NTG WTW	2700K	12°	62%
	A594-00-01- WT NT WTG NTG WTW	3000K	12°	62%
	A594-00-03- WT NT WTG NTG WTW	3500K	12°	62%
	A594-00-02- WT NT WTG NTG WTW	4000K	12°	62%

III

IP20

CRI>90

L80B10
>66.000 h

L80B10
>55.000 h (Super Spot)

MacAdam
Step 2

OPTIONS*

EXCL*

UGR <19

		CCT	Beam	LOR
BUDDY Surface Tunable White	A594-01-17- WT NT WTG NTG WTW	1800-4000K	28°	85%
	A594-01-18- WT NT WTG NTG WTW	2700-5000K	28°	85%
	A594-01-27- WT NT WTG NTG WTW	1800-4000K	43°	86%
	A594-01-28- WT NT WTG NTG WTW	2700-5000K	43°	86%
	A594-01-37- WT NT WTG NTG WTW	1800-4000K	55°	81%
	A594-01-38- WT NT WTG NTG WTW	2700-5000K	55°	81%
BUDDY Surface DIM to warm	A594-02-39- WT NT WTG NTG WTW	1800-3000K	54°	75%

III

IP20

CRI>90

L80B10
>55.000 h


MacAdam
Step 3

OPTIONS*

EXCL*

UGR <19

○	BEAM	LOR	OPTIONAL ACCESSORY		FINISHING	Body	Lampshade
1	29°	82%	BUDDY Surface		WT	WT ☐	N ☒
2	43°	83%	High Chromatic LED		NT	NT ☒	N ☒
3	54°	80%	NOT SOLD SEPARATELY AFFECTS THE LIGHTING PARAMETERS		WTG	WT ☐	G ☒
					NTG	NT ☒	G ☒
					WTW	WT ☐	W ☐
















COLOUR | WT ☐ | NT ☒ | WTG ☐ | NTG ☒ | WTW ☐ |

MATERIAL | AL | PC/PMMA |

COLOURS MAY AFFECT THE LIGHTING PARAMETERS

BUDDY Surface DRIVERS

*DRIVER OPTIONS				P	I	CCT	Flux
BUDDY Surface 1		 NO DIM	0434-01-85	4W	125mA	2700K	770 lm
						3000K	800 lm
						3500K	810 lm
						4000K	820 lm
BUDDY Surface 2		 NO DIM	0434-01-86	6,6W	200mA	2700K	1190 lm
						3000K	1240 lm
						3500K	1250 lm
						4000K	1260 lm
BUDDY Surface 2		 NO DIM	0433-01-37	6,6W	200mA		
		 DALI	0434-01-29			2700K	1440 lm
		 CASAMBI	0434-03-02			3000K	1500 lm
		 PHASE CUT	0434-03-03			3500K	1520 lm
						4000K	1530 lm
BUDDY Surface Super Spot		 NO DIM	0433-00-27	8,8W	700mA	2700K	970 lm
						3000K	1020 lm
		 DALI	0434-03-01			3500K	1060 lm
BUDDY Surface Tunable White		 DALI	0434-01-96	8,5W	500mA	1800-4000K	860 lm
						2700-5000K	1030 lm
BUDDY Surface DIM to warm		 DALI	0434-01-94	6W	350mA	1800-3000K	670 lm
		 PHASE CUT	0434-01-95				

220
240 V~ | DRIVER MUST BE PLACED ON REMOTE

BUDDY
PURPOSEFUL
DESIGN

by **ARKOSLIGHT**