




## DIMENSIONS



## AWARDS

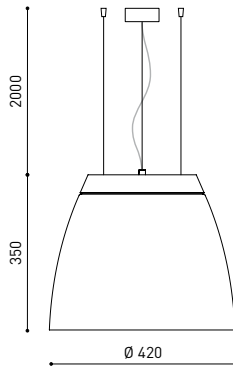

Name	SALT 5 DIM 1/10V 4000K TW
Reference	A2200532TW
Color	Transparent-White
Power of the system	Transparent & 9016
Category	SUSPENSION

## PRODUCT

Light source	LED
Gross luminous flux	5225 Lm
Power	35 W
Power values of the system	38,89 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	91°
Lighting efficiency	84%
Efficacy	149 Lm/W
Current intensity	900 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

## LIGHTING INFORMATION


Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	5100 g.
Packaged weight	5829,4 g.
Packaging dimensions	452 × 452 × 418 mm.
Units per package	1
Materials	Aluminium / Polycarbonate / Polymethyl Methacrylate

## OTHER DATA




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

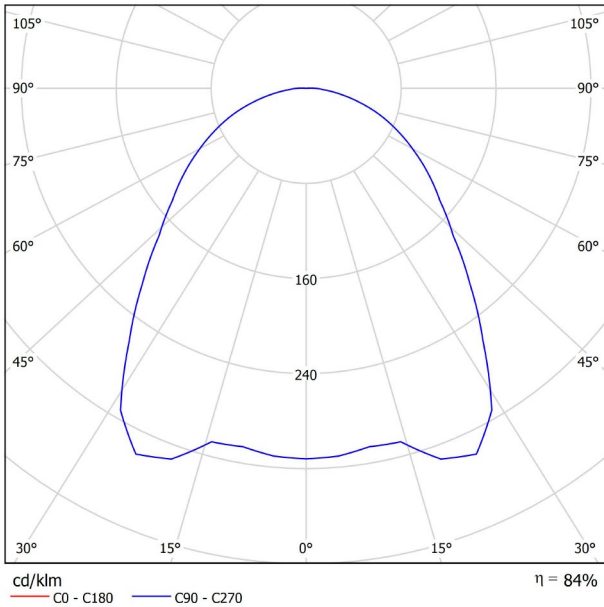

CONICAL DIAGRAM

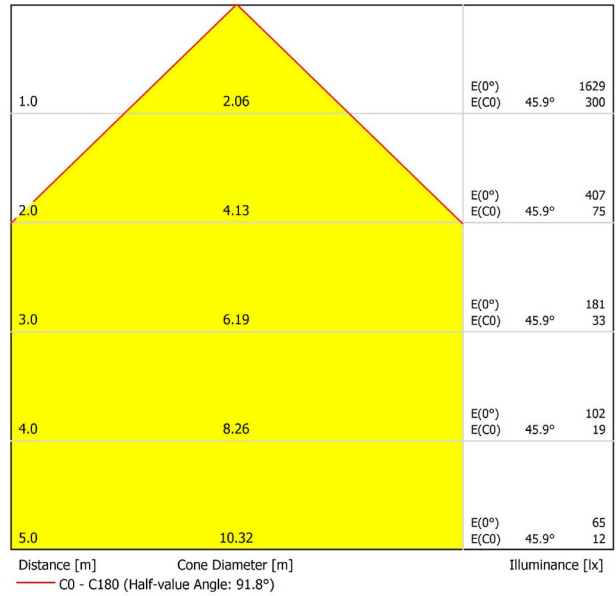

UGR

Glare Evaluation According to UGR													
ρ Ceiling	70	70	50	50	30	70	70	50	50	30			
ρ Walls	50	30	50	30	30	50	30	50	30	30			
ρ Floor	20	20	20	20	20	20	20	20	20	20			
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
X	Y	2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H
2H	2H	19.0	20.2	19.3	20.5	20.7	19.0	20.2	19.3	20.5	20.7	19.0	20.2
2H	3H	20.8	21.9	21.1	22.2	22.5	20.8	21.9	21.1	22.2	22.5	20.8	21.9
2H	4H	21.5	22.5	21.8	22.8	23.1	21.5	22.5	21.8	22.8	23.1	21.5	22.5
2H	6H	22.0	23.0	22.4	23.3	23.6	22.0	23.0	22.4	23.3	23.6	22.0	23.0
2H	8H	22.2	23.2	22.6	23.5	23.8	22.2	23.2	22.6	23.5	23.8	22.2	23.2
2H	12H	22.4	23.3	22.8	23.6	23.9	22.4	23.3	22.8	23.6	23.9	22.4	23.3
4H	2H	19.6	20.6	19.9	20.9	21.2	19.6	20.6	19.9	20.9	21.2	19.6	20.6
4H	3H	21.6	22.5	22.0	22.8	23.2	21.6	22.5	22.0	22.8	23.2	21.6	22.5
4H	4H	22.4	23.2	22.8	23.6	24.0	22.4	23.2	22.8	23.6	24.0	22.4	23.2
4H	6H	23.1	23.8	23.5	24.2	24.6	23.1	23.8	23.5	24.2	24.6	23.1	23.8
4H	8H	23.4	24.0	23.8	24.4	24.8	23.4	24.0	23.8	24.4	24.8	23.4	24.0
4H	12H	23.6	24.2	24.0	24.6	25.0	23.6	24.2	24.0	24.6	25.0	23.6	24.2
8H	4H	22.8	23.4	23.2	23.8	24.2	22.8	23.4	23.2	23.8	24.2	22.8	23.4
8H	6H	23.6	24.1	24.1	24.5	25.0	23.6	24.1	24.1	24.5	25.0	23.6	24.1
8H	8H	24.0	24.4	24.4	24.9	25.3	24.0	24.4	24.4	24.9	25.3	24.0	24.4
8H	12H	24.3	24.7	24.8	25.1	25.6	24.3	24.7	24.8	25.1	25.6	24.3	24.7
12H	4H	22.8	23.4	23.2	23.8	24.2	22.8	23.4	23.2	23.8	24.2	22.8	23.4
12H	6H	23.7	24.1	24.2	24.6	25.1	23.7	24.1	24.2	24.6	25.1	23.7	24.1
12H	8H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5	24.1	24.5
Variation of the observer position for the luminaire distances S													
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2						
S = 1.5H		+0.2 / -0.4					+0.2 / -0.4						
S = 2.0H		+0.3 / -0.7					+0.3 / -0.7						
Standard table		BK06					BK06						
Correction Summand		0.5					0.5						
Corrected Glare Indices referring to 5225lm Total Luminous Flux													