




## DIMENSIONS



## AWARDS

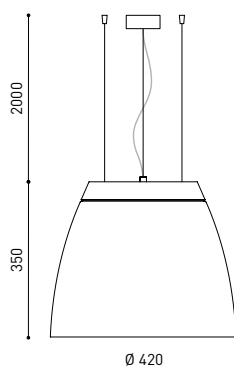

Name	SALT 6 DIM 1/10V 4000K WW
Reference	A2200632WW
Color	White-White
Power of the system	9016 & 9016
Category	SUSPENSION

## PRODUCT

SALT 6 DIM 1/10V 4000K WW

A2200632WW

White-White

9016 &amp; 9016

SUSPENSION

Light source	LED
Gross luminous flux	6650 Lm
Power	47,5 W
Power values of the system	52,78 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	77°
Lighting efficiency	79%
Efficacy	140 Lm/W
Current intensity	1200 mA
Dimming	1-10V
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

## LIGHTING INFORMATION

LED

6650 Lm

47,5 W

52,78 W

4000 K

CRI&gt;90

Mac Adam Step 2

77°

79%

140 Lm/W

1200 mA

1-10V

Please Consult

Included

⊕

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=80°C) &gt;60.000h

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	4600 g.
Packaged weight	5329,4 g.
Packaging dimensions	452 × 452 × 418 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

## OTHER DATA

IP20

2 m

Yes

4600 g.

5329,4 g.

452 × 452 × 418 mm.


1

Aluminium / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

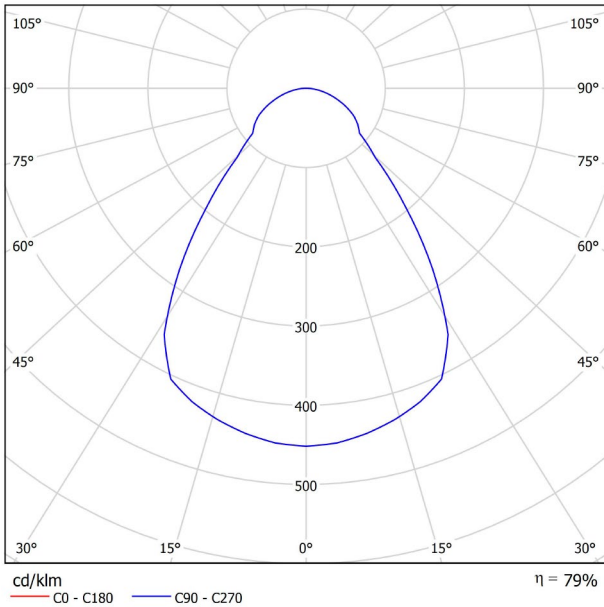

CONICAL DIAGRAM

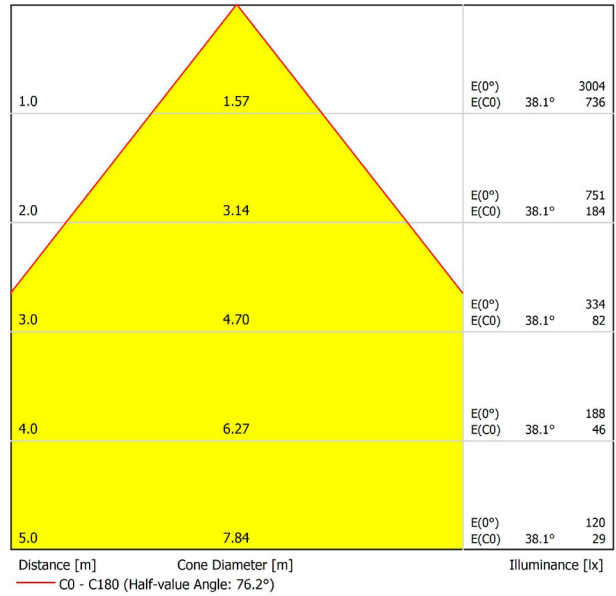

UGR

Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30		
ρ Walls	50	30	50	30	30	50	30	50	30	30		
ρ Floor	20	20	20	20	20	20	20	20	20	20		
Room Size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H		17.1	18.1	17.4	18.4	18.6	17.1	18.1	17.4	18.4	18.6
	3H		18.9	19.9	19.2	20.1	20.4	18.9	19.9	19.2	20.1	20.4
	4H		19.6	20.5	19.9	20.7	21.0	19.6	20.5	19.9	20.7	21.0
	6H		20.1	20.9	20.4	21.2	21.5	20.1	20.9	20.4	21.2	21.5
	8H		20.3	21.1	20.6	21.4	21.7	20.3	21.1	20.6	21.4	21.7
4H	12H		20.4	21.2	20.8	21.5	21.8	20.4	21.2	20.8	21.5	21.8
	2H		17.7	18.6	18.0	18.9	19.1	17.7	18.6	18.0	18.9	19.1
	3H		19.7	20.5	20.1	20.8	21.1	19.7	20.5	20.1	20.8	21.1
	4H		20.5	21.2	20.9	21.5	21.9	20.5	21.2	20.9	21.5	21.9
	6H		21.2	21.8	21.6	22.1	22.5	21.2	21.8	21.6	22.1	22.5
8H	8H		21.4	22.0	21.9	22.3	22.8	21.4	22.0	21.9	22.3	22.8
	12H		21.6	22.1	22.1	22.5	22.9	21.6	22.1	22.1	22.5	22.9
	4H		20.8	21.4	21.3	21.8	22.2	20.8	21.4	21.3	21.8	22.2
	6H		21.6	22.1	22.1	22.5	22.9	21.6	22.1	22.1	22.5	22.9
	8H		22.0	22.3	22.4	22.8	23.3	22.0	22.3	22.4	22.8	23.3
12H	12H		22.2	22.5	22.7	23.0	23.5	22.2	22.5	22.7	23.0	23.5
	4H		20.9	21.3	21.3	21.8	22.2	20.9	21.3	21.3	21.8	22.2
	6H		21.7	22.1	22.2	22.5	23.0	21.7	22.1	22.2	22.5	23.0
8H		22.1	22.4	22.6	22.9	23.4	22.1	22.4	22.6	22.9	23.4	
Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.3 / -0.3					+0.3 / -0.3						
S = 1.5H	+0.7 / -0.5					+0.7 / -0.5						
S = 2.0H	+1.3 / -0.8					+1.3 / -0.8						
Standard table	BK05					BK05						
Correction Summand	-2.8					-2.8						
Corrected Glare Indices referring to 6650lm Total Luminous Flux												