




DIMENSIONS



AWARDS

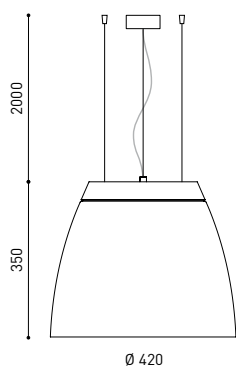

Name	SALT 6 DIM DALI 3000K TW
Reference	A2200641TW
Color	Transparent-White
Power of the system	Transparent & 9016
Category	SUSPENSION

PRODUCT

SALT 6 DIM DALI 3000K TW

A2200641TW

Transparent-White

Transparent & 9016

SUSPENSION

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	6550 Lm
Power	47,5 W
Power values of the system	52,78 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	91°
Lighting efficiency	84%
Efficacy	138 Lm/W
Current intensity	1200 mA
Dimming	DALI
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊕
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Cord length	2 m
Fast adjustment tensioner	Yes
Weight	5100 g.
Packaged weight	5829,4 g.
Packaging dimensions	452 × 452 × 418 mm.
Units per package	1
Materials	Aluminium / Polycarbonate / Polymethyl Methacrylate




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

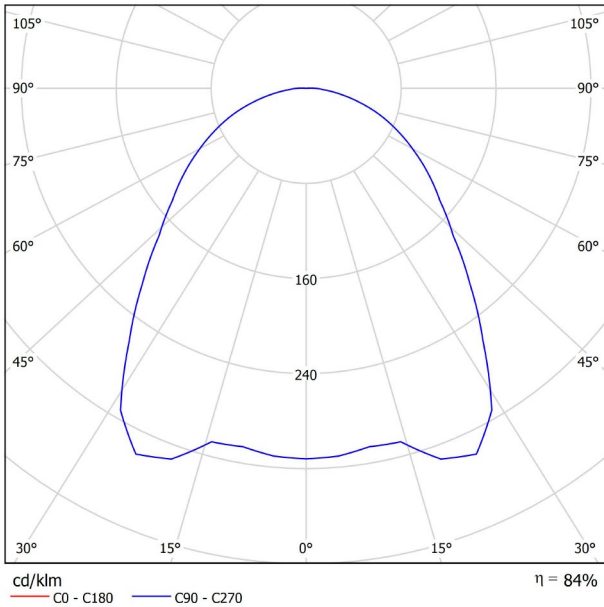

CONICAL DIAGRAM

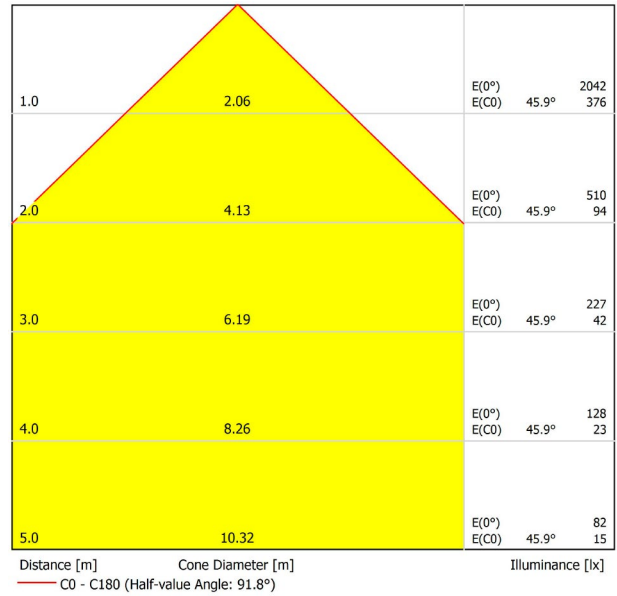

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19.8	21.0	20.1	21.3	21.5	19.8	21.0	20.1	21.3	21.5
	3H	21.6	22.7	21.9	23.0	23.2	21.6	22.7	21.9	23.0	23.2
	4H	22.3	23.3	22.6	23.6	23.9	22.3	23.3	22.6	23.6	23.9
	6H	22.8	23.8	23.2	24.1	24.4	22.8	23.8	23.2	24.1	24.4
	8H	23.0	24.0	23.4	24.3	24.6	23.0	24.0	23.4	24.3	24.6
4H	12H	23.2	24.1	23.5	24.4	24.7	23.2	24.1	23.5	24.4	24.7
	2H	20.4	21.4	20.7	21.7	22.0	20.4	21.4	20.7	21.7	22.0
	3H	22.4	23.3	22.8	23.6	24.0	22.4	23.3	22.8	23.6	24.0
	4H	23.2	24.0	23.6	24.4	24.7	23.2	24.0	23.6	24.4	24.7
	6H	23.9	24.6	24.3	25.0	25.4	23.9	24.6	24.3	25.0	25.4
8H	8H	24.2	24.8	24.6	25.2	25.6	24.2	24.8	24.6	25.2	25.6
	12H	24.4	25.0	24.8	25.4	25.8	24.4	25.0	24.8	25.4	25.8
	4H	23.5	24.2	24.0	24.6	25.0	23.5	24.2	24.0	24.6	25.0
	6H	24.4	24.9	24.8	25.3	25.8	24.4	24.9	24.8	25.3	25.8
	8H	24.7	25.2	25.2	25.6	26.1	24.7	25.2	25.2	25.6	26.1
12H	12H	25.1	25.4	25.5	25.9	26.4	25.1	25.4	25.5	25.9	26.4
	4H	23.6	24.2	24.0	24.6	25.0	23.6	24.2	24.0	24.6	25.0
	6H	24.5	24.9	24.9	25.4	25.9	24.5	24.9	24.9	25.4	25.9
8H	24.9	25.3	25.4	25.7	26.2	24.9	25.3	25.4	25.7	26.2	
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H	+0.2 / -0.4					+0.2 / -0.4					
S = 2.0H	+0.3 / -0.7					+0.3 / -0.7					
Standard table	BK06					BK06					
Correction Summand	0.5					0.5					
Corrected Glare Indices referring to 6550lm Total Luminous Flux											