




DIMENSIONS



ACCESSORIES

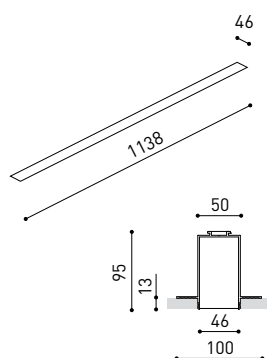

MOUNTING ACCESSORIES
(MANDATORY)

PRODUCT

Name	FIFTY H0 TRIMLESS 120 DIM DALI/PUSH 3000K W
Reference	A2990221W
Color	Matt white
RAL	9016
Category	CEILING RECESSED

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	4300 Lm
Power	30,8 W
Power values of the system	33,85 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	102°
Lighting efficiency	70%
Efficacy	140 Lm/W
Current intensity	900 mA
Dimming	DALI / Push
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	⊥
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

OTHER DATA

Ingress Protection	IP20
Diffuser included	Yes
Weight	4730 g.
Packaged weight	6150 g.
Packaging dimensions	Ø128 × 1285 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Fifty is the recessed LED profile of Arkoslight. Fifty, also available in trimless version, it's ideal for longitudinal lighting solutions, where its diffuser contributes to light up in a functional way. On the whole, this profile is capable of assuming the task of highlighting the different lines, volumes or lanes which are defined in the architecture of spaces. *** NOTE: Recommended for installations where the profile can be installed before the false plasterboard ceiling (thickness 12,5 mm).

POLAR DIAGRAM



CONICAL DIAGRAM

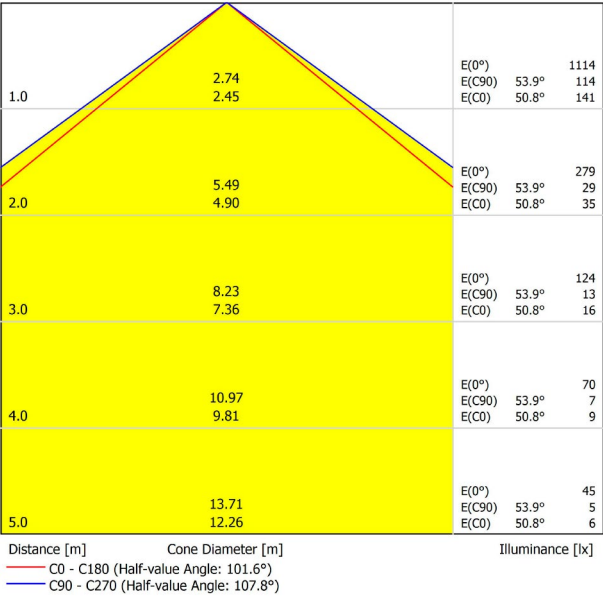

FIFTY Track Clamp Kit

A219-21-20- | B |



FIFTY Flush Ceiling Kit

A219-22-06- | B |



FIFTY Track Clamp Kit


A219-21-21- | B |



FIFTY Suspension Kit

A219-21-10- | B |

At least 2 units needed. Extra unit each 120cm. required.



COLOUR | **B** ☐ RAL 9016 |