




DIMENSIONS



AWARDS

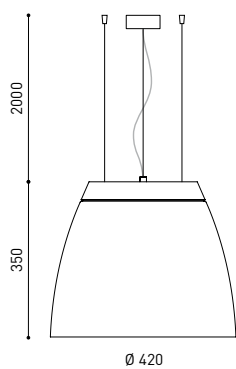


| | |
|-----------------------------|-------------------------------------|
| Name | SALT 3 2700K TW |
| Reference | A2200310TW |
| Color | Transparent-White |
| Power of the system | Transparent & 9016 |
| Category | SUSPENSION |
| LIGHTING INFORMATION | |
| Light source | LED |
| Gross luminous flux | 2800 Lm |
| Power | 22 W |
| Power values of the system | 25,88 W |
| Colour temperature | 2700 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | Mac Adam Step 2 |
| Light beam angle | 91° |
| Lighting efficiency | 84% |
| Efficacy | 127 Lm/W |
| Current intensity | 700 mA |
| Control through bluetooth | Please Consult |
| Driver | Included |
| Electrical insulation class | ⊕ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |
| OTHER DATA | |
| Ingress Protection | IP20 |
| Cord length | 2 m |
| Fast adjustment tensioner | Yes |
| Weight | 5100 g. |
| Packaged weight | 5829,4 g. |
| Packaging dimensions | 452 × 452 × 418 mm. |
| Units per package | 1 |
| Materials | Aluminium / Polymethyl Methacrylate |




High Bay light fitting performance combined with the design of a unique decorative piece. Salt integrates driver and heat dissipation into the design of the fitting itself and achieves on the one hand an excellent thermal management and on the other hand the freedom to hang the fixture at any desired height. And to prevent glare, Salt disposes of a diffuser covering the light source.

POLAR DIAGRAM

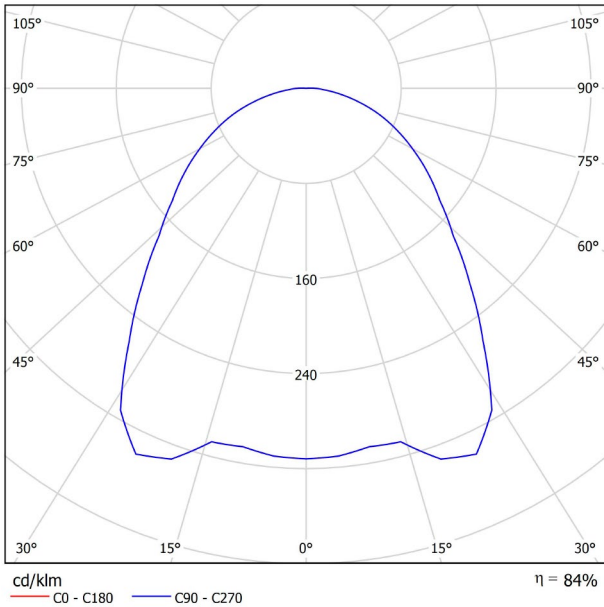

CONICAL DIAGRAM

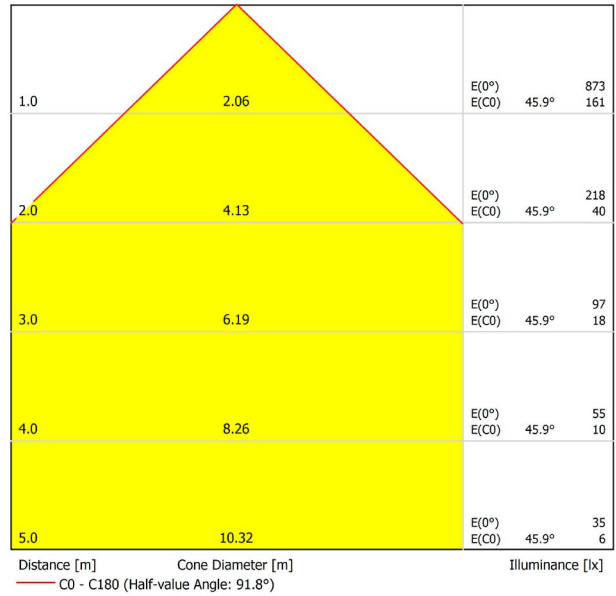

UGR

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-------------|--|------|------|------|-------------|---|------|------|------|------|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 16.8 | 18.1 | 17.1 | 18.3 | 18.5 | 16.8 | 18.1 | 17.1 | 18.3 | 18.5 |
| | 3H | 18.6 | 19.8 | 19.0 | 20.0 | 20.3 | 18.6 | 19.8 | 19.0 | 20.0 | 20.3 |
| | 4H | 19.3 | 20.4 | 19.7 | 20.7 | 21.0 | 19.3 | 20.4 | 19.7 | 20.7 | 21.0 |
| | 6H | 19.9 | 20.8 | 20.2 | 21.1 | 21.5 | 19.9 | 20.8 | 20.2 | 21.1 | 21.5 |
| | 8H | 20.1 | 21.0 | 20.4 | 21.3 | 21.6 | 20.1 | 21.0 | 20.4 | 21.3 | 21.6 |
| 4H | 12H | 20.2 | 21.1 | 20.6 | 21.4 | 21.8 | 20.2 | 21.1 | 20.6 | 21.4 | 21.8 |
| | 2H | 17.4 | 18.5 | 17.8 | 18.7 | 19.0 | 17.4 | 18.5 | 17.8 | 18.7 | 19.0 |
| | 3H | 19.4 | 20.3 | 19.8 | 20.7 | 21.0 | 19.4 | 20.3 | 19.8 | 20.7 | 21.0 |
| | 4H | 20.3 | 21.1 | 20.7 | 21.4 | 21.8 | 20.3 | 21.1 | 20.7 | 21.4 | 21.8 |
| | 6H | 21.0 | 21.6 | 21.4 | 22.0 | 22.4 | 21.0 | 21.6 | 21.4 | 22.0 | 22.4 |
| 8H | 8H | 21.2 | 21.9 | 21.7 | 22.3 | 22.7 | 21.2 | 21.9 | 21.7 | 22.3 | 22.7 |
| | 12H | 21.4 | 22.0 | 21.9 | 22.4 | 22.9 | 21.4 | 22.0 | 21.9 | 22.4 | 22.9 |
| | 4H | 20.6 | 21.2 | 21.0 | 21.6 | 22.1 | 20.6 | 21.2 | 21.0 | 21.6 | 22.1 |
| | 6H | 21.4 | 21.9 | 21.9 | 22.4 | 22.8 | 21.4 | 21.9 | 21.9 | 22.4 | 22.8 |
| | 8H | 21.8 | 22.2 | 22.3 | 22.7 | 23.2 | 21.8 | 22.2 | 22.3 | 22.7 | 23.2 |
| 12H | 12H | 22.1 | 22.5 | 22.6 | 23.0 | 23.5 | 22.1 | 22.5 | 22.6 | 23.0 | 23.5 |
| | 4H | 20.6 | 21.2 | 21.1 | 21.6 | 22.1 | 20.6 | 21.2 | 21.1 | 21.6 | 22.1 |
| | 6H | 21.5 | 22.0 | 22.0 | 22.4 | 22.9 | 21.5 | 22.0 | 22.0 | 22.4 | 22.9 |
| 8H | 21.9 | 22.3 | 22.4 | 22.8 | 23.3 | 21.9 | 22.3 | 22.4 | 22.8 | 23.3 | |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | +0.1 / -0.2 | | | | | +0.1 / -0.2 | | | | | |
| S = 1.5H | +0.2 / -0.4 | | | | | +0.2 / -0.4 | | | | | |
| S = 2.0H | +0.3 / -0.7 | | | | | +0.3 / -0.7 | | | | | |
| Standard table | BK06 | | | | | BK06 | | | | | |
| Correction Summand | 0.5 | | | | | 0.5 | | | | | |
| Corrected Glare Indices referring to 2800lm Total Luminous Flux | | | | | | | | | | | |