




DIMENSIONS



ACCESSORIES



HIGH CHROMATIC LED

AWARDS



Name	SIX L RECESSED 2 26° 3000K NT
Reference	A2872131NT
Color	Textured black
Power of the system	9005
Category	CEILING RECESSED

PRODUCT

Light source	LED
Gross luminous flux	2950 Lm
Power	24,5 W
Power values of the system	27,22 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	26°
Lighting efficiency	93%
Efficacy	120 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Emergency power supply	Please Consult
Electrical insulation class	□
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tj=85°C) >60.000h

LIGHTING INFORMATION


OTHER DATA

Ingress Protection	IP20
Recess measurements	Ø62 mm.
Swivel angle	310°
Rotation angle	350°
Weight	695 g.
Packaged weight	840 g.
Packaging dimensions	222 x 195 x 91 mm.
Units per package	1
Materials	Aluminium / Polycarbonate




Six Recessed is a spotlight for single recessed lighting solutions that stands out for its elegance and airiness. Its body; disk looking, rounded shaped, encloses an innovative combination of reflector and lens. The combined action of both, allows Six to direct light rays with the maximum uniformity in a very small distance that, at the same time, has made possible its differential design-reduced and minimalist-. In addition, Six can be freely articulated due to its airy arm which allows the spotlight to be orientated in any direction.

POLAR DIAGRAM

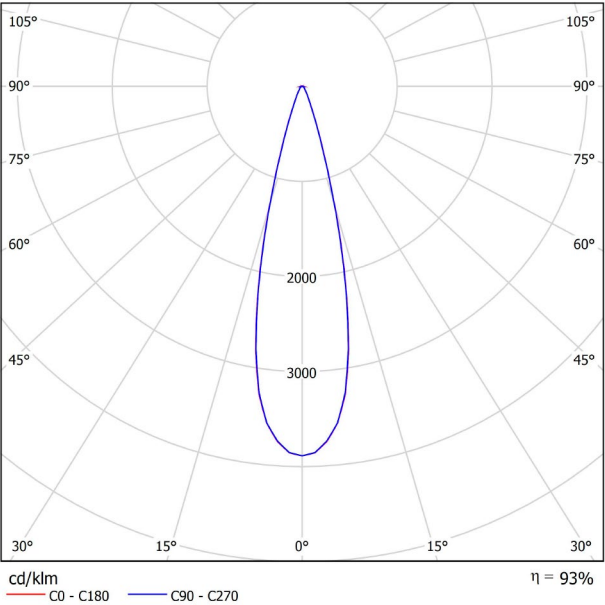

CONICAL DIAGRAM

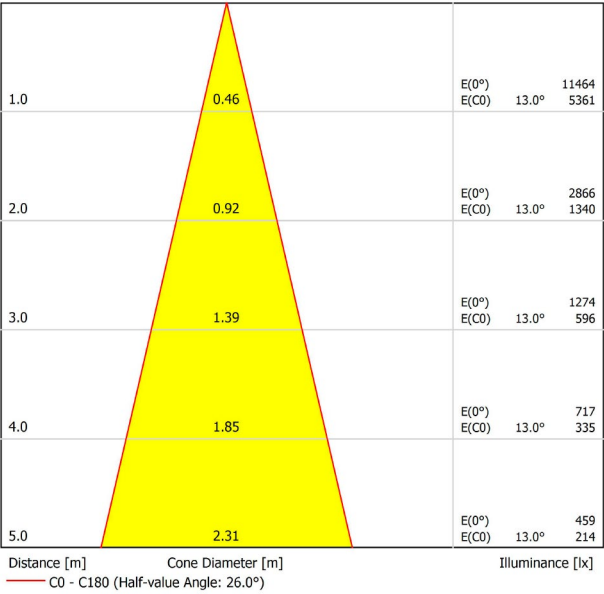

HIGH CHROMATIC LED

ARKOSLIGHT®

FOR COMMERCIAL PRODUCT SHOWCASING

Vivid Model Colour Temperature	2700K	3000K	3500K	4000K	Light Pink
 Reading			•	•	
 Fruits & Vegetables		•	•		
 Bakery	•				
 Retail		•	•		
 Cosmetics			•	•	
 Meat					•
 Fish				•	
 Seafood				•	•



For some of its products, Arkoslight offers the possibility to provide them with a special LED, designed to create an illumination focused on visually promoting goods or products for commercial purposes. It is a high chromaticity LED, capable of identifying the colour shades that produce a positive psychological perception of the illuminated object.

This special LED lighting source offers a much more attractive and intense colour range than a conventional LED, besides being much wider. Technically, this is possible thanks to a special LED setting that includes a «special saturation parameter», capable of highlighting the objects colours and materials in such a way that they seem more attractive within the visible light spectrum. To achieve this performance, in each case, the appropriate diode and specific phosphor coating are carefully selected.