




DIMENSIONS



AWARDS



Name	BLACK FOSTER SURF 1 4000K NT
Reference	A3201012NT
Color	Textured black
Power of the system	9005
Category	SURFACE

PRODUCT

BLACK FOSTER SURF 1 4000K NT

A3201012NT

Textured black

9005

SURFACE

LIGHTING INFORMATION

Light source	LED
Gross luminous flux	250 Lm
Power	2,1 W
Power values of the system	3,00 W
Colour temperature	4000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 3
Light beam angle	38°
Unified Glare Rating	UGR<19
Lighting efficiency	90%
Efficacy	119 Lm/W
Current intensity	700 mA
Control through bluetooth	Please Consult
Driver	Included
Electrical insulation class	
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A++
LED lifespan	L80B10 (Tc=85°C) >60.000h


OTHER DATA

Ingress Protection	IP20
Weight	260 g.
Packaged weight	310 g.
Packaging dimensions	254 × 93 × 70 mm.
Units per package	1
Materials	Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Surface is the product that transfers the claimed effect "The Invisible Black" to a linear system in surface application. Black Foster has a very discrete presence in the interior design due to its reduced dimensions and its extremely low glare helping the piece not to gain much prominence.

POLAR DIAGRAM

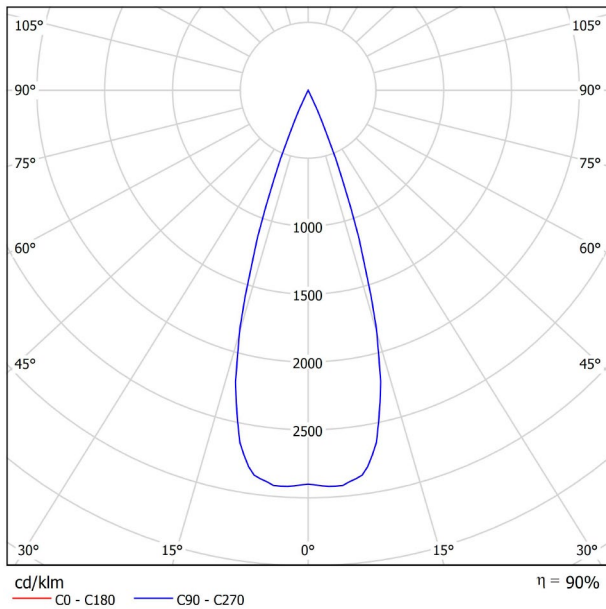

CONICAL DIAGRAM

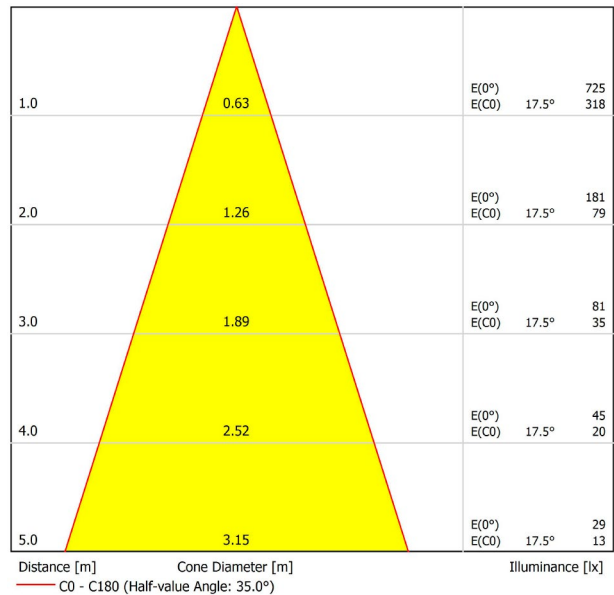

UGR

Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-5.7	-5.1	-5.5	-4.9	-4.7	-5.7	-5.1	-5.5	-4.9	-4.7	
	3H	-5.9	-5.3	-5.6	-5.1	-4.8	-5.9	-5.3	-5.6	-5.1	-4.8	
	4H	-5.9	-5.4	-5.6	-5.1	-4.9	-5.9	-5.4	-5.6	-5.1	-4.9	
	6H	-6.0	-5.5	-5.7	-5.2	-5.0	-6.0	-5.5	-5.7	-5.2	-5.0	
	8H	-6.0	-5.6	-5.7	-5.3	-5.0	-6.0	-5.6	-5.7	-5.3	-5.0	
4H	12H	-6.1	-5.6	-5.7	-5.3	-5.0	-6.1	-5.6	-5.7	-5.3	-5.0	
	2H	-5.9	-5.4	-5.6	-5.1	-4.9	-5.9	-5.4	-5.6	-5.1	-4.9	
	3H	-6.1	-5.6	-5.7	-5.3	-5.0	-6.1	-5.6	-5.7	-5.3	-5.0	
	4H	-6.2	-5.8	-5.8	-5.4	-5.1	-6.2	-5.8	-5.8	-5.4	-5.1	
	6H	-6.2	-5.9	-5.8	-5.6	-5.2	-6.2	-5.9	-5.8	-5.6	-5.2	
8H	8H	-6.3	-6.0	-5.9	-5.6	-5.2	-6.3	-6.0	-5.9	-5.6	-5.2	
	12H	-6.3	-6.1	-5.9	-5.7	-5.3	-6.3	-6.1	-5.9	-5.7	-5.3	
	4H	-6.3	-6.0	-5.9	-5.6	-5.2	-6.3	-6.0	-5.9	-5.6	-5.2	
	6H	-6.4	-6.2	-5.9	-5.7	-5.3	-6.4	-6.2	-5.9	-5.7	-5.3	
	8H	-6.4	-6.2	-5.9	-5.8	-5.3	-6.4	-6.2	-5.9	-5.8	-5.3	
12H	12H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	4H	-6.3	-6.1	-5.9	-5.7	-5.3	-6.3	-6.1	-5.9	-5.7	-5.3	
	6H	-6.4	-6.2	-5.9	-5.8	-5.3	-6.4	-6.2	-5.9	-5.8	-5.3	
	8H	-6.5	-6.3	-6.0	-5.9	-5.4	-6.5	-6.3	-6.0	-5.9	-5.4	
	Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.0 / 0.0					+0.0 / 0.0					
S = 1.5H		+0.0 / 0.0					+0.0 / 0.0					
S = 2.0H		+0.0 / 0.0					+0.0 / 0.0					
Standard table		BK00					BK00					
Correction Summand		-20.0					-20.0					
Corrected Glare Indices referring to 250lm Total Luminous Flux												