




DIMENSIONS



AWARDS



Name	BLACK FOSTER SUSP 1200 DIM ON BOARD 3000K WT
Reference	A3211051WT
Color	Textured white
Power of the system	9016
Category	SUSPENSION

PRODUCT

LIGHTING INFORMATION

LED

Gross luminous flux

2100 Lm

Power

21 W

Power values of the system

24,44 W

Colour temperature

3000 K

Colour Rendering Index

CRI>90

Chromatic stability

Mac Adam Step 3

Light beam angle

38°

Unified Glare Rating

UGR<19

Lighting efficiency

90%

Efficacy

100 Lm/W

Current intensity

700 mA

Dimming

ON BOARD

Control through bluetooth

Please Consult

Driver

Included

Electrical insulation class

□

Voltage

220 V/240 V

Frequency

50/60 Hz

Energy efficiency

A+

LED lifespan

L80B10 (Tc=85°C) >60.000h

OTHER DATA

Ingress Protection

IP20

Cord length

2 m

Fast adjustment tensioner

Yes

Weight

3400 g.

Packaged weight

4470 g.

Packaging dimensions

D145 x 1270 mm.

Units per package

1


Materials

Aluminium / Acrylonitrile Butadiene Styrene / Polycarbonate




Black Foster Suspension es la luminaria que traslada el aclamado efecto 'The Invisible Black' a un sistema lineal de suspensión. Se compone de una serie de módulos de emisión de luz dentro de un foseado metálico. Ofrece iluminación "no-glare" en aplicaciones sobre mesas y conserva la misma estética tanto encendida como apagada.

POLAR DIAGRAM

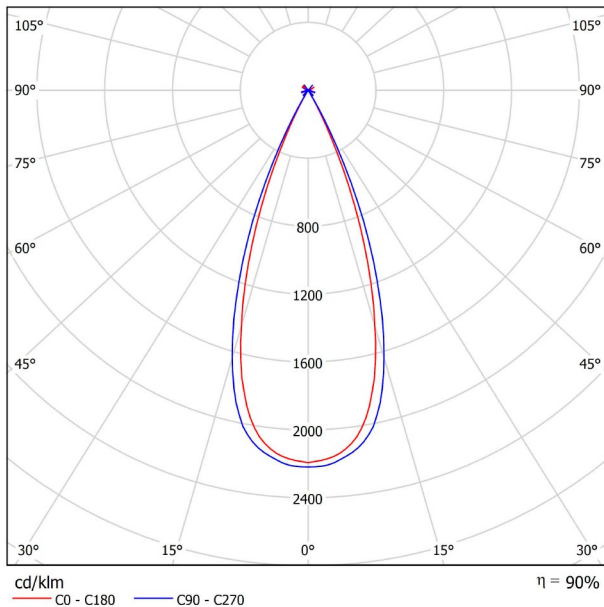

CONICAL DIAGRAM

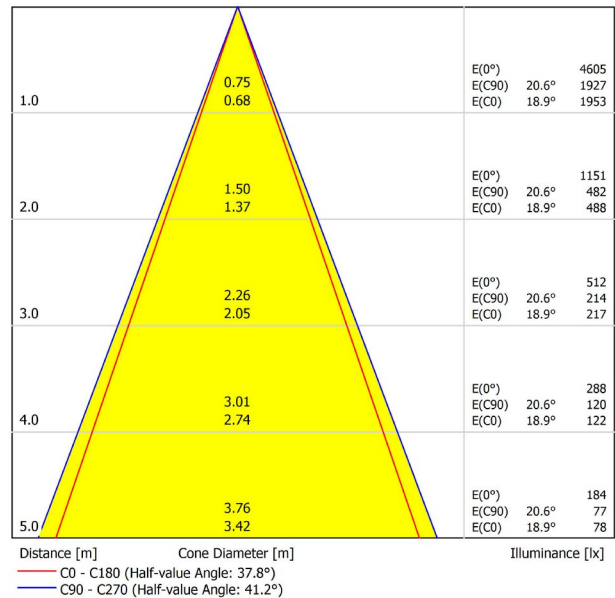

UGR

Glare Evaluation According to UGR												
ρ Ceiling		70	70	50	50	30	70	70	50	50	30	
ρ Walls		50	30	50	30	30	50	30	50	30	30	
ρ Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	-24.4	-23.8	-24.2	-23.6	-23.4	-21.4	-20.8	-21.1	-20.6	-20.4	
	3H	-12.7	-12.1	-12.4	-11.9	-11.6	-15.7	-15.1	-15.4	-14.9	-14.6	
	4H	-12.2	-11.6	-11.9	-11.4	-11.1	-14.0	-13.4	-13.7	-13.2	-12.9	
	6H	-9.1	-8.6	-8.8	-8.3	-8.1	-10.7	-10.2	-10.4	-9.9	-9.6	
	8H	-9.1	-8.6	-8.7	-8.3	-8.0	-8.7	-8.2	-8.4	-8.0	-7.7	
4H	12H	-7.7	-7.2	-7.4	-6.9	-6.6	-7.0	-6.6	-6.7	-6.3	-5.9	
	2H	-17.1	-16.6	-16.8	-16.3	-16.0	-16.6	-16.0	-16.3	-15.8	-15.5	
	3H	-12.0	-11.5	-11.7	-11.2	-10.9	-13.3	-12.8	-12.9	-12.5	-12.2	
	4H	-9.3	-8.9	-8.9	-8.6	-8.2	-12.2	-11.8	-11.9	-11.5	-11.2	
	6H	-6.8	-6.5	-6.4	-6.2	-5.8	-7.7	-7.4	-7.3	-7.0	-6.6	
8H	8H	-6.7	-6.4	-6.3	-6.1	-5.7	-6.4	-6.2	-6.0	-5.8	-5.4	
	12H	-5.6	-5.3	-5.2	-4.9	-4.5	-5.1	-4.9	-4.7	-4.5	-4.0	
	4H	-9.2	-8.9	-8.8	-8.5	-8.1	-11.4	-11.1	-11.0	-10.8	-10.4	
	6H	-5.5	-5.3	-5.0	-4.9	-4.4	-6.7	-6.5	-6.3	-6.1	-5.6	
	8H	-5.2	-5.0	-4.7	-4.6	-4.1	-5.6	-5.4	-5.1	-5.0	-4.5	
12H	12H	-4.2	-4.1	-3.7	-3.6	-3.1	-4.4	-4.2	-3.9	-3.8	-3.3	
	4H	-8.9	-8.6	-8.4	-8.2	-7.8	-10.5	-10.2	-10.0	-9.8	-9.4	
	6H	-5.3	-5.2	-4.9	-4.7	-4.3	-6.4	-6.2	-5.9	-5.8	-5.3	
	8H	-5.0	-4.9	-4.5	-4.4	-3.9	-5.3	-5.2	-4.9	-4.7	-4.3	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+2.4 / -1.3					+3.7 / -1.4					
S = 1.5H		+4.4 / -1.5					+6.0 / -1.8					
S = 2.0H		+6.3 / -4.1					+8.0 / -2.2					
Standard table		BK07					---					
Correction Summand		-24.6					---					
Corrected Glare Indices referring to 2100lm Total Luminous Flux												