




## DIMENSIONI



## ACCESSORI



ANTI-GLARE HONEYCOMB LOUVER



TRACK 48V OPTIONS

## PRODOTTO

|                    |                                  |
|--------------------|----------------------------------|
| Nome               | FIT 35 48V DIM DALI 29° 2700K NT |
| Articolo           | A3450220NT                       |
| Colore             | Nero Strutturato                 |
| Potere del sistema | 9005                             |
| Categoria          | TRACKLIGHTS                      |

## INFORMAZIONI LUCE

|                                  |                           |
|----------------------------------|---------------------------|
| Sorgente di luce                 | LED                       |
| Flusso luminoso lordo            | 590 Lm                    |
| Potenza                          | 5,5 W                     |
| Valori di potenza del sistema    | 6,18 W                    |
| Temperatura di colore            | 2700 K                    |
| Indice di Riproduzione Cromatica | CRI>90                    |
| Stabilità cromatica              | Mac Adam Step 2           |
| Angolo del fascio di luce        | 29°                       |
| Efficienza luminosa              | 80%                       |
| Efficienza                       | 107 Lm/W                  |
| Intensità di corrente            | 500 mA                    |
| Regolazione                      | DALI                      |
| Controllo con bluetooth          | Consultare                |
| Driver                           | Incluso                   |
| Classe di isolamento elettrico   | III                       |
| Tensione                         | 48 V                      |
| Frequenza                        | 0 Hz                      |
| Efficienza energetica            | A+                        |
| Ore di vita del LED              | L80B10 (Tj=85°C) >60.000h |

## ALTRI DATI

|                              |                           |
|------------------------------|---------------------------|
| Tenuta stagna                | IP20                      |
| Angolo di oscillazione       | 90°                       |
| Angolo di rotazione          | 360°                      |
| Tipo di binario              | Track 48V                 |
| Peso                         | 180 g.                    |
| Peso compresso l'imballaggio | 250 g.                    |
| Dimensioni dell'imballaggio  | 188 x 165 x 53 mm.        |
| Unità per imballaggio        | 1                         |
| Materiali                    | Alluminio / Policarbonato |



Proiettore disegnato per applicazioni su binario di basso voltaggio disponibile in cinque dimensioni (ø50, ø35, ø35 Double, ø20 y ø20 Double). Dalla geometria cilindrica e dalle forme essenziali, si distingue per minimalismo estetico e alta funzionalità, grazie alla possibilità di orientarlo in tutte le direzioni. Il perimetro in nero e l'accessorio a nido d'ape accentuano l'effetto antiabbagliante.

DIAGRAMMA DI ABBAGLIAMENTO POLARE



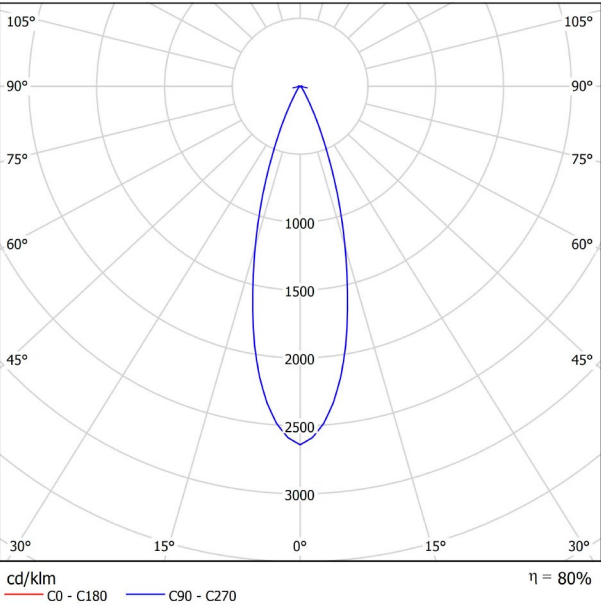


DIAGRAMMA CONICO



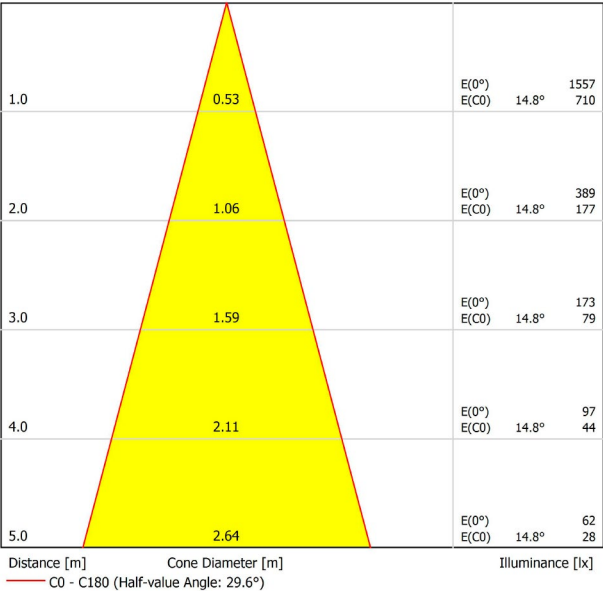

| PRODUCT                     |                             |
|-----------------------------|-----------------------------|
| Model                       | Anti-glare Honeycomb Louver |
| Reference                   | A345-00-00                  |
| Category                    | Accessories                 |
| NON SI VENDE SEPARATAMENTE. |                             |




Accessorio formato da una griglia a forma di pannello d'ape per ridurre l'abbagliamento e l'incidenza diretta dei raggi durante la visione.

# TRACK 48V TRIMLESS


**ARKOSLIGHT®**

## TRACK 48V SURFACE

Available on request. Please consult.



|                                 |                 |
|---------------------------------|-----------------|
| TRACK 48V 1M                    | A338-01-00-   N |
| TRACK 48V 2M                    | A338-02-00-   N |
| TRACK 48V 3M                    | A338-03-00-   N |
| TRACK 48V Corner 90° One Plane  | A338-04-00-   N |
| TRACK 48V Corner 90° Two Planes | A338-05-00-   N |

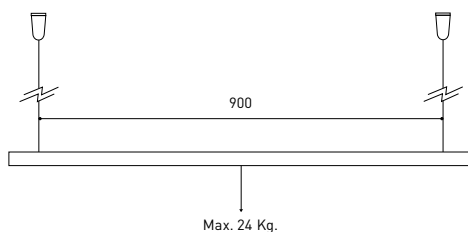

|                                      |                                                                                               |            | P    | I   | D                |
|--------------------------------------|-----------------------------------------------------------------------------------------------|------------|------|-----|------------------|
| CONSTANT VOLTAGE<br>LED POWER SUPPLY | <br>NO DIM | 0434-01-21 | 75W  | 48V | 180 x 52 x 30mm  |
|                                      |                                                                                               | 0434-01-22 | 150W | 48V | 240 x 60 x 49mm  |
|                                      | <br>DALI   | 0434-01-19 | 75W  | 48V | 235 x 100 x 31mm |
|                                      |                                                                                               | 0434-01-20 | 150W | 48V | 235 x 100 x 31mm |

## CABLE SECTION AND LENGHT BETWEEN TRACK 48V AND POWER SUPPLY

| TRACK LENGHT (m) |                     | 10 |    |    | 20 |    | 29 |
|------------------|---------------------|----|----|----|----|----|----|
| CABLE LENGHT (m) |                     | 1  | 10 | 20 | 1  | 10 | 1  |
| POWER (W)        | CABLE SECTION (mm²) |    |    |    |    |    |    |
| 75W              | 0,75mm²             | ✓  | ✓  | ✓  | ✓  | ✓  | ✓  |
|                  | 1,5mm²              | ✓  | ✓  | ✓  | ✓  | ✓  | ✓  |
| 150W             | 0,75mm²             | ✓  | X  | X  | ✓  | X  | ✓  |
|                  | 1,5mm²              | ✓  | ✓  | X  | ✓  | ✓  | ✓  |

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL  
46394 Ribarroja del Turia · Valencia (Spain)  
Tel. +34 961 667 207 · Fax +34 961 667 054  
info@arkoslight.com · www.arkoslight.com




# TRACK 48V TRIMLESS

**ARKOSLIGHT®**

## TRACK 48V SURFACE


Available on request. Please consult.

TRACK 48V 90° CORNER One Plane




\*Electrical connection included

TRACK 48V 90° CORNER Two Planes




\*Electrical connection included



TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |




TRACK 48V Short T-Bracket

A338-00-03



TRACK 48V Long T-Bracket

A338-00-04



TRACK 48V Straight Joiners (2 Units)

A338-00-05



TRACK 48V End

A338-00-06- | N |

TRACK 48V End Feed

A338-00-07- | N |

TRACK 48V Suspension Kit

A338-00-08

See accessories quantities\*

TRACK 48V Clamp for M6 ROD

A338-00-09

See accessories quantities\*

TRACK 48V Track Clamp

A338-00-10

See accessories quantities\*

### \* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs.

2000 mm - 3 Pcs.

3000 mm - 4 Pcs.

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL

46394 Ribarroja del Turia · Valencia (Spain)

Tel. +34 961 667 207 · Fax +34 961 667 054

info@arkoslight.com · www.arkoslight.com

