




## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

TRACK 48V OPTIONS

## PRODUCT

|           |                                      |
|-----------|--------------------------------------|
| Name      | FIT 35 48V SHORT DOUBLE 19° 3000K WT |
| Reference | A3451111WT-S                         |
| Color     | Textured white                       |
| RAL       | 9016                                 |
| Category  | TRACKLIGHTS                          |

## LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 2 x 630 Lm                |
| Power                       | 11 W                      |
| Power values of the system  | 11,58 W                   |
| Colour temperature          | 3000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | MacAdam Step 2            |
| Light beam angle            | 19°                       |
| Lighting efficiency         | 82%                       |
| Efficacy                    | 115 Lm/W                  |
| Current intensity           | 500 mA                    |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included                  |
| Electrical insulation class | III                       |
| Voltage                     | 48 Vdc                    |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tj=85°C) >60.000h |


## OTHER DATA

|                      |                           |
|----------------------|---------------------------|
| Ingress Protection   | IP20                      |
| Swivel angle         | 90°                       |
| Rotation angle       | 360°                      |
| Track type           | Track 48V                 |
| Weight               | 310 g.                    |
| Packaged weight      | 380 g.                    |
| Packaging dimensions | 188 x 165 x 53 mm         |
| Units per package    | 1                         |
| Materials            | Aluminium / Polycarbonate |





Fit 48V, is a spotlight for low voltage tracklight applications which is available in five sizes (ø50, ø35, ø35 double, ø20 and ø20 double). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

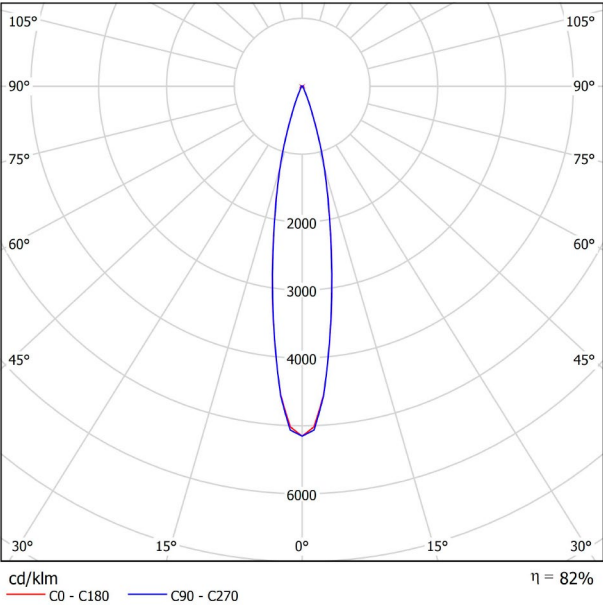

CONICAL DIAGRAM

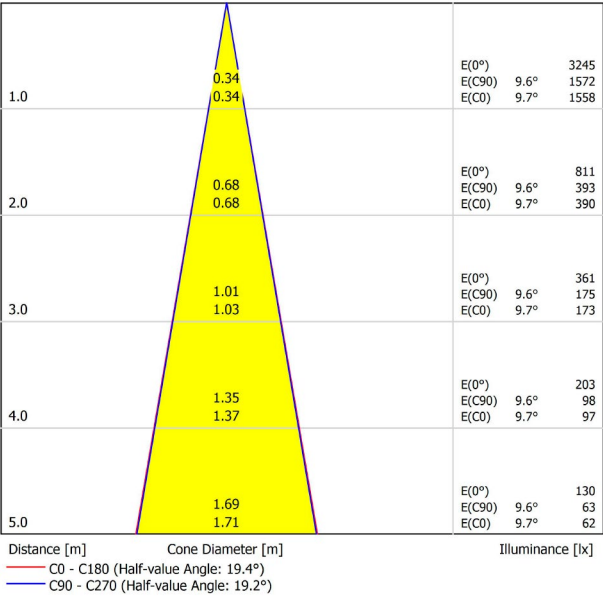




| PRODUCT              |                             |
|----------------------|-----------------------------|
| Model                | Anti-glare Honeycomb Louver |
| Reference            | A345-00-00                  |
| Category             | Accessories                 |
| NOT SOLD SEPARATELY. |                             |



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.

48V SYSTEM

# TRACK 48V




## TRACK 48V SURFACE SHORT


|                                              |             |   |
|----------------------------------------------|-------------|---|
| TRACK 48V SURFACE SHORT 1m                   | A338-21-00- | N |
| TRACK 48V SURFACE SHORT 2m                   | A338-22-00- | N |
| TRACK 48V SURFACE SHORT 3m                   | A338-23-00- | N |
| TRACK 48V SURFACE SHORT Corner 90° One Plane | A338-24-00- | N |



## TRACK 48V SURFACE SHORT Corner 90° One Plane



\*Electrical connection not included

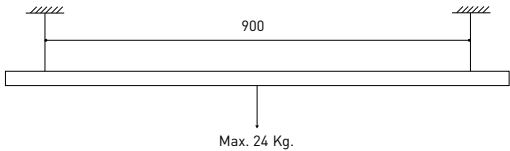

|                                      |            | P    | V   | D               |
|--------------------------------------|------------|------|-----|-----------------|
| CONSTANT VOLTAGE<br>LED POWER SUPPLY | 0434-01-21 | 75W  | 48V | 180 x 52 x 30mm |
|                                      | 0434-01-22 | 150W | 48V | 240 x 60 x 49mm |


DROP VOLTAGE TABLE

|           |                     | CABLE LENGHT (m) |    |    |    |
|-----------|---------------------|------------------|----|----|----|
|           |                     | 5                | 10 | 20 | 30 |
| POWER (W) | CABLE SECTION (mm²) | TRACK LENGHT (m) |    |    |    |
|           |                     | 50               | 50 | 30 | X  |
| 75        | 0,75                | 50               | 50 | 30 | X  |
|           | 1,5                 | 50               | 50 | 50 | 50 |
| 150       | 0,75                | 40               | 15 | X  | X  |
|           | 1,5                 | 50               | 40 | 20 | X  |

48V SYSTEM


# TRACK 48V

## ALL 48V TRACK




**TRACK 48V Live-End Connector**

A338-00-01- | N |




**TRACK 48V Central Connector**

A338-00-02- | N |



**TRACK 48V Corner 90° Connector**

A338-00-12- | N |




**TRACK 48V Wireless Control**

0434-01-31- | N | Casambi/AAG Stucchi App

0434-01-32- | N | AAG Stucchi App

## SURFACE SHORT & SUSPENSION SHORT 48V



**TRACK 48V SURFACE Straight Joiner**

A338-00-11- | N |



**TRACK 48V SURFACE SHORT End**


A338-00-18- | N |



**TRACK 48V SURFACE SHORT End Feed**

A338-00-19- | N |

## SURFACE SHORT 48V




**TRACK 48V Power Supply Case**

A338-00-20- | N |



\*To be installed aside 48V Surface Tracks  
Power supply not included

## SUSPENSION SHORT 48V



**TRACK 48V Wired Power Supply Case**

A338-00-22- | N |



A338-00-23- | N |



\*Power supply not included



**TRACK 48V SURFACE Suspension Kit (2 units)**

A338-00-15- | N |



**TRACK 48V SURFACE Suspension Feed Kit**

A338-00-16- | N |



A338-00-17- | N |



\*For remote power supply

COLOUR | N ■ |