




DIMENSIONES



ACCESORIOS

ANTI-GLARE HONEYCOMB
LOUVER

TRACK 48V OPTIONS

PRODUCTO

Nombre	FIT 35 48V DOUBLE DIM DALI 19° 2700K NT
Referencia	A3451210NT
Color	Negro Texturado
Color RAL	9005
Categoría	TRACKLIGHTS

INFORMACIÓN LUMÍNICA

Fuente de Luz	LED
Flujo Lumínico	2 x 590 Lm
Potencia	11 W
Potencia del sistema	11,76 W
Temperatura de color	2700 K
Índice de reproducción cromática	CRI>90
Estabilidad cromática	Mac Adam Step 2
Ángulo del haz de luz	19°
Eficiencia lumínica	82%
Eficacia	107 Lm/W
Intensidad de corriente	500 mA
Regulación	DALI
Control por bluetooth	Consultar
Driver	Incluido
Clase de Seguridad Eléctrica	III
Tensión	48 V
Frecuencia	0 Hz
Eficiencia Energética	A+
Horas de Vida del LED	L80B10 (Tj=85°C) >60.000h

OTROS DATOS

Estanqueidad	IP20
Ángulo de basculación	90°
Ángulo de giro	360°
Tipo de carril	Track 48V
Peso	310 g.
Peso con embalaje	380 g.
Dimensiones embalaje	188 x 165 x 53 mm.
Unidades por embalaje	1
Materiales	Aluminio / Policarbonato



Fit es un proyector para aplicaciones de carril de bajo voltaje disponible en cinco modelos (ø50, ø35, ø35 Double, ø20 y ø20 Double). De geometría cilíndrica y formas esenciales, destaca por su minimalismo estético y su funcionalidad, ya que puede orientarse en todas las direcciones. El perímetro de su boca en negro y su accesorio de lamas tipo panel de abeja acentúan su vocación antideslumbramiento.

DIAGRAMA POLAR



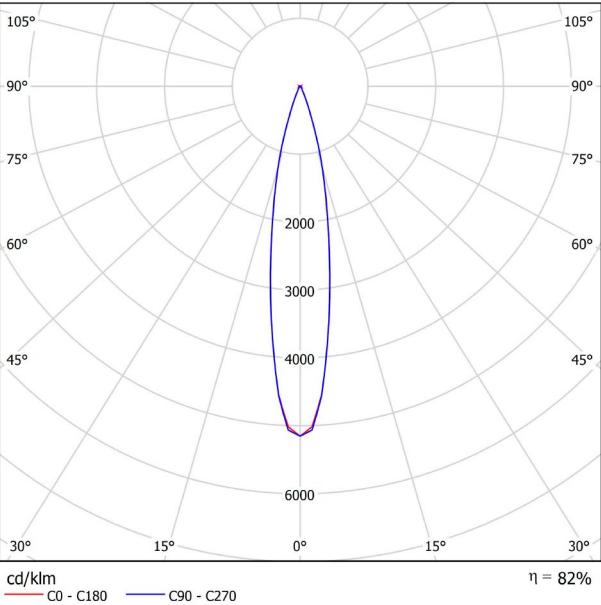


DIAGRAMA CÓNICO



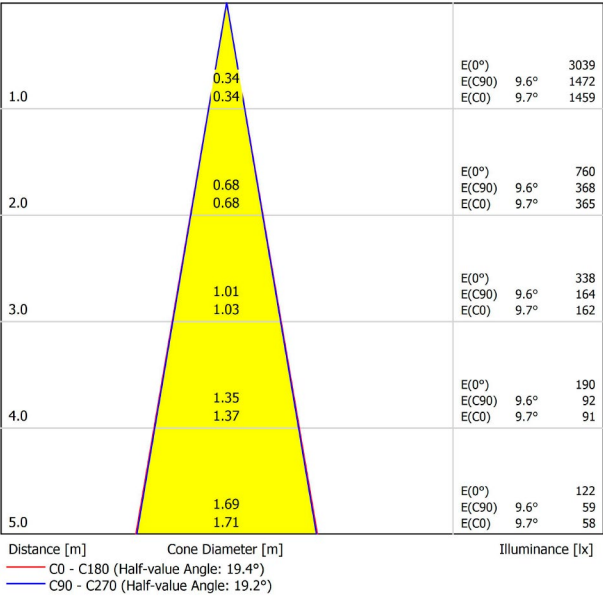

PRODUCT	
Model	Anti-glare Honeycomb Louver
Reference	A345-00-00
Category	Accessories
NO SE VENDE POR SEPARADO.	




Accesorio formado por una parrilla en forma de panel de abeja para reducir el deslumbramiento y la incidencia directa de los rayos en la visión.

TRACK 48V TRIMLESS


ARKOSLIGHT®

TRACK 48V SURFACE

Available on request. Please consult.



TRACK 48V 1M	A338-01-00- N
TRACK 48V 2M	A338-02-00- N
TRACK 48V 3M	A338-03-00- N
TRACK 48V Corner 90° One Plane	A338-04-00- N
TRACK 48V Corner 90° Two Planes	A338-05-00- N

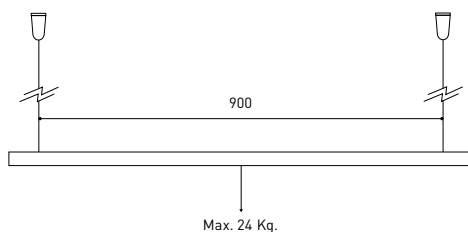

			P	I	D
CONSTANT VOLTAGE LED POWER SUPPLY	 NO DIM	0434-01-21	75W	48V	180 x 52 x 30mm
		0434-01-22	150W	48V	240 x 60 x 49mm
	 DALI	0434-01-19	75W	48V	235 x 100 x 31mm
		0434-01-20	150W	48V	235 x 100 x 31mm

CABLE SECTION AND LENGHT BETWEEN TRACK 48V AND POWER SUPPLY

TRACK LENGHT (m)		10			20		29
CABLE LENGHT (m)		1	10	20	1	10	1
POWER (W)	CABLE SECTION (mm²)						
75W	0,75mm²	✓	✓	✓	✓	✓	✓
	1,5mm²	✓	✓	✓	✓	✓	✓
150W	0,75mm²	✓	X	X	✓	X	✓
	1,5mm²	✓	✓	X	✓	✓	✓

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL
46394 Ribarroja del Turia · Valencia (Spain)
Tel. +34 961 667 207 · Fax +34 961 667 054
info@arkoslight.com · www.arkoslight.com




TRACK 48V TRIMLESS

ARKOSLIGHT®

TRACK 48V SURFACE


Available on request. Please consult.

TRACK 48V 90° CORNER One Plane




*Electrical connection included

TRACK 48V 90° CORNER Two Planes




*Electrical connection included



TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |




TRACK 48V Short T-Bracket

A338-00-03



TRACK 48V Long T-Bracket

A338-00-04



TRACK 48V Straight Joiners (2 Units)

A338-00-05



TRACK 48V End

A338-00-06- | N |

TRACK 48V End Feed

A338-00-07- | N |

TRACK 48V Suspension Kit

A338-00-08

See accessories quantities*

TRACK 48V Clamp for M6 ROD

A338-00-09

See accessories quantities*

TRACK 48V Track Clamp

A338-00-10

See accessories quantities*

*** SUGGESTED MOUNTING ACCESSORIES QUANTITIES**

1000 mm - 2 Pcs.

2000 mm - 3 Pcs.

3000 mm - 4 Pcs.

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL

46394 Ribarroja del Turia · Valencia (Spain)

Tel. +34 961 667 207 · Fax +34 961 667 054

info@arkoslight.com · www.arkoslight.com

5Year
GUARANTEE*