




## DIMENSIONES



## ACCESORIOS



ANTI-GLARE HONEYCOMB LOUVER



TRACK 48V OPTIONS

## PRODUCTO

|            |                                         |
|------------|-----------------------------------------|
| Nombre     | FIT 35 48V DOUBLE DIM DALI 29° 3000K WT |
| Referencia | A3451221WT                              |
| Color      | Blanco Texturado                        |
| Color RAL  | 9016                                    |
| Categoría  | TRACKLIGHTS                             |

## INFORMACIÓN LUMÍNICA

|                                  |                           |
|----------------------------------|---------------------------|
| Fuente de Luz                    | LED                       |
| Flujo Lumínico                   | 2 x 630 Lm                |
| Potencia                         | 11 W                      |
| Potencia del sistema             | 11,76 W                   |
| Temperatura de color             | 3000 K                    |
| Índice de reproducción cromática | CRI>90                    |
| Estabilidad cromática            | Mac Adam Step 2           |
| Ángulo del haz de luz            | 29°                       |
| Eficiencia lumínica              | 80%                       |
| Eficacia                         | 115 Lm/W                  |
| Intensidad de corriente          | 500 mA                    |
| Regulación                       | DALI                      |
| Control por bluetooth            | Consultar                 |
| Driver                           | Incluido                  |
| Clase de Seguridad Eléctrica     | III                       |
| Tensión                          | 48 V                      |
| Frecuencia                       | 0 Hz                      |
| Eficiencia Energética            | A+                        |
| Horas de Vida del LED            | L80B10 (Tj=85°C) >60.000h |

## OTROS DATOS

|                       |                          |
|-----------------------|--------------------------|
| Estanqueidad          | IP20                     |
| Ángulo de basculación | 90°                      |
| Ángulo de giro        | 360°                     |
| Tipo de carril        | Track 48V                |
| Peso                  | 310 g.                   |
| Peso con embalaje     | 380 g.                   |
| Dimensiones embalaje  | 188 x 165 x 53 mm.       |
| Unidades por embalaje | 1                        |
| Materiales            | Aluminio / Policarbonato |



Fit es un proyector para aplicaciones de carril de bajo voltaje disponible en cinco modelos (ø50, ø35, ø35 Double, ø20 y ø20 Double). De geometría cilíndrica y formas esenciales, destaca por su minimalismo estético y su funcionalidad, ya que puede orientarse en todas las direcciones. El perímetro de su boca en negro y su accesorio de lamas tipo panel de abeja acentúan su vocación antideslumbramiento.

DIAGRAMA POLAR



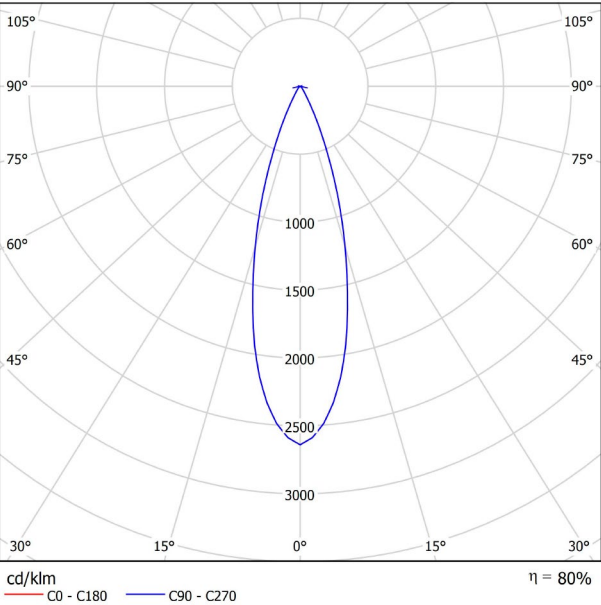


DIAGRAMA CÓNICO



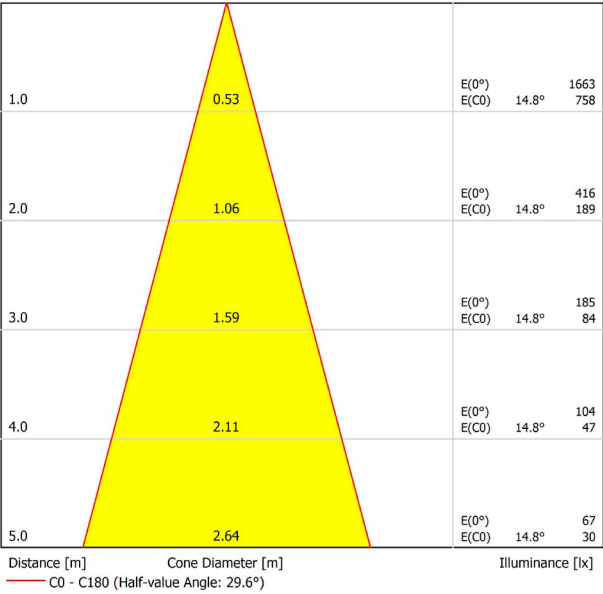

| PRODUCT                   |                             |
|---------------------------|-----------------------------|
| Model                     | Anti-glare Honeycomb Louver |
| Reference                 | A345-00-00                  |
| Category                  | Accessories                 |
| NO SE VENDE POR SEPARADO. |                             |




Accesorio formado por una parrilla en forma de panel de abeja para reducir el deslumbramiento y la incidencia directa de los rayos en la visión.

# TRACK 48V TRIMLESS


**ARKOSLIGHT®**

## TRACK 48V SURFACE

Available on request. Please consult.



|                                 |                 |
|---------------------------------|-----------------|
| TRACK 48V 1M                    | A338-01-00-   N |
| TRACK 48V 2M                    | A338-02-00-   N |
| TRACK 48V 3M                    | A338-03-00-   N |
| TRACK 48V Corner 90° One Plane  | A338-04-00-   N |
| TRACK 48V Corner 90° Two Planes | A338-05-00-   N |

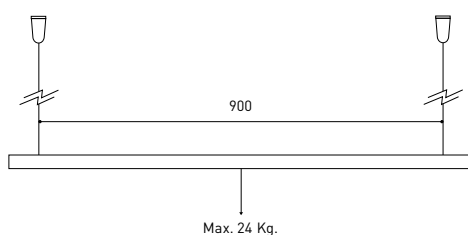

|                                      |                                                                                               |            | P    | I   | D                |
|--------------------------------------|-----------------------------------------------------------------------------------------------|------------|------|-----|------------------|
| CONSTANT VOLTAGE<br>LED POWER SUPPLY | <br>NO DIM | 0434-01-21 | 75W  | 48V | 180 x 52 x 30mm  |
|                                      |                                                                                               | 0434-01-22 | 150W | 48V | 240 x 60 x 49mm  |
|                                      | <br>DALI   | 0434-01-19 | 75W  | 48V | 235 x 100 x 31mm |
|                                      |                                                                                               | 0434-01-20 | 150W | 48V | 235 x 100 x 31mm |

## CABLE SECTION AND LENGHT BETWEEN TRACK 48V AND POWER SUPPLY

| TRACK LENGHT (m) |                     | 10 |    |    | 20 |    | 29 |
|------------------|---------------------|----|----|----|----|----|----|
| CABLE LENGHT (m) |                     | 1  | 10 | 20 | 1  | 10 | 1  |
| POWER (W)        | CABLE SECTION (mm²) |    |    |    |    |    |    |
| 75W              | 0,75mm²             | ✓  | ✓  | ✓  | ✓  | ✓  | ✓  |
|                  | 1,5mm²              | ✓  | ✓  | ✓  | ✓  | ✓  | ✓  |
| 150W             | 0,75mm²             | ✓  | X  | X  | ✓  | X  | ✓  |
|                  | 1,5mm²              | ✓  | ✓  | X  | ✓  | ✓  | ✓  |

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL  
46394 Ribarroja del Turia · Valencia (Spain)  
Tel. +34 961 667 207 · Fax +34 961 667 054  
info@arkoslight.com · www.arkoslight.com




# TRACK 48V TRIMLESS

**ARKOSLIGHT®**

## TRACK 48V SURFACE


Available on request. Please consult.

TRACK 48V 90° CORNER One Plane




\*Electrical connection included

TRACK 48V 90° CORNER Two Planes




\*Electrical connection included



TRACK 48V Live-End Connector

A338-00-01- | N |




TRACK 48V Central Connector

A338-00-02- | N |




TRACK 48V Short T-Bracket

A338-00-03



TRACK 48V Long T-Bracket

A338-00-04



TRACK 48V Straight Joiners (2 Units)

A338-00-05



TRACK 48V End

A338-00-06- | N |

TRACK 48V End Feed

A338-00-07- | N |

TRACK 48V Suspension Kit

A338-00-08

See accessories quantities\*

TRACK 48V Clamp for M6 ROD

A338-00-09

See accessories quantities\*

TRACK 48V Track Clamp

A338-00-10

See accessories quantities\*

### \* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000 mm - 2 Pcs.

2000 mm - 3 Pcs.

3000 mm - 4 Pcs.

COLOUR | N ■ RAL 9005 |

Recommended for installations where the profile can be installed before the false plasteboard ceiling (thickness 12,5mm.)

Calle N · Pol. Ind. EL OLIVERAL

46394 Ribarroja del Turia · Valencia (Spain)

Tel. +34 961 667 207 · Fax +34 961 667 054

info@arkoslight.com · www.arkoslight.com

