




## DIMENSIONS



## ACCESSORIES

ANTI-GLARE HONEYCOMB  
LOUVER

TRACK 3L OPTIONS

## PRODUCT

|                     |                     |
|---------------------|---------------------|
| Name                | FIT 65 36° 4000K NT |
| Reference           | A3560132NT          |
| Color               | Textured black      |
| Power of the system | 9005                |
| Category            | TRACKLIGHTS         |

## LIGHTING INFORMATION

|                             |                           |
|-----------------------------|---------------------------|
| Light source                | LED                       |
| Gross luminous flux         | 1320 Lm                   |
| Power                       | 10,3 W                    |
| Power values of the system  | 12,12 W                   |
| Colour temperature          | 4000 K                    |
| Colour Rendering Index      | CRI>90                    |
| Chromatic stability         | Mac Adam Step 2           |
| Light beam angle            | 36°                       |
| Lighting efficiency         | 84%                       |
| Efficacy                    | 128 Lm/W                  |
| Current intensity           | 300 mA                    |
| Control through bluetooth   | Please Consult            |
| Driver                      | Included                  |
| Electrical insulation class | ⏏                         |
| Voltage                     | 220 V/240 V               |
| Frequency                   | 50/60 Hz                  |
| Energy efficiency           | A+                        |
| LED lifespan                | L80B10 (Tj=85°C) >60.000h |


## OTHER DATA

|                      |                           |
|----------------------|---------------------------|
| Ingress Protection   | IP20                      |
| Swivel angle         | 90°                       |
| Rotation angle       | 360°                      |
| Track type           | Track 3L+N                |
| Weight               | 610 g.                    |
| Packaged weight      | 740 g.                    |
| Packaging dimensions | 325 x 135 x 96 mm.        |
| Units per package    | 1                         |
| Materials            | Aluminium / Polycarbonate |





Fit, is a spotlight for triphasic track applications available in two versions (ø80 and ø65). Cylindrical geometry and essential forms, it stands out for its minimalistic looking and its functionality as it can be orientated in any direction. The black perimeter around its mouth and its honeycomb accessory, highlights its anti-glare vocation.

POLAR DIAGRAM

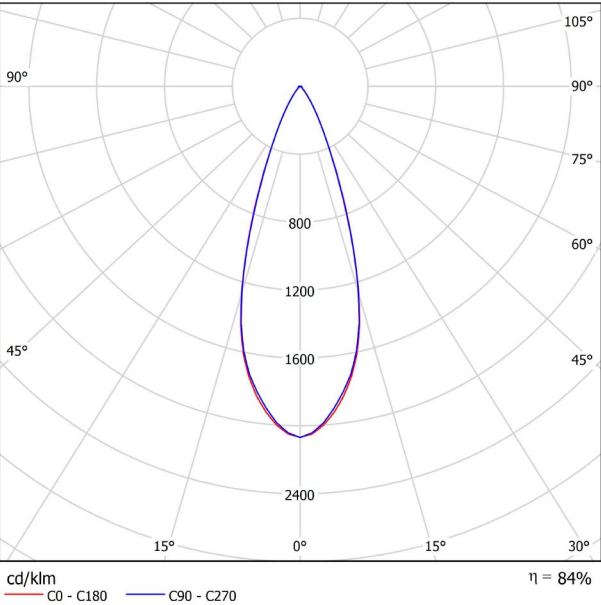

CONICAL DIAGRAM

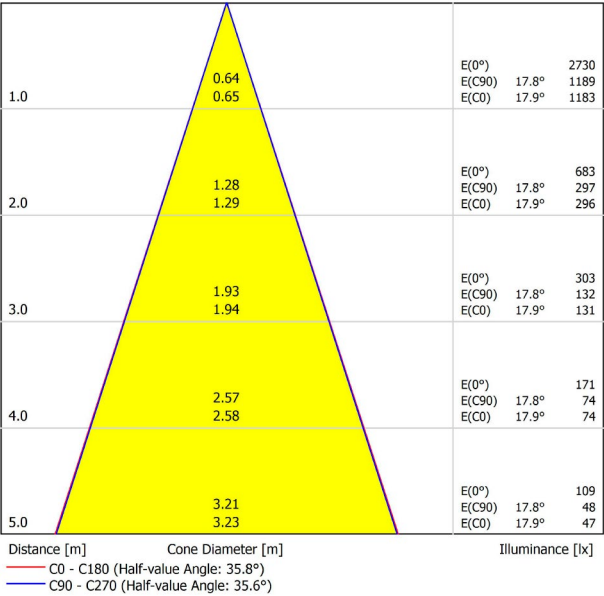




| PRODUCT   |                             |
|-----------|-----------------------------|
| Model     | Anti-glare Honeycomb Louver |
| Reference | A356-00-00                  |
| Category  | Accessories                 |

NOT SOLD SEPARATELY.



Accessory made up of louver in the shape of a honeycomb panel to reduce glare and the effects of direct rays of vision.


## TRACK 3L+N SURFACE & SUSPENDED



|             |             |   |   |
|-------------|-------------|---|---|
| TRACK 3L 1m | A282-01-00- | B | N |
| TRACK 3L 2m | A282-02-00- | B | N |
| TRACK 3L 3m | A282-03-00- | B | N |



## TRACK 3L+N FLUSH MOUNTING\*



|                   |             |   |   |
|-------------------|-------------|---|---|
| TRACK 3L FLUSH 1m | A282-11-00- | B | N |
| TRACK 3L FLUSH 2m | A282-12-00- | B | N |
| TRACK 3L FLUSH 3m | A282-13-00- | B | N |



## WEIGHT BEAR CAPACITY


Distancia de fijación y capacidad de carga.  
Distancia fijación recomendada l~ 1000 mm.

Fastening distance and loading capacity.  
Recommended fastening distance l~ 1000 mm.

Distance de fixation et capacité de charge.  
Distance de fixation recommandée l~ 1000 mm.

Distanza di installazione e capacità di carico.  
Distanza consigliata di fissazione l~ 1000 mm.

Befestigungsabstand und Belastbarkeit.  
Empfohlener Abstand l~ 1000 mm.

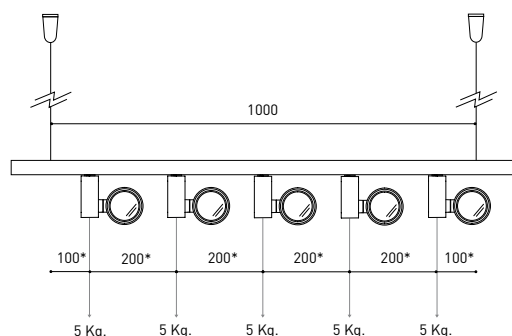


\*minimum distance (mm.)

## ACCESSORIES

FIT MODEL: ACCESSORIES ONLY IN BLACK FINISH  
SIX MODEL: ACCESSORIES NOT AVAILABLE


### TRACKLIGHT Surface Adapter

|             |   |
|-------------|---|
| 0000-55-43- | W |
| 0000-55-39- | N |



### TRACKLIGHT Recessed Adapter

|             |   |
|-------------|---|
| 0000-55-44- | W |
| 0000-55-40- | N |




COLOUR | B ☐ RAL 9016 | N ☒ RAL 9005 |

Calle N · Pol. Ind. EL OLIVERAL  
46394 Ribarroja del Turia · Valencia (Spain)  
Tel. +34 961 667 207 · Fax +34 961 667 054  
info@arkoslight.com · www.arkoslight.com



## SURFACE & SUSPENDED




POLARITY  
GROOVE

### TRACK 3L Live-End Connector

A282-00-01- | B | N |

A282-00-02- | B | N |




### TRACK 3L Central Connector

A282-00-03- | B | N |




### TRACK 3L Ceiling Kit

A219-21-06- | B | N |



### TRACK 3L Universal Angle


A282-00-15- | B | N |



### TRACK 3L 90° Angle

A282-00-06- | B | N |


A282-00-07- | B | N |



### TRACK 3L T Joint

A282-00-16- | B | N |

A282-00-17- | B | N |



### TRACK 3L Mechanical Joint

A219-21-11- | B | N |




### TRACK 3L Suspension Kit

A219-21-10- | B | N |

At least 2 units needed

## FLUSH MOUNTING



POLARITY  
GROOVE

### TRACK 3L Live-End Connector


A282-00-01- | B | N |

A282-00-02- | B | N |

### TRACK 3L FLUSH Cover Plate

A282-10-19- | B | N |

Mandatory for installation



### TRACK 3L Central Connector

A282-00-03- | B | N |

### TRACK 3L FLUSH Cover Plate


A282-10-19- | B | N |

Mandatory for installation



### TRACK 3L FLUSH Ceiling Kit

A219-22-06- | B |



### TRACK 3L 90° Angle


A282-00-06- | B | N |

A282-00-07- | B | N |

### TRACK 3L FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation



### TRACK 3L T Joint

A282-00-16- | B | N |


A282-00-17- | B | N |

### TRACK 3L FLUSH Corner Cover Plate

A282-10-20- | B | N |

Mandatory for installation

## SURFACE & SUSP. / FLUSH MOUNTING




### TRACK Contact Joint

A282-00-04- | B | N |



### TRACK End

A219-20-02- | B | N |



### TRACK Bending Tool

A282-00-00

For tracks its length has been modified

COLOUR | B □ RAL 9016 | N ■ RAL 9005 |