


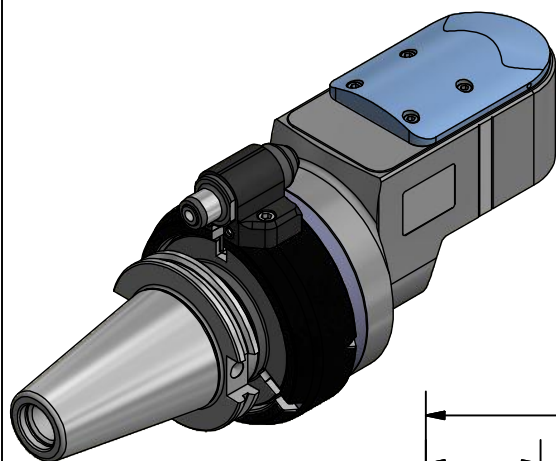
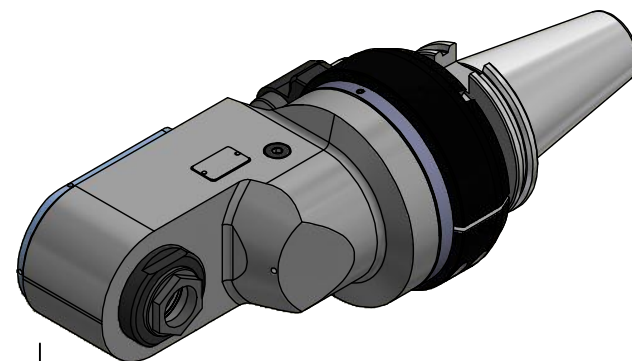
4

3

2

1

Universal Stop Block

Coolant Supply Through Spindle  
Do Not Operate Dry

C

10.63

1.36


.51

.81

18MM PIN

Output Spindle Alignment Surface

3.150 H=80

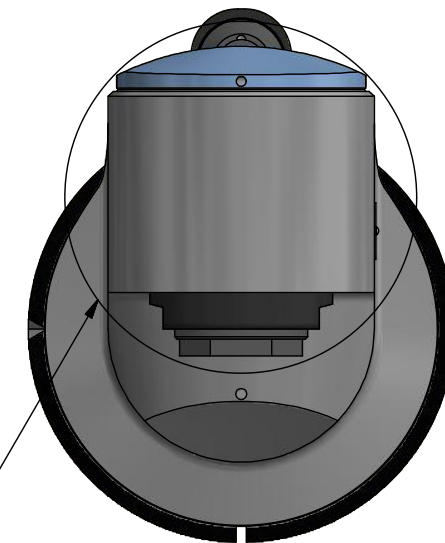
ER 32 Output Spindle  
Direction Opposite Spindle  
Max RPM 3500  
1:1

2.32

9.06

B

A

105 (4.13) Min. Clearance Circle  
Not Including Cutting Tool

ITEMS SHOWN ON THIS DOCUMENT CONTAIN PROPRIETARY INFORMATION OF PARLEC INC. AND IS SUBJECT TO BEING RETURNED UPON REQUEST. IT SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF PARLEC INC. ANY AUTHORIZED REPRODUCTION MUST BEAR THIS ENTIRE LEGEND.

PART  
NUMBER

9.FR9.200C0-2C50

**PARLEC**  
 (800) TOOL USA

 WORLD HEADQUARTERS  
 101 PERINTON PARKWAY  
 FAIRPORT, NEW YORK 14450
