





4

3

2

1

Universal Stop Block

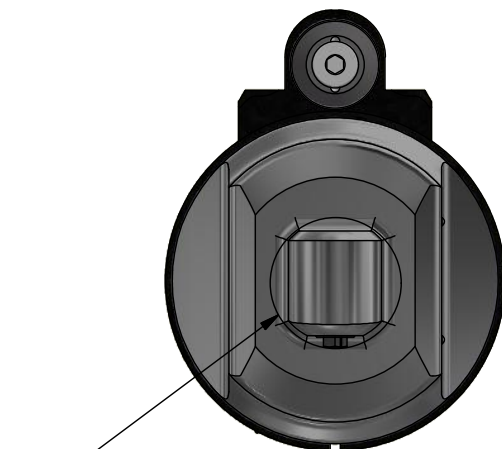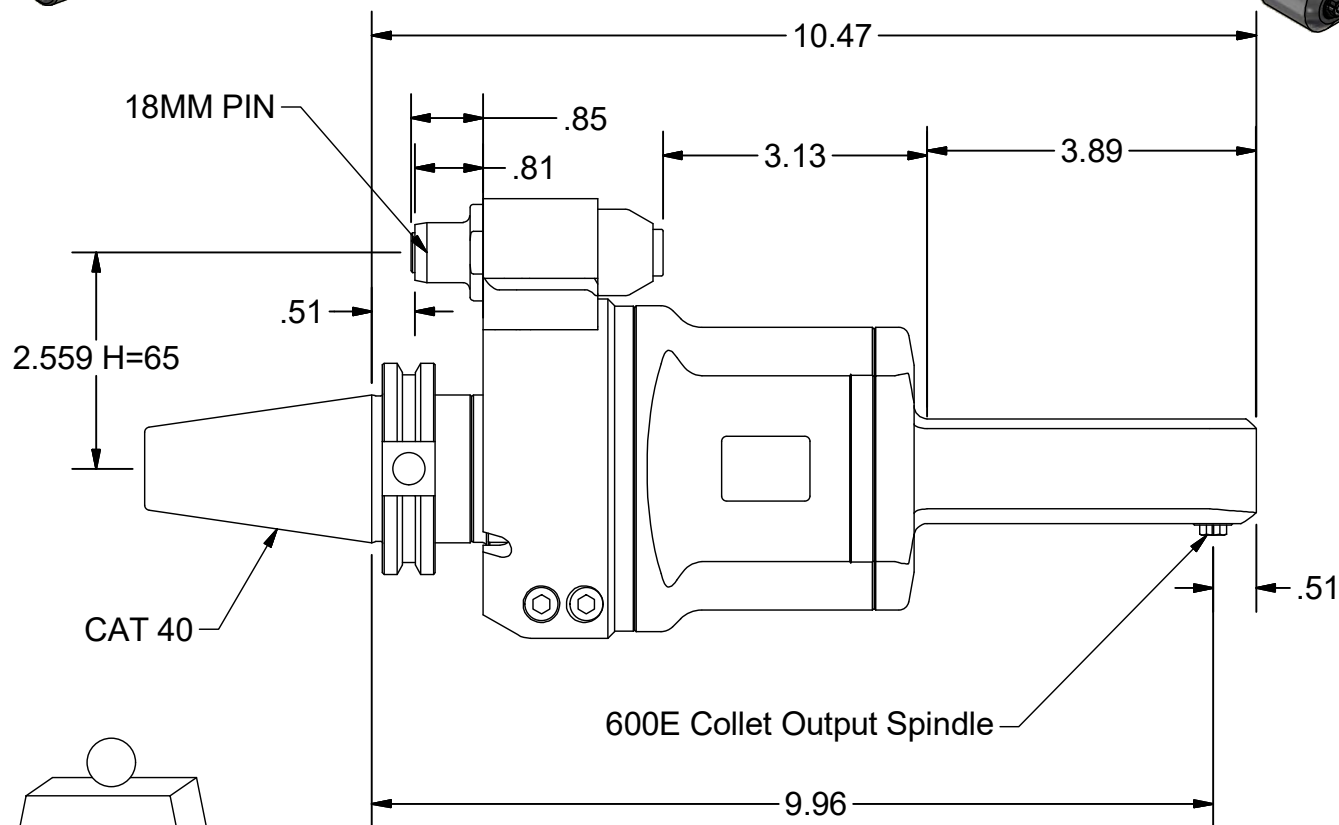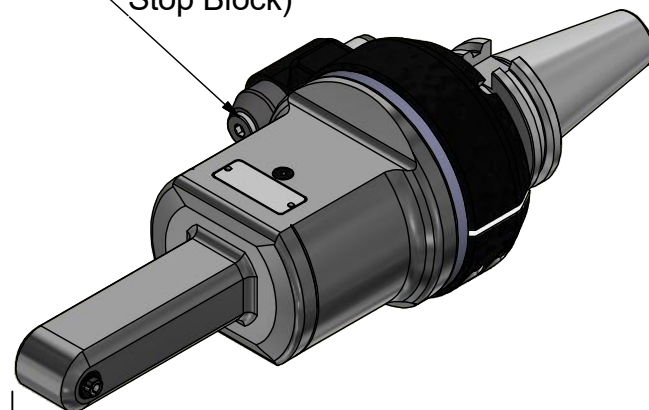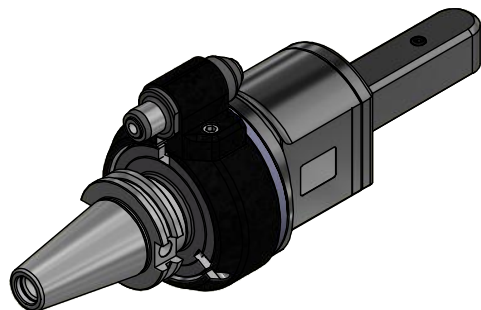Pipe Thread for  
CoolantCoolant Output  
(Standard Through  
Stop Block)39 [1.54"] Min. Clearance Circle  
Not including cutting tool14.9 lb  
6.8 kgPART  
NUMBER

9.FS9.04L00-1C40

ITEMS SHOWN ON THIS DOCUMENT CONTAIN PROPRIETARY INFORMATION OF PARLEC INC. AND IS SUBJECT TO BEING RETURNED UPON REQUEST. IT SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF PARLEC INC. ANY AUTHORIZED REPRODUCTION MUST BEAR THIS ENTIRE LEGEND.

**PARLEC**  
(800) TOOL USA

WORLD HEADQUARTERS  
101 PERINTON PARKWAY  
FAIRPORT, NEW YORK 14450







4

3

2

1

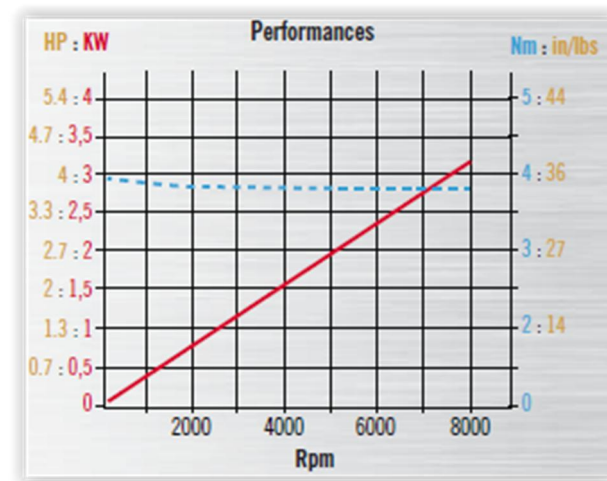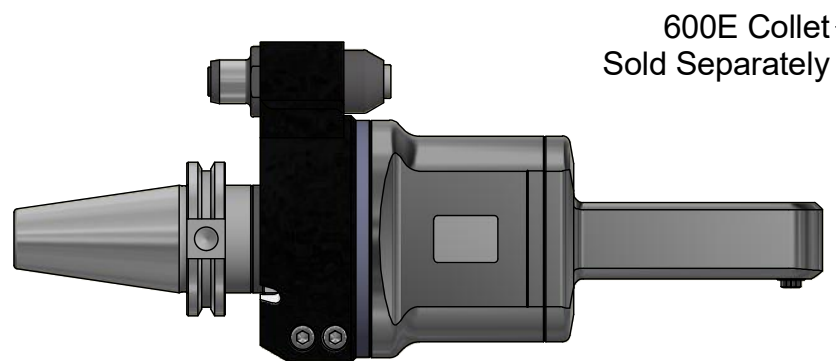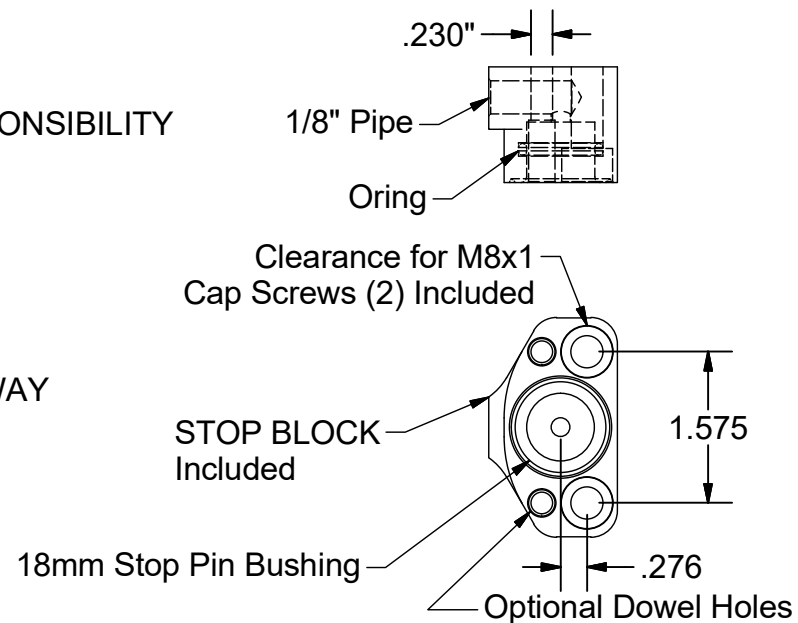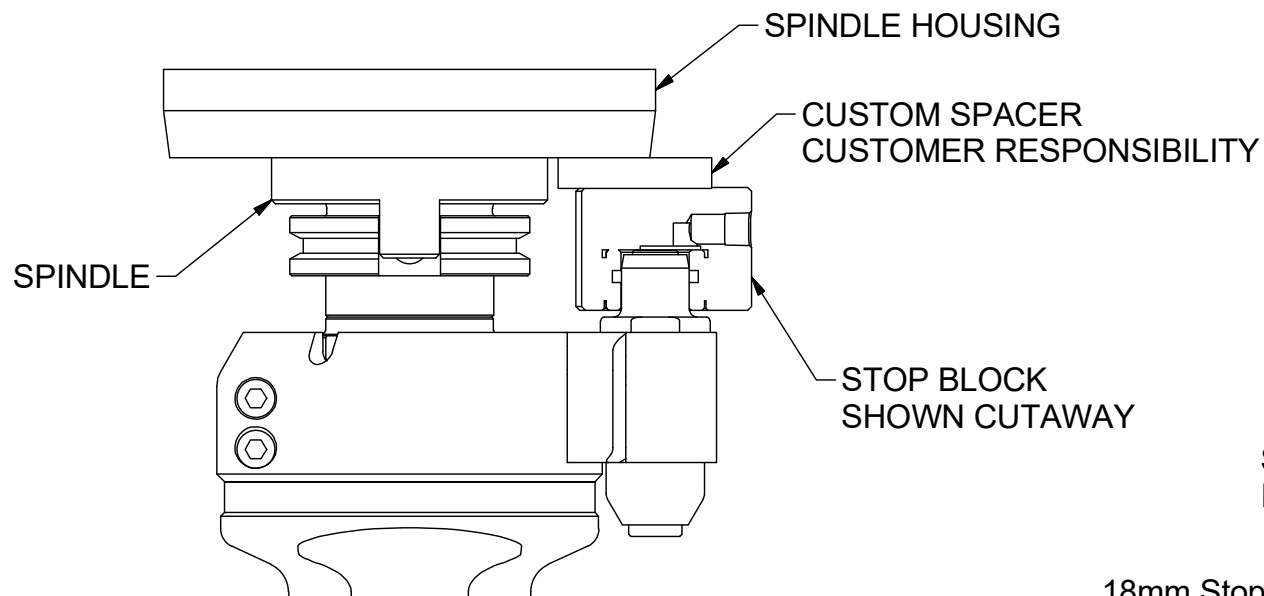

#### APPLICATION SPECIFICATION:

OUTPUT SHAFT; 600E COLLET  
AXIAL LOAD MAX 27LBS. (120N)  
COOLANT THROUGH PIN

RANGE 1-4MM RATIO 1:1 RPM 8,000  
TORQUE 31 in/lbs (3.5Nm)  
DIRECTION OPPOSITE

PART  
NUMBER

9.FS9.04L00-1C40

ITEMS SHOWN ON THIS DOCUMENT CONTAIN PROPRIETARY INFORMATION OF PARLEC INC. AND IS SUBJECT TO BEING RETURNED UPON REQUEST. IT SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN PERMISSION OF PARLEC INC. ANY AUTHORIZED REPRODUCTION MUST BEAR THIS ENTIRE LEGEND.

**PARLEC**  
(800) TOOL USA  
WORLD HEADQUARTERS  
101 PERINTON PARKWAY  
FAIRPORT, NEW YORK 14450