


TECHNICAL SPECIFICATIONS	
<b>EQUIPMENT TYPE</b>	Conservator - Automatic Defrost - Variable Speed
<b>INTERNAL DIMENSIONS</b>	
<b>HEIGHT</b>	615 mm
<b>DEPTH</b>	720 mm
<b>WIDTH</b>	1560 mm
<b>INFO</b>	
<b>LID/DOOR TYPE</b>	Lid - Glass
<b>TOTAL DISPLAY AREA</b>	0,97 m <sup>2</sup>
<b>INTERNAL COATING</b>	Plastified Metal Sheet
<b>CLIMATE CLASS</b>	3L1
<b>FREEZING CAPACITY</b>	N.A.
<b>TEMPERATURE RANGE</b>	AMBIENT 16   61 / 30   86 °C / °F INNER* -24 °C / -16 °C -11,2 °F / 3,2 °F
<b>VOLUME GROSS   NET</b>	615L (21,7 ft <sup>3</sup> )   446L (15,8 ft <sup>3</sup> )
<b>EXTERNAL DIMENSIONS</b>	
<b>HEIGHT</b>	840 mm
<b>DEPTH</b>	885 mm
<b>WIDTH</b>	1700 mm

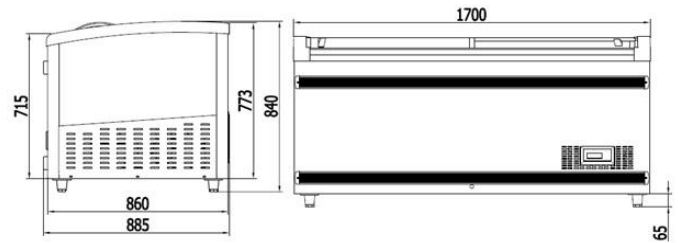

ENERGETIC FEATURES	
<b>VOLTAGE/ FREQUENCY</b>	220-240V / 50-60Hz
<b>NOMINAL CURRENT</b>	1,79 A
<b>POWER</b>	241 W
<b>CONSUMPTION</b>	3,88 kWh/24hr
<b>ENERGY EFFICIENCY</b>	C
<b>NOISE LEVEL</b>	<55 dB
<b>ACCESSORIES</b>	
<b>BASKETS</b>	0
<b>DIVIDER</b>	2
<b>SHELVES</b>	3
<b>WATER DRAIN</b>	Yes
<b>THERMOMETER</b>	Yes - Digital
<b>LOCK</b>	No

Approved by: Rui Ribeiro

27/06/2024

This leaflet is merely informative, subject to changes in technical data and typographical errors, and may not be used as a contractual document.

\*Temperature on steady state, at the load line, with empty and closed equipment, at the correspondent climatic class ambient conditions.

©All Rights Reserved

Document uncontrolled after issuance

COMPONENTS	
<b>COMPRESSOR</b>	Embraco
<b>CONDENSER</b>	Ventilated
<b>THERMOSTAT</b>	Carel - Digital
<b>REFRIGERANT</b>	R290
<b>EVAPORATOR</b>	Hidden
<b>LIGHT</b>	LED

PACKING LIST	
<b>PACKING DIMENSIONS</b>	
<b>HEIGHT</b>	855 mm
<b>DEPTH</b>	990 mm
<b>WIDTH</b>	1790 mm
<b>WEIGHT</b>	
<b>EQUIPAMENT</b>	125 kg
<b>EQUIPAMENT + PACKGING</b>	128 kg

EXPEDITION				
<b>CAPACITY</b>	<b>20' DC</b>	<b>40' HC</b>	<b>45' HC</b>	<b>TRUCK 13,6</b>
	12	39	45	45