



EL 71

FEATURES

- Solid lift up lids
- Thermometer
- Feet
- Lock
- Baskets
- Options:
 - Dividers
 - Graphics (minimum quantity required)
 - Castors
 - Castors with brake

| EL |

ICE CREAM FREEZER FOR DIRECT SALES



EL 22



EL 35




EL 45



EL 53



EL 61

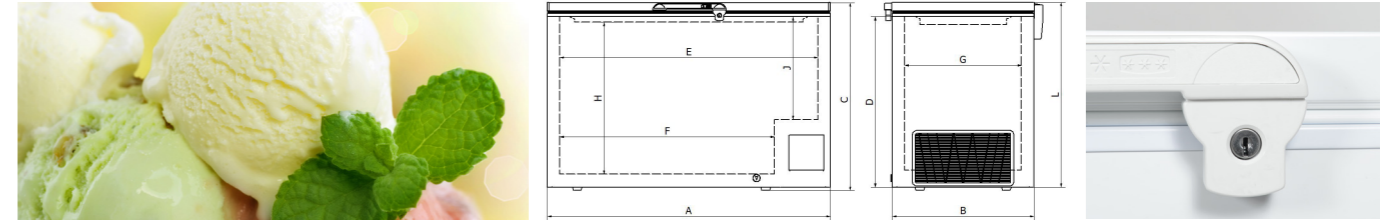

	EL 22	EL 35	EL 45	EL 53	EL 61	EL 71
CLIMATE CLASS	B	B	B	B	B	B
VOLUME						
Gross volume, litres	200	323	416	491	566	691
Net volume, litres	177	279	361	426	492	564
TEMPERATURE						
Ambient temperature range	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Temperature range inside unit	-16 to -23	-16 to -23	-16 to -23	-16 to -23	-16 to -23	-16 to -23
COOLING DATA						
Refrigerant	R600	R600	R600	R600	R600	R600
Refrigerant amount, gram	60	80	85	108	110	115
Type of cooling	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual
ENERGY						
Energy consumption / 24h kwh at 30 deg. C	0,942	1,321	1,600	1,940	2,022	3,197
AE- Annual Enrgy consumption , kwh	344	482	584	708	738	1167
EEL- Energy Efficiency Index	25,8%	28,6%	29,8%	32,4%	30,6%	43,9%
EC-Energy Class	C	C	C	C	C	D
ELECTRICAL DATA						
Power	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz	220-240 v / 50 Hz
Power 110 volt / 60 hz	Optional	Optional	Optional	Optional	Optional	Optional
Current consumption (amperes)	0,9	0,93	0,94	1,35	1,14	1,26
Input power (watt)	120	122	127	176	163	186
DIMENSIONS						
External dimensions (wxdxh)	725*655*865	1055*655*865	1305*655*865	1505*655*865	1705*655*865	1805*695*865
Internal dimensions (wxdxh)	606*536*697	936*536*697	1186*536*697	1386*536*697	1586*536*697	1686*576*741
Dimension A	725	1055	1305	1505	1705	1805
Dimension B	655	655	655	655	655	695
Dimension C	865	865	865	865	865	865
Dimension D	780	780	780	780	780	780
Dimension E	606	936	1186	1386	1586	1686
Dimension F	406	736	986	1186	1446	1486
Dimension G	536	536	536	536	536	576
Dimension H	697	697	697	697	697	741
Dimension J	447	447	447	447	447	491
Dimension L	850	850	850	850	850	850
Insulation (mm)	60	60	60	60	60	60
STANDARD						
Outer cabinet	White galv. Steel	White galv. Steel	White galv. Steel	White galv. Steel	White galv. Steel	White galv. Steel
Inner cabinet	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner	Steel inner liner
Insulation	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane	Polyurethane
Baskets	1	2	2	3	3	3
Lock	Inclusive	Inclusive	Inclusive	Inclusive	Inclusive	Inclusive
Thermometer	Digital	Digital	Digital	Digital	Digital	Digital
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Feet	Inclusive	Inclusive	Inclusive	Inclusive	Inclusive	Inclusive
OPTIONS						
Max. number of baskets possible	1	2	3	4	4	6
Dividers	Optional	Optional	Optional	Optional	Optional	Optional
Castors or castors w. brakes	Optional	Optional	Optional	Optional	Optional	Optional
Internal light	Optional	Optional	Optional	Optional	Optional	Optional
Graphics	Optional	Optional	Optional	Optional	Optional	Optional
APPROVALS						
CE	yes	yes	yes	yes	yes	yes
WEIGHT						
Net weight, kg	43	54	64	67	77	77
Gross weight, kg	46	58	68	71	82	82
SHIPPING						
20' cont. capacity	42	30	24	20	18	114
40' cont. capacity	90	64	50	46	40	30
40' HC cont. capacity	126	88	62	56	52	42
Standard trailer capacity	102	74	60	50	44	42

*) Climate class 4 has been changed into Climate class A according to the new EU regulation.
 *) Climate class 7 has been changed into Climate class B according to the new EU regulation.
 *) Climate class 5 has been changed into Climate class C according to the new EU regulation.