

ProPEX® Fitting Assembly

Submittal Information
Revision A: Feb. 15, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:


Approved By:

Technical Data

Fitting:	CA 360 Brass
O-ring:	Buna N
Maximum Temperature (no pressure):	220°F (104°C)
Maximum Pressure:	125 psi

Product Information and Application Use

The Uponor ProPEX® Fitting Assembly threads onto Uponor Manifold loop outlets.¹ The fitting is an R20 thread with a ProPEX connection used to connect Wirsbo hePEX™ plus tubing to the manifold in radiant heating applications.

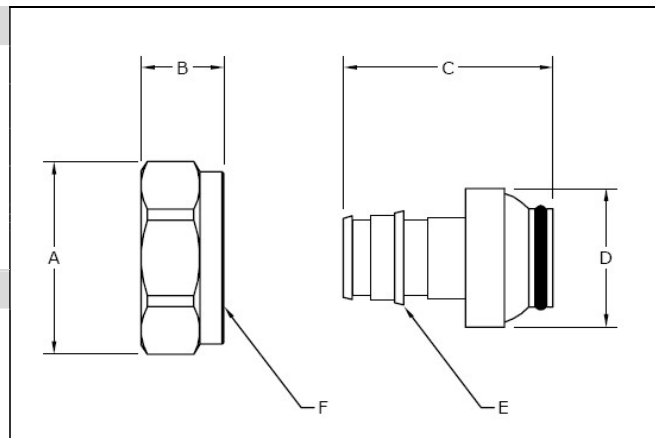

✓ Description	Part Number	A	B	C	D	E	F	Weight
<input type="checkbox"/> 3/8" ProPEX Fitting Assembly, R20 thread	Q4020375	1.37"	0.60"	1.20"	0.95"	3/8" ProPEX	R20	0.18 lbs.
<input type="checkbox"/> 1/2" ProPEX Fitting Assembly, R20 thread	Q4020500	1.37"	0.60"	1.31"	0.95"	1/2" ProPEX	R20	0.18 lbs.
<input type="checkbox"/> 5/8" ProPEX Fitting Assembly, R20 thread	Q4020625	1.37"	0.60"	1.47"	0.95"	5/8" ProPEX	R20	0.20 lbs.
<input type="checkbox"/> 3/4" ProPEX Fitting Assembly, R20 thread	Q4020750	1.37"	0.60"	1.55"	0.95"	3/4" ProPEX	R20	0.22 lbs.

Installation

R20 threads onto the Uponor Manifold loop outlets. Compression end enables direct connection to Wirsbo hePEX plus tubing. For more information, refer to the Uponor Radiant Installation Handbook.

Accessories: Replacement O-ring for insert, R20 (A4021116)

Standards

ASTM F877; ASTM F1960

Codes

N/A

Listings

NSF-rfh; R20: ISO 228-G 3/4"

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124
USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.