



PRECAUCIÓN:

Si los cables están dañados, deberán ser sustituidos por un técnico cualificado para evitar riesgos.
Riesgo de shock eléctrico.




CARACTERÍSTICAS TÉCNICAS:


ICEIP20POP 25W | 100-240V | 50/60Hz | 93/136mA -20~40°C | 0.7 | 356*86mm

INSTALACIÓN


1. Asegurese de desconectar la corriente general.




2. Quite la cubierta de la luminaria. Saque los cables de corriente a través de la base de la luminaria. Finalmente, coloque los tornillos para sujetar la base al techo.

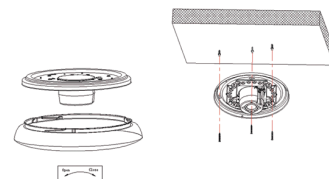


3. Conecte correctamente el cable de corriente al terminal de la base.



4. Coloque la tapa de la luminaria y apriete enroscando en sentido horario.

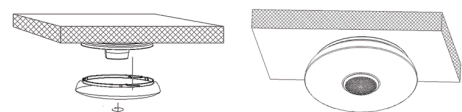


5. Conecte la corriente general y verifique el producto funciona correctamente.



PELIGRO

Desconecte la corriente antes de sustituir la luminaria.
NO USAR REGULADORES.


	Correct Disposal of this product This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.
---	--

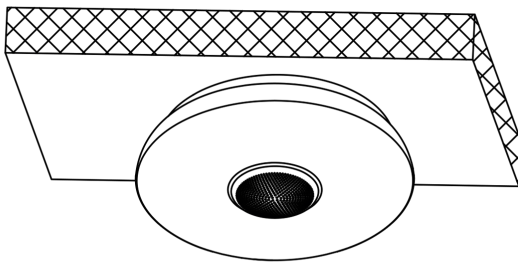

1. Instale el plafón en el techo.

2. Encienda el plafón. Para cambiar la temperatura de la luz, pulse el interruptor para apagar y encender la luz dentro de un margen de tiempo máximo de 2 segundos, y el tono cambiará como se muestra en el diagrama adjunto. Se puede escuchar música incluso con la luz apagada.

OFF ON Step 1 ↓ Light 4000k ON BT Speaker ON	OFF ON Step 2 ↓ Light 6500k ON BT Speaker ON	OFF ON Step 3 ↓ Light 2700k ON BT Speaker ON	OFF ON Step 4 ↓ Light OFF BT Speaker ON
--	--	--	---

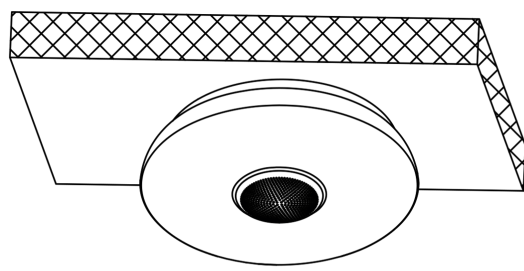

El plafón tiene función de memoria. Si se mantiene apagado durante mas de 3 segundos, recordará la última temperatura de color que tenía.

eg:


ON OFF Step 1 ↓ Light 6500k ON BT Speaker ON	More than three seconds →	ON OFF Step 2 ↓ Light 6500k ON BT Speaker ON
--	---------------------------	--

1


2

3

4

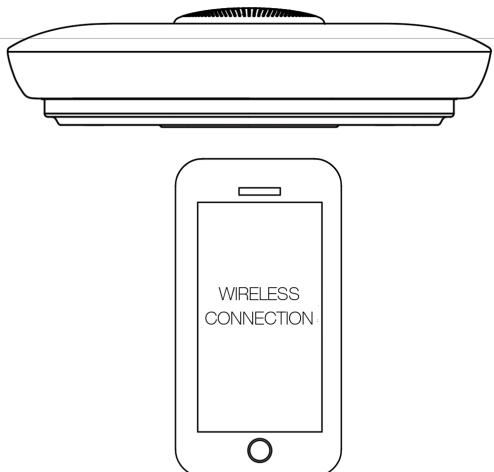

Conecte el móvil via inalámbrica. Seleccione la música deseada para reproducir (Nombre del plafón: Spkrlafon)

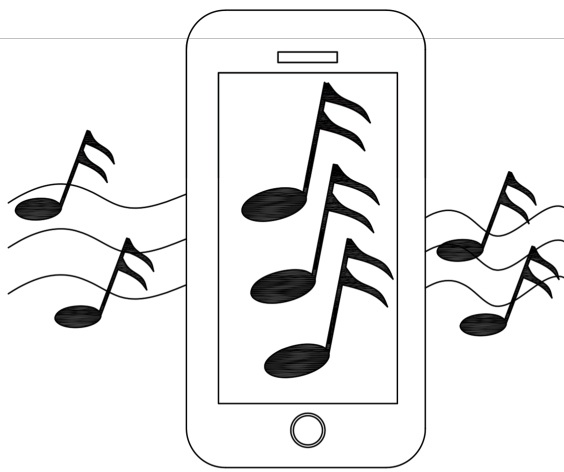

Disfrute de su música.

Round LED ceiling lamp CCT with Bluetooth Speaker

ICEIP20POP



CAUTION:

If the wire is damaged, it should be changed by a qualified electrician to avoid any risk.




TECHNICAL FEATURES:


ICEIP20POP 25W | 100-240V | 50/60Hz | 93/136mA -20~40°C | 0.7 | 356*86mm

INSTALLATION (FOR INTERNAL USE ONLY)


1. Make sure to turn off the main power.




2. Remove cover from fixture, and pull the power supply wires out the fixture pan, screw the fixture pan on ceiling.

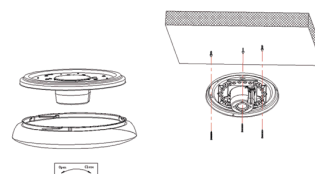


3. Connect the power cord and ground wire to the connection terminal.



4. Twist the Fixture cover clockwise.

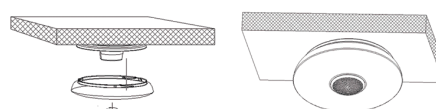


5. Turn on the power to verify that the product is working properly.



WARNING


Disconnect the Unit before replacing the Lamp.
DO NOT USE WITH DIMMERS.

	Correct Disposal of this product This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.
---	--

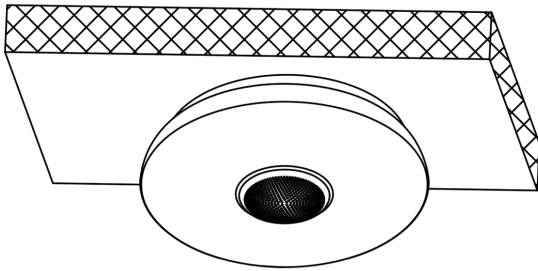

1、 Install the ceiling lamps.
2、 Turn off the ceiling. Color temperature switch ceiling by wall switch as below. The ceiling can broadcast the music even light out.

OFF Step 1 ↓ Light 4000k ON BT Speaker ON	ON Step 2 ↓ Light 6500k ON BT Speaker ON	OFF Step 3 ↓ Light 2700k ON BT Speaker ON	ON Step 4 ↓ Light OFF BT Speaker ON
---	--	---	---

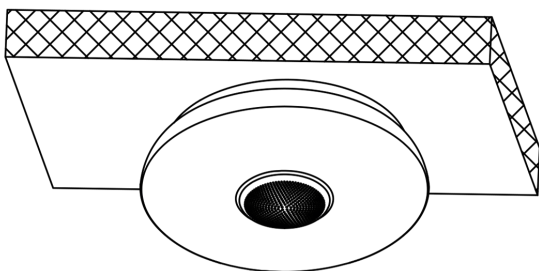

The lamps has the memory function. Light out for more than three seconds the ceiling will remember the color temperature of last time.

eg:


ON Step 1 ↓ Light 6500k ON BT Speaker ON	More than three seconds →	ON Step 2 ↓ Light 6500k ON BT Speaker ON
--	---------------------------	--

1

2

3

4

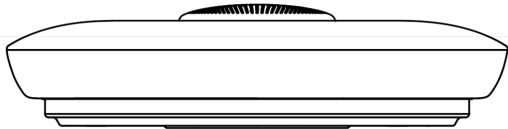


Connect wireless the cellphone's and open the Music APP.
(Ceiling lamp name: BLE Spkrplafon)



Enjoy the music.