



Manufacturer:
Jonard Tools®

Product Name:
Jonard Tools® MS-26 Mid-Span Buffer Tube & Cable Jacket Slitter (2.9mm-6.8mm)


Manufacturer Part Number:
MS-26

► Click here for more details on the Jonard Tools® MS-26 Mid-Span Buffer Tube & Cable Jacket Slitter (2.9mm-6.8mm)



These **PATENTED** slit and ring tools are designed to open fiber jackets and loose buffer tubes to provide easy fiber access.

SPECIFICATIONS	MS-526	MS-446	MS-426	MS-336	MS-326	MS-316	MS-306
# OF GROOVES	8 (4 Slitting, 4 Ringing)	8 (4 Slitting, 4 Ringing)	8 (4 Slitting, 4 Ringing)	4 (2 Slitting, 2 Ringing)	10 (5 Slitting, 5 Ringing)	10 (5 Slitting, 5 Ringing)	12 (6 Slitting, 6 Ringing)
GROOVE SIZES	9.8-10.2 mm 11.8-12.2 mm 15.4-15.8 mm 17.8-18.2 mm	8.7-9.1 mm 9.5-9.9 mm 11.8-12.2 mm 14.2-14.6 mm	5.8-6.4 mm 7.8-8.4 mm 9.8-10.4 mm 11.2-12 mm	7.9-8.2 10.7-11.0 mm	5.0-5.6 mm 6.0-6.6 mm 7.2-7.8 mm 7.8-8.4 mm 9.4-10 mm	2.9-3.6 mm 3.6-4.4 mm 4.4-5.2 mm 5.2-6.0 mm 6.0-6.8 mm	1.2-1.5 mm 1.5-1.8 mm 1.8-2.1 mm 2.1-2.5 mm 2.5-2.9 mm 2.9-3.3 mm
CABLE DIAMETER	9.8 mm-18.2 mm	8.7 mm-14.6 mm	5.8 mm-12 mm	7.9 mm-11 mm	5 mm-10 mm	2.9 mm-6.8 mm	1.2 mm-3.3 mm
CABLE TYPE	Corning Altos® with FastAccess®	AFL's Heavy Duty OSP MicroCore® (LMHD-Series)	Thick-walled jackets (up to 2.0 mm thick)	Corning's Minixtend HD 288 and 432	Thin-walled Jackets	Outer Jackets, Loose Buffer Tubes	Outer Jackets, Loose Buffer Tubes

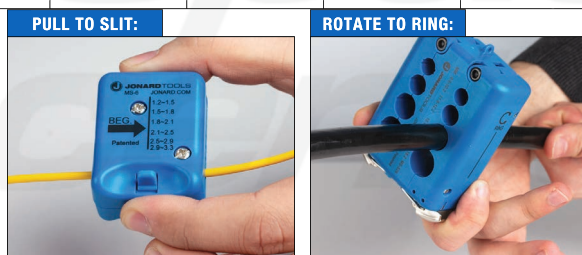

SPECIFICATIONS	MS-6	MS-26	MS-600
DESCRIPTION	Mid Span Slitter (1.2 mm-3.3 mm)	Mid Span Slitter (2.9 mm-6.8 mm)	Mid Span Shaving Tool (1.0 mm-3.3 mm)
# OF PRECISION GROOVES	6	5	6
GROOVE SIZES (MM)	1.2-1.5 mm 1.5-1.8 mm 1.8-2.1 mm 2.1-2.5 mm 2.5-2.9 mm 2.9-3.3 mm	2.9-3.6 mm 3.6-4.4 mm 4.4-5.2 mm 5.2-6.0 mm 6.0-6.8 mm	1.0-1.4 mm 1.4-1.8 mm 1.8-2.1 mm 2.1-2.5 mm 2.5-2.9 mm 2.9-3.3 mm
CABLE DIAMETERS	1.2 mm-3.3 mm	2.9 mm-6.8 mm	1.0 mm-3.3 mm
CABLE TYPE	Outer Jackets, Loose Buffer Tubes	Outer Jackets, Loose Buffer Tubes	Outer Jackets, Loose Buffer Tubes

REPLACEMENT CARTRIDGES	
JONARD PART #	DESCRIPTION
MSB-1533	Replacement Blades for MS-6
MSB-2968	Replacement Blades for MS-26
MS-306RB	Replacement Blades for MS-306
MS-316RB	Replacement Blades for MS-316
MS-336RB	Replacement Blade Set for MS-336
MSB-5010	Replacement Blades for MS-326
MS-426RB	Replacement Blades for MS-426
MS-446RB	Replacement Blades for MS-446
MS-526RB	Replacement Blades for MS-526
MS-600RB	Replacement Blades for MS-600

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are subject to change without notice.
FOC last update 12/16/2025.



Manufacturer:
Jonard Tools®

Product Name:
Jonard Tools® MS-26 Mid-Span Buffer Tube & Cable Jacket Slitter (2.9mm-6.8mm)

Manufacturer Part Number:
MS-26



[Learn More](#)

▶ [Click here for more details on the Jonard Tools® MS-26 Mid-Span Buffer Tube & Cable Jacket Slitter \(2.9mm-6.8mm\)](#)

MID SPAN SLIT & RING TOOL INSTRUCTIONS

These **PATENTED** slit and ring tools are designed to open fiber jackets and loose buffer tubes to provide easy fiber access. One side of the tool slits fiber jackets and loose buffer tubes, the opposite side rings fiber jackets and loose buffer tubes. All this is done without damage to the fiber. Blades are replaceable. Note: Thin walled cables are designed for cables used in ducts and microducts.


Simple to use:

- Select the correct groove. Grooves marked with the recommended cable size
- Place the cable in the groove to be used
- Note: The arrow on the top of the tool indicates the pulling direction and the line indicates the blade location
- To slit the cable, close the tool making sure lock is engaged and pull
- For ring operation use ring side of tool and repeat steps above, instead of pulling rotate the tool 3-6 times to ring the cable

MID SPAN SLITTING EXAMPLE:



MID SPAN RINGING EXAMPLE:

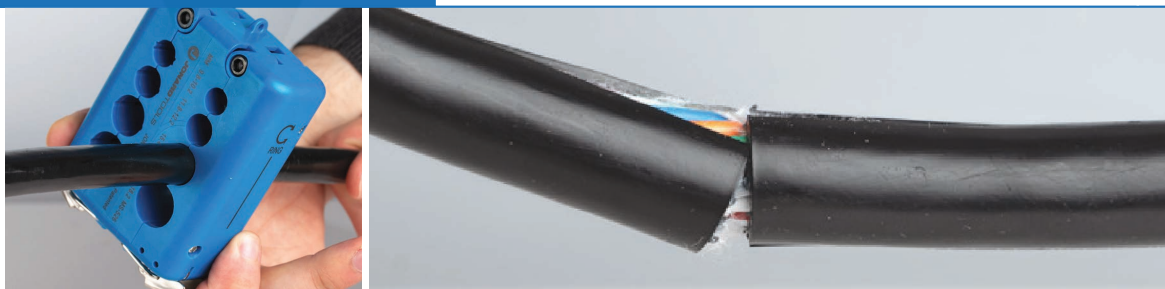

Contact the professionals at Fiber Optic Center for a quote or to get more details.

focenter.com • 508-992-6464 | (800) 473-4237 • sales@focenter.com

23 Centre Street • New Bedford, MA 02740 USA

Product specifications and data are
subject to change without notice.
FOC last update 12/16/2025.