


### Urban wall sensor

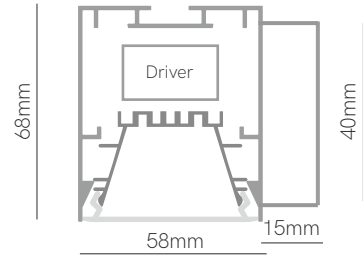

\*Finished luminaire. Includes power supply, base wall and end caps.

### Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Wall
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code <b>6</b>	Opal (112°) <b>1</b>	570mm (21W) <b>1</b>	<b>2.700K</b> (112 lm/W) <b>2</b>	Motion sensor <b>0</b>	<input type="checkbox"/> White (9003) <b>1</b>
		840mm (32W) <b>2</b>	<b>3.000K</b> (128 lm/W) <b>3</b>		<input checked="" type="checkbox"/> Black (9005) <b>2</b>
		1.130mm (43W) <b>3</b>	<b>4.000K</b> (136 lm/W) <b>4</b>		<input type="checkbox"/> Gray (9006) <b>3</b>
			<b>5.000K</b> (136 lm/W) <b>5</b>		<input checked="" type="checkbox"/> Custom RAL <b>3</b>

Code: **6** **1**    **0**



Consult delivery terms and conditions.  
\*Create your code according to your preferences.

