




Hands Free Audio Unit

ART 1/G+ SE

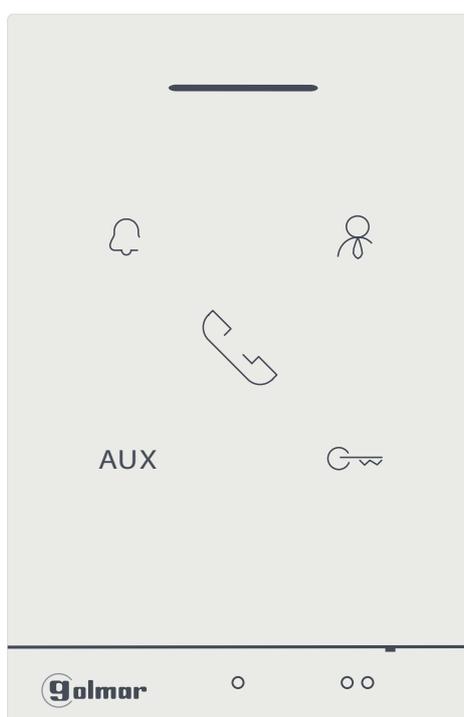

USER MANUAL

INDEX


1. Safety, cautions and warnings	3
2. Device description	3
3. Device operation	4
3.1 Call reception	4
3.2 Communication.....	4
3.3 Door panel self-activation	5
3.4 Intercom with another unit	5
4. Device settings.....	6
4.1 Volume adjustment and Do Not Disturb (DND)	6
4.2 Ring tones melody selection	6

1. SAFETY, CAUTIONS AND WARNINGS

- The installation and setup of this equipment must be done by an authorized installer in a suitable surface and following the current regulations.
- Do not touch the device with wet hands, or using cleaning liquids or aerosols.
- Install the device in a dry and secure area, protected against water drops or sprays.
- Avoid placing the device close to heating/cooling sources, humid or dusty areas.
- Do not cover the device ventilation openings to assure air flow circulation.
- Do not open the device cover or manipulate the monitor's electric circuit.
- Danger of electric shock.

2. DEVICE DESCRIPTION


ART 1/G+ is an audio indoor unit for IP G+ system. Below is described the main characteristic of the unit.

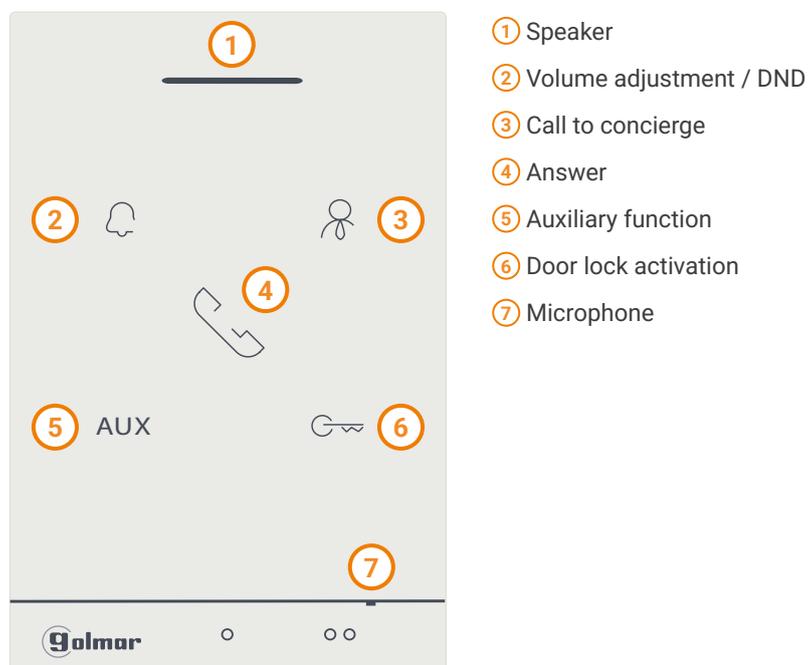

3. DEVICE OPERATION

3.1 Call reception

When receiving a call, the unit starts to ring, the "Answer" button, located at the center, will start to blink. Here below are described the functions that can be performed in this status.

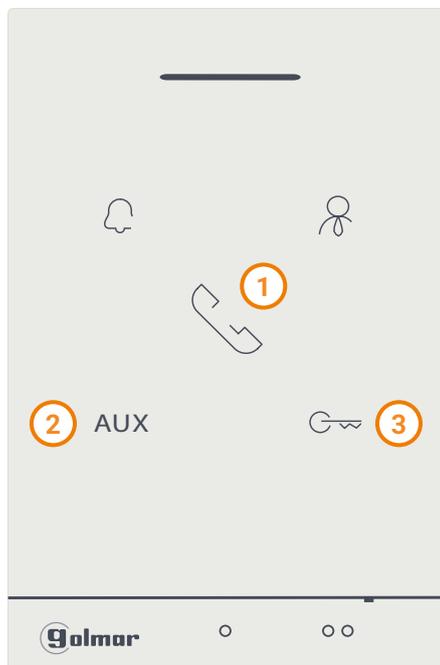

- ① Start communication
- ② Open door 2 (I)
- ③ Open door 1

3.2 Communication

During a communication process it is possible to perform the following actions described in the picture.



- ① Adjust audio communication volume
- ② Finish communication
- ③ Open door 2 (I)
- ④ Open door 1


(I) This function will operate only if a second door lock has been installed in the panel.

3.3 Door panel self-activation

It is possible to open the communication channel with the door panel without being called.

Press the "Answer" button for 5 seconds until it emits a tone, to acknowledge that the audio communication channel with panel 1 has been established. In this state the unit takes the same behaviour as when in **3.2 Communication**.

NOTE: This function only operates over the panel 1 of its own building.

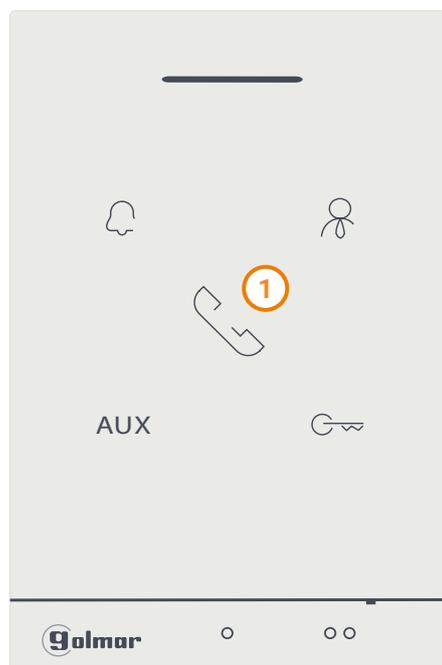


① Press and hold for 5 seconds

3.4 Intercom with another unit

Art 1 can intercom with the other units inside the apartment. To do so, press two times fast the "Answer" button. It will initiate an intercom call to all other devices within the apartment.

NOTE: This function only operates over EDGE monitors if they have the intercom function enabled.

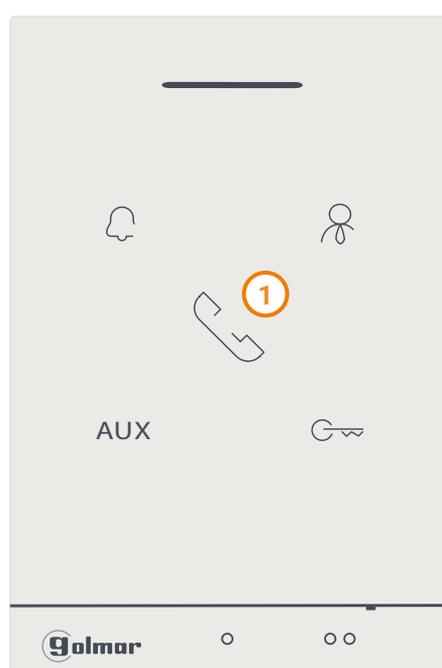

① Press twice fast


4. DEVICE SETTINGS

4.1 Volume adjustment and Do not Disturb (DND)

When the audio unit is in standby, it is possible to adjust the unit's calling ring tone volume.

Press the bell button for adjusting the volume in a cyclic way:

- Minimum - Medium - Maximum - Mute (DND) (II)

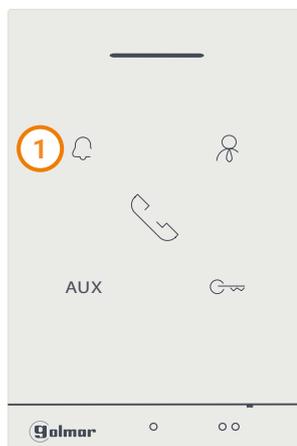

① Volume adjustment / DND

(II) Mute (Do Not Disturb): The unit will indicate this state by changing the LED color of the volume adjustment button into red colour.

4.2 Ring tones melody selection

It is possible to modify the ringtone of the unit for each of the different sources. Currently the unit can be called from three different sources:

- Door bell
- Door panel
- Intercom

To modify the melodies follow this steps:

1. Press the Volume button during 5 seconds until it emits 3 short beeps.
2. Adjust the melody of the different sources by pressing the corresponding button, each press changes the melody in cycle. There are 6 different melodies to be chosen. See the picture to identify which button modifies the desired source.



① Volume: Press during 5 seconds to enter or exit from melody adjustment menu

② Intercom melody selection

③ Door bell melody selection

④ Door panel melody selection

3. Once each source has been set to the desired melody, press again the volume button 5 seconds to exit the menu. Two short tones will indicate that the unit exited this menu.



we take care of your home

Golmar Sistemas de Comunicación S.A.
C/ Silici 13. Polígono Industrial Famadas
08940 - Cornellà de Llobregat - Spain
golmar@golmar.es - (+34) 93 480 06 96

www.golmar.es



Golmar se reserva el derecho a cualquier modificación sin previo aviso.
Golmar reserves the right to make any modifications without prior notice.
Golmar se réserve le droit de toute modification sans préavis.