




DIMENSIONS



ACCESSORIES

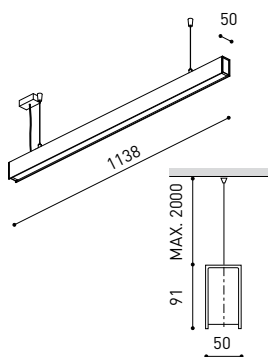

CUSTOM ACCESSORIES



WIRE TRIMLESS ACCESSORY

| | |
|-----------|--|
| Name | FIFTY SUSP CUSTOM 120 DIM DALI/PUSH 4000K NT |
| Reference | A2331222NT |
| Color | Textured black |
| RAL | 9005 |
| Category | CUSTOM SYSTEMS |

PRODUCT

| | |
|-----------------------------|---------------------------|
| Light source | LED |
| Gross luminous flux | 3000 Lm |
| Power | 20,4 W |
| Power values of the system | 23,18 W |
| Colour temperature | 4000 K |
| Colour Rendering Index | CRI>90 |
| Chromatic stability | MacAdam Step 2 |
| Light beam angle | 102° |
| Lighting efficiency | 70% |
| Efficacy | 147 Lm/W |
| Current intensity | 600 mA |
| Dimming | DALI / Push |
| Control through bluetooth | Please Consult |
| Driver | Included - Fast Connect |
| Electrical insulation class | ⊕ |
| Voltage | 220 V/240 V |
| Frequency | 50/60 Hz |
| Energy efficiency | A+ |
| LED lifespan | L80B10 (Tc=80°C) >60.000h |

LIGHTING INFORMATION


| | |
|----------------------|---------------------------|
| Ingress Protection | IP20 |
| Diffuser included | Yes |
| Weight | 4730 g. |
| Packaged weight | 6440 g. |
| Packaging dimensions | Ø168 × 1305 mm |
| Units per package | 1 |
| Materials | Aluminium / Polycarbonate |

OTHER DATA




Fifty Custom, is Arkoslight's profile solution for surface, recessed, suspension or wall applications for lighting projects where a very specific length is required. A tailored suit.



POLAR DIAGRAM

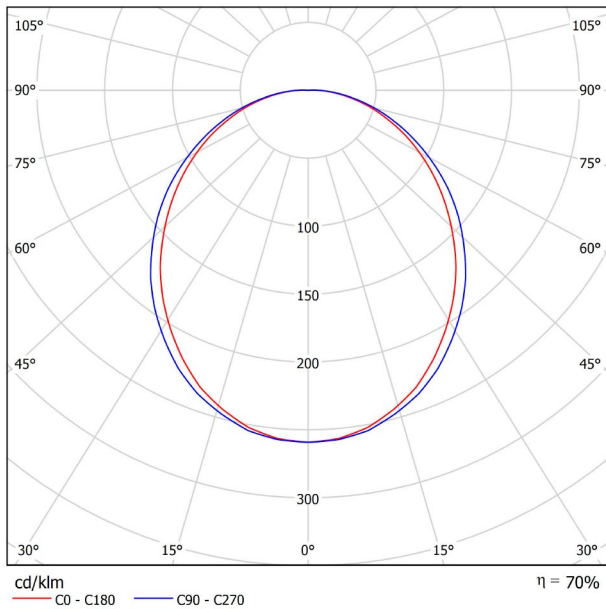

CONICAL DIAGRAM

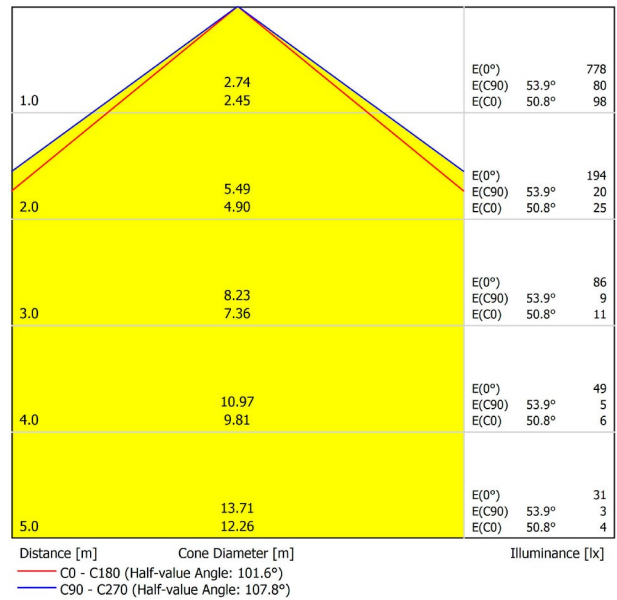

| | |
|------------------------------------|--|
| FIFTY 2 End Cap Kit | 1050-00-10- WT NT |
| FIFTY Straight Joiner | 1050-01-80 |
| FIFTY Suspension Cable | 1050-00-01 At least 2 units needed. Extra unit each 120 cm. required |
| FIFTY Suspension Power Line | A233-00-00- WT NT |
| | A233-00-10- WT NT |

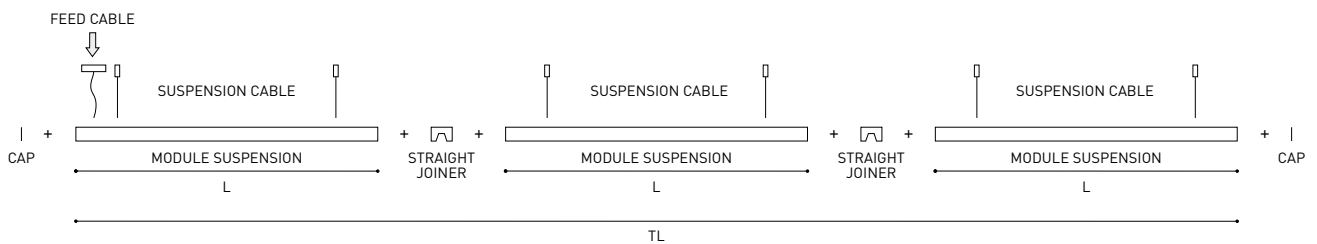

COLOUR | WT □ RAL 9016 | NT ■ RAL 9005 |


MATERIAL |  AL |

FEED




| PRODUCT | |
|-----------|---|
| Model | Mains Trimless |
| Reference | A023-00-01- W N |
| Colour | W <input type="checkbox"/> RAL 9016 N <input type="checkbox"/> RAL 9005 |
| Category | Accessories |

As many pieces as needed
according to your product



| PRODUCT | |
|-----------|---|
| Model | Mains Thick Trimless |
| Reference | A023-00-02- W N |
| Colour | W <input type="checkbox"/> RAL 9016 N <input type="checkbox"/> RAL 9005 |
| Category | Accessories |

As many pieces as needed
according to your product



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.


Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.

FASTENING



| PRODUCT | |
|-----------|---|
| Model | Steel Cable Trimless |
| Reference | A023-00-05- W N |
| Colour | W <input type="checkbox"/> RAL 9016 N <input type="checkbox"/> RAL 9005 |
| Category | Accessories |

As many pieces as needed
according to your product



Wire Trimless Accessory is a collection of accessories for fitting tensioners and cables to Arkoslight luminaires suspended directly from the ceiling with any visible ceiling rose or fixings. This achieves a minimalist application with a visually tidy finish.

With Wire Trimless Accessory the items adjacent to the ceiling of the standard product (ceiling roses, fixings, driver boxes, etc.) are concealed by a simple recessed application.

Wire Trimless Accessory reduces the visual impact of the installation leading to extremely minimalist aesthetics. The wires come out of the ceiling material as a part of the structure. This detail creates a much purer, more essential layout, particular when several luminaires are fitted in an arrangement.