

JET 1 (JE-30436)



Product description

Ø102 - 180 mm - Down (Optic) & Up (Optic 2nd) - Round



microPrim™


Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Durable silicone rubber gasket
- High-efficiency optical reflector
- Clear toughened glass
- Integral control gear


- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible
- JET luminaires with uplight and colder than 3000K CCT do not meet the IDA certification requirements

Optic

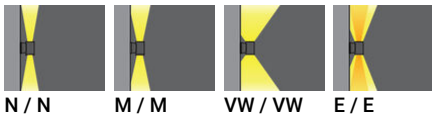

N / N M / M VW / VW E / E

Product colour




01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

JET 1 (JE-30436)


Technical information

Material	Aluminium
Light source	1 & 1 MR16-GU10
Power	15 W
Lumen	508 - 790 lm
Efficacy	34 - 53 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	N, M, VW, E
Optic value	13°, 23°, 60°, 12°x51°
Optic (2nd)	N, M, VW, E
Optic (2nd) value	13°, 23°, 60°, 12°x51°
CCT / CRI	3000K CRI95, 4000K CRI95
Bug	B0-U3-G0, B1-U3-G0
ULR	43%, 46%, 47%, 49%, 50%, 51%, 53%, 54%, 57%
ULOR	43%, 46%, 47%, 49%, 50%, 51%, 53%, 54%, 57%

Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	1.1 kg
Operating temperature	-20 °C to 50 °C
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, Clear toughened glass

JE-30436

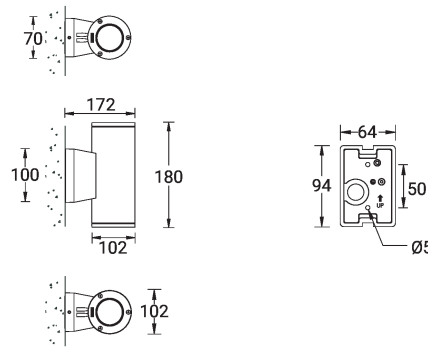

JET 1 (JE-30436)**Accessory**



Surface mounting box for easy
cabling (JET 1)
SCE-JET-1
