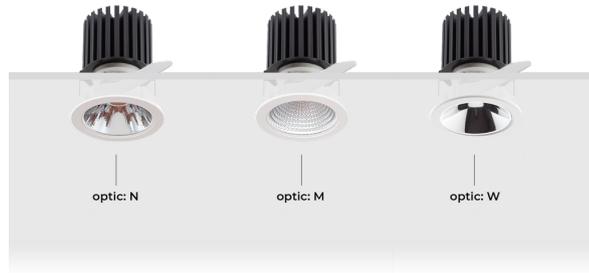


BRISBANE 10 (BRB-80021)**Product description**

Ø90 mm

**Luminaire Structure**

- Die-cast aluminium housing with powder coating
- Thin 1.3mm white polycarbonate trim
- Remote driver (included)
- Reflector finishes options (Satin black, Satin gold, Matt white)
- CRI 95

Optic**Product colour**


BRISBANE 10 (BRB-80021)

Technical information

Material	Aluminium
Light source	1 COB
Power	14 W
Lumen	1330 - 1356 lm
Efficacy	95 - 97 lm/W
Driver option	Remote driver (included)

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W
Optic value	24°, 35°, 50°
CCT / CRI	3000K CRI95, 4000K CRI95
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, White
Weight	0.5 kg
Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	Reflector finishes options (Satin black, Satin gold, Matt white), Thin 1.3mm white polycarbonate trim



BRISBANE 10 (BRB-80021)

Accessory



Reflector finish (Matt white)
A80023-MW



Reflector finish (Satin black)
A80023-SB



Reflector finish (Satin gold)
A80023-SG



DALI Control System
Control-DALI