


DATOS TÉCNICOS TECHNICAL DATA

Referencia de producto	23003
Product reference	23003
Descripción	Mirilla de maniobra 2 modulos IP66/67
Description	Operation viewing window 2 modules IP66/67 SpeedPRO
Peso neto (Kg)	0.156
Net weight	0.156
ETIM 9.0	EC002287
Intensidad	-
IEC-Amperage	-
Polos	-
Poles	-
Voltaje	-
Voltage	-
Horas	-
Hour position	-
Color	Gris
Colour	Grey
Tipo de conexión	-
Connection sistem	-
Material	PC
Material	PC
Material de contacto	-
Contact material	-
Cable admitido	-
Wire flexible	-
Diámetro exterior de cable admisible	-
Permissible cable outside diameter	-
Longitud del cable	-
Cable length	-
Grado de protección	IP66/67
Protection degree	IP66/67
Resistencia al impacto	IK08
Impact resistance	IK08
Ensayo de bola	80°C
Ball pressure test	80°C
Resistencia al aislamiento	>10MΩ
Insulating resistance	>10MΩ
Rigidez dieléctrica (kV)	2.5
Dielectric Strenght (kV)	2.5
Temperatura de funcionamiento	-25°C/ 40°C
Operating temperature	-25°C/ 40°C
Temperatura de resistencia	-
Temperature resistance	-

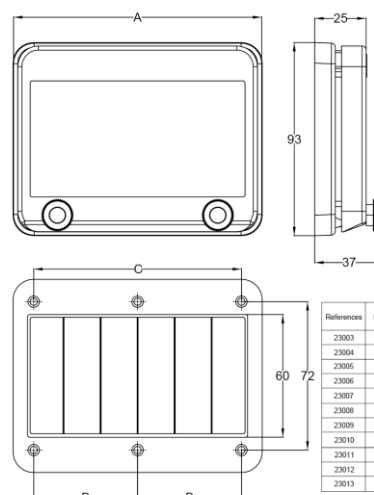

References	Modules	Dimensions		
		A	B	C
23003	2	49	27	32
23004	4	85	65	72
23005	5	103	41.5	90
23006	6	121	50.5	108
23007	7	139	59.5	126
23008	8	157	68.5	144
23009	9	175	77.5	162
23010	10	193	86.5	180
23011	12	229	104.5	215
23012	13	247	113.5	234
23013	18	367	159	324

Dimensiones en mm / Dimensions in mm

DATOS LOGÍSTICOS LOGISTICS

Unidad mínima de venta	2
Minimum sales unit	2
EAN Unitario	8429760277408
EAN Unit	8429760277408
Cantidad estuche	2
Quantity inner box	2
EAN Estuche	8429760287407
EAN Inner box	8429760287407
Cantidad caja	40
Quantity master box	40
EAN Caja	-
EAN Master box	-
Partida arancelaria	85381000
HS code	85381000

NORMATIVAS Y CERTIFICACIONES APPLIED AND CERTIFICATIONS

Normativa	IEC/EN 61439-1, IEC/EN 61439-3
Applied	IEC/EN 61439-1, IEC/EN 61439-3
Directiva baja tensión	Low Voltage Directive 2014/35/UE
Low Voltage Directive	Low Voltage Directive 2014/35/UE
Directiva Rohs	-
Rohs Directive	-
Certificado de producto	-
Product certificate	-

