

The background of the image shows two women in profile, looking at a large, vertical touchscreen display. The display is illuminated with a blue light and shows a complex, abstract pattern of lines and dots. The scene is set at night, with blurred city lights visible in the background. The AVNET INTEGRATED logo is overlaid on the left side of the image.

AVNET[®] INTEGRATED

SIMPLE PLUS OPEN FRAME

GEO-215R9B250C1000-I-PBVM-PG018-G

avnet.com/integrated

GEO-215R9B250C1000-I-PBVM-PG018-G

1 YEAR WARRANTY

21.5" OPEN FRAME

CERTIFICATIONS : CE , FCC

DESCRIPTION

Avnet Embedded Open Frame provides the answer, handling the entirety of the display design for you and building optimized solutions based on modular combinations of standard displays and TFT multi-touch assemblies. Delivered as a pre-assembled unit that incorporates the power supply, touch controller and other components, an Open Frame is built into a no-bezel metal housing for simple integration into your solution. All-in-one computers are a variation on this approach that add the processor, memory and other components to create a full system. Both allow for flexible mounting options to support an open-ended variety of implementations.



Advantages

Six capabilities of Avnet integrated Open Frames and AIO that mean successful solution development

Compatibility and Ease of Integration



- Integrate with multiple generations and standards of equipment
- Implement in environments with space, thermal and other constraints
- Customize easily for individual solution requirements

Optimized Human-Machine Interaction



- Tailor display to size, aspect ratio and resolution needed
- Control input without external devices such as keyboard or mouse
- Support use by operators with gloved hands

Rugged Durability and Longevity



- Offer dependability of low failure rate and long lifespan
- Operate in extremes of dust, heat, moisture, shock and vibration
- Protect displays against glare, scratches, fingerprints and vibration

Flexible Mounting and Customizability



- Specify options such as processor, video card and interfaces
- Mount in enclosure, on equipment, on panel or using VESA
- Meet constraints with fanless install and solid state storage

Long-Term Cost-Effectiveness



- Eliminate one-time-engineering costs to develop custom display
- Simplify ongoing maintenance with Avnet-engineered solution
- Scale system performance with upgradeability when needed

Low Power Consumption and Noise



- Tailor power/performance balance with broad choice of components
- Reduce operating noise by eliminating exhaust fans
- Avoid pulling in dust and contaminants with passive cooling designs

Technical Data**GEO-215R9B250C1000-I-PBVM-PG018-G**



Panel Data	
Panel Size	21.5"
Display Ratio	16:9
Resolution	1920(RGB)×1080 [FHD] 102PPI
Panel type	a-Si TFT-LCD IPS
Color	16.7M , 72% sRGB
Brightness (nits)	250 cd/m ² (Typ.)with P-cap 220 cd/m ² (Center brightness)
Contrast	1000:1 (Typ.)
View Angle	89/89/89/89 (Typ.)(CR≥10)
Backlight	WLED
Life (hrs)	50K hours
Touch Screen	
Type	Capacitive touch screen
Touch points	10 points
Touch Screen Structure	Glass+Glass(G+G); SIS solution
Cover glass	1.8mm;black
Input Method	Finger or Cap. Stylus
Bonding with TFT	Air bonding
Hardness	6H

Technical Data

GEO-215R9B250C1000-I-PBVM-PG018-G

Specification	
Material	plastic material RAL 7035
Installation	Wall Mounted; desktop
Speaker	8Ω2W*2
Signal input	HDMI 1.4 /DP 1.2
Interface	1*HDMI;1*USB(TOUCH);1*DC-IN;1*DP
Menu Language	Multilingual
OSD	AUTO - + MENU POWER
Power Supply	DC12V
Operating condition:	Temperature: 0 -60 degrees Celsius ; Humidity:10%-90%
Storage condition:	Temperature: -10 +60 degrees Celsius; Humidity:10%-90%
Certificate	CE,FCC,ROHS

SIZE

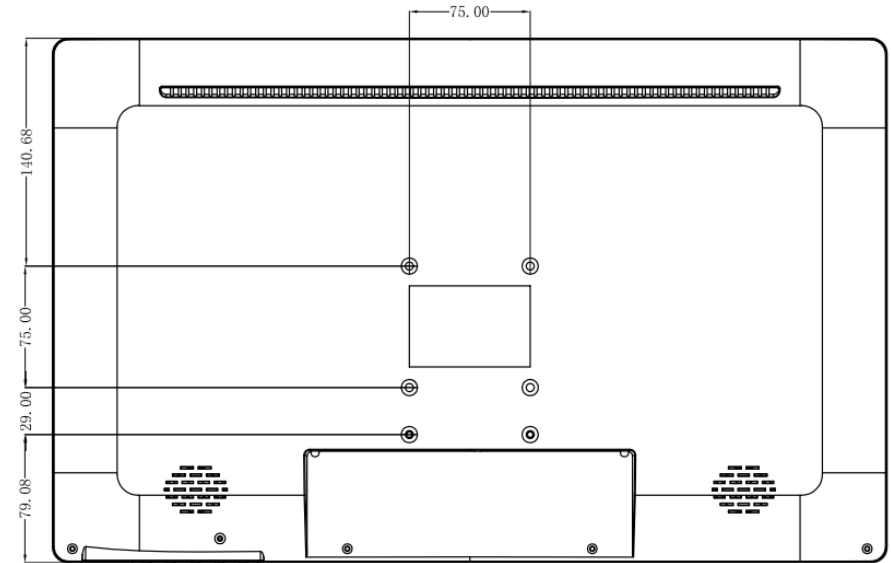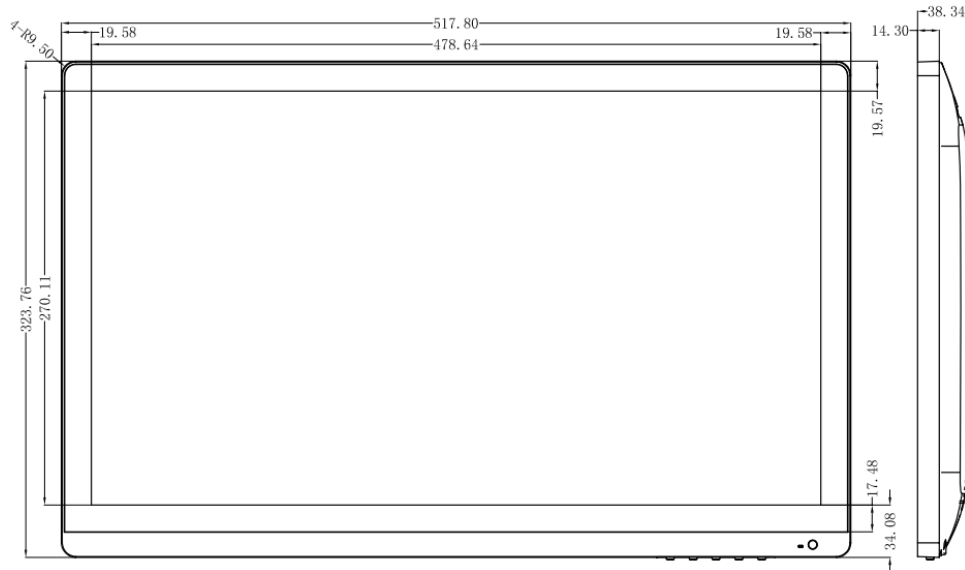

Avnet Integrated
MSC Technologies GmbH
Industriestr. 16
76297 Stutensee

integrated@avnet.eu
avnet.com/integrated