

DW 8500.1 S

Chimney cooker hood – Headroom concept



EAN / TKI Code

- EAN Code 4037321048684
- TKI Code 122940004

Features

- 4 Power levels incl. high power setting
- Extraction rate (to the outside): max. normal power setting 620 m³/h, Intensive power setting 770 m³/h
- Electronic control with touch control sensors
- Digital display
- Rim suction
- Automatic delay stop
- Drop down glass panel
- Metal grease filter
- Adjustable to ceiling height due to telescopic chimney section
- Recirculation mode possible (see optional accessories)

Technical data

- Electrical connection 252 W
- Exhaust air connection Ø 150 mm
- LED light colour 3,000 Kelvin


Optional accessories

- Charcoal filter 603

Dimensions

- Appliance dimensions W x H x D approx. 798 x 832-1,032 x 378 mm


Drawing

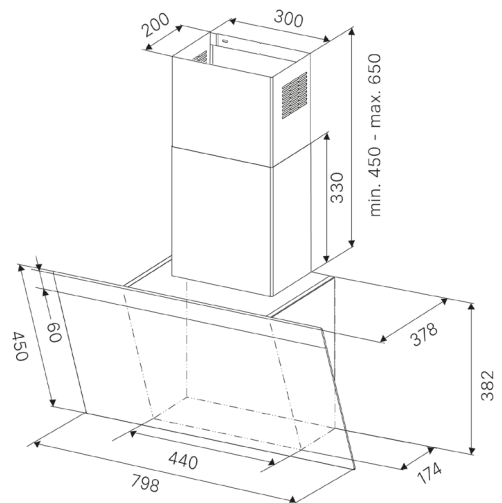

In recirculation mode, maintain sufficient distance from adjacent surfaces to avoid air turbulence.

Dimension from lower edge of hood to upper edge of exhaust air connection X = 300 mm.

Energy label

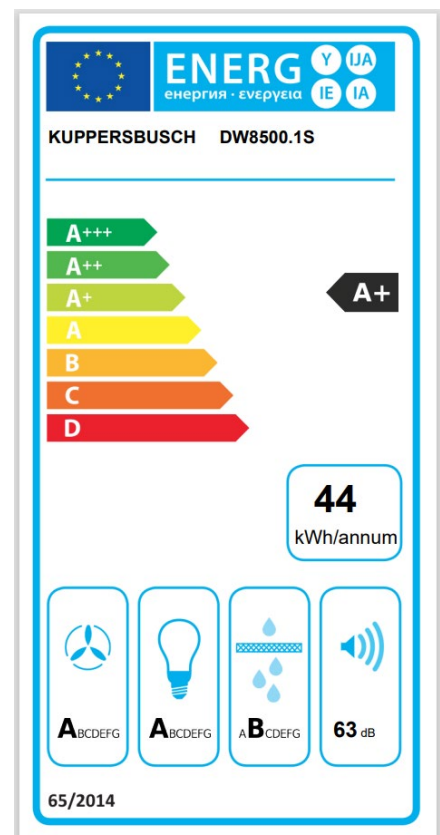

Product fiche	
Delegated Regulation (EU) 65/2014	
Supplier name or trademark	Küppersbusch
Model identifier	DW8500.1S
Annual Energy Consumption	43,5 kWh/annum
Energy Efficiency Class	A+
Fluid Dynamic Efficiency	34,9
Fluid Dynamic Efficiency class	A
Lighting Efficiency	68,0 Lux/W
Lighting Efficiency class	A
Grease Filtering Efficiency	85,1 %
Grease Filtering Efficiency class	B
Air flow (min speed normal use)	300 m³/h
Air flow (max speed normal use)	620 m³/h
Air flow (intensive or boost use)	770 m³/h
Airborne acoustical A-weighted sound power emissions (min speed normal use)	48 dB
Airborne acoustical A-weighted sound power emissions (max speed normal use)	63 dB
Airborne acoustical A-weighted sound power emissions (intensive or boost use)	68 dB
Power consumption in off mode (W)	0,49 W
Power consumption in standby mode (W)	0,01 W