

DW 9340.1 E

Chimney cooker hood



EAN / TKI Code

- EAN Code 4037321048516
- TKI Code 122970002

Features

- 4 power levels incl. high power setting
- Extraction rate (to the outside): max. normal power setting 600 m³/h, intensive power setting 750 m³/h
- Electronic control with illuminated push buttons
- Metal grease filter
- Adjustable to ceiling height due to telescopic chimney section
- Recirculation air mode possible (see optional accessories)

Technical data

- Electrical connection 272 W
- Exhaust air connection Ø 150 mm
- LED light colour 3,000 Kelvin


Optional accessories

- Charcoal filter 870
- PlasmaMade filter ZD 8000

Dimensions

- Appliance dimensions W x H x D approx.
900 x 730-1,000 x 460 mm


Drawing

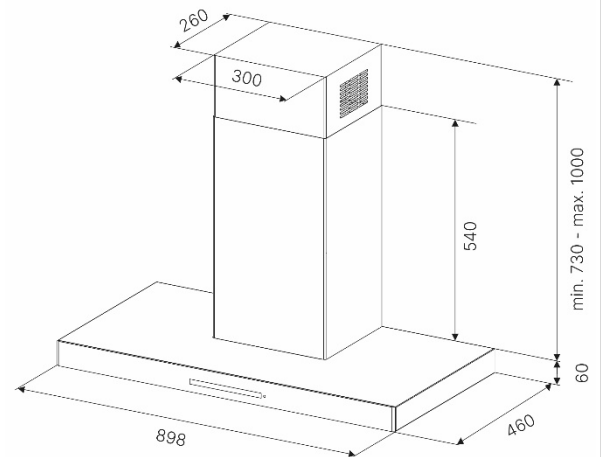

In recirculation mode, maintain sufficient distance from adjacent surfaces to avoid air turbulence.

Dimension from lower edge of hood to upper edge of exhaust air connection X = 300 mm.

Energy label

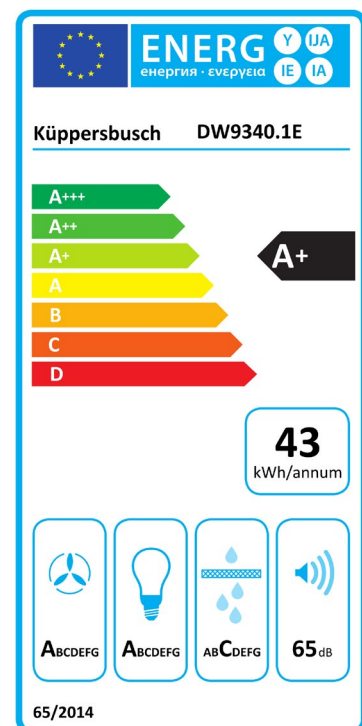

Küppersbusch

Product fiche	
Delegated Regulation (EU) 65/2014	
Supplier name or trademark	Küppersbusch
Model identifier	DW9340.1E
Annual Energy Consumption	42,7 kWh/annum
Energy Efficiency Class	A+
Fluid Dynamic Efficiency	34,8
Fluid Dynamic Efficiency class	A
Lighting Efficiency	91,0 Lux/W
Lighting Efficiency class	A
Grease Filtering Efficiency	75,1 %
Grease Filtering Efficiency class	C
Air flow (min speed normal use)	280 m³/h
Air flow (max speed normal use)	600 m³/h
Air flow (intensive or boost use)	750 m³/h
Airborne acoustical A-weighted sound power emissions (min speed normal use)	50 dB
Airborne acoustical A-weighted sound power emissions (max speed normal use)	65 dB
Airborne acoustical A-weighted sound power emissions (intensive or boost use)	69 dB
Power consumption in off mode (W)	0,49 W
Power consumption in standby mode (W)	0,01 W