

SANDY 6 (SA-31521-1MS)



Product description

Small - With integrated motion sensor



microPrim™



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser


- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour

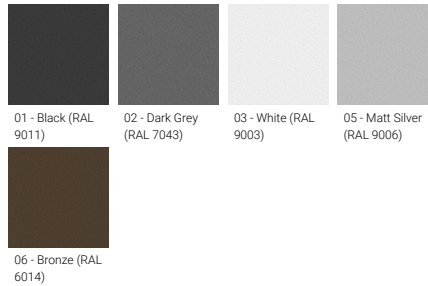

Special finishes upon request

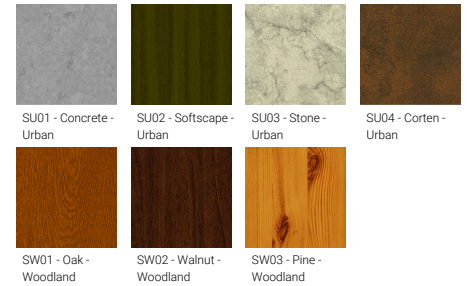

SANDY 6 (SA-31521-1MS)



Technical information

Material	Aluminium
Light source	80 LED
Power	19 W
Lumen	1602 - 1686 lm
Efficacy	84 - 89 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	108°x108°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U4-G2
ULR	49
ULOR	49
CIE flux code n°3	68
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	2.1 kg
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 37,000
Lifetime L80B10 (hours)	> 78,000
Lifetime L80B50 (hours)	> 86,000

SA-31521-1MS



SANDY

- Blue Motion sensor - Microtime - 1-10 V**
Adjustable sensor (10 seconds - 15 minutes)
30° sensitivity
Sensor detection area
SA-31521-1MS, SA-31521-1MS, SA-31521-1MS (2.7 - 4.8 m)
SA-31521-1MS, SA-31521-1MS (3.0 - 7.0 m)
SA-31521-1MS, SA-31521-1MS, SA-31521-1MS, SA-31521-1MS (3.0 - 4.5 m)
- Orange Motion sensor - Microtime - On/Off**
Adjustable sensor (5 seconds - 30 minutes)
30° sensitivity
Sensor detection area
SA-31521-1MS, SA-31521-1MS, SA-31521-1MS (2.7 - 4.8 m)
SA-31521-1MS, SA-31521-1MS (3.0 - 7.0 m)
SA-31521-1MS, SA-31521-1MS, SA-31521-1MS, SA-31521-1MS (3.0 - 4.5 m)

SANDY 6 (SA-31521-1MS)**Accessory**



Surface mounting box for easy
cabling (SANDY 6)
SCE-SANDY-6



DALI Control System
Control-DALI



Remote controller for the motion
sensor - 1-10V (A34191)
A34391
