

LEEDS WEDGE 1 (LEW-30001)



Product description


Small




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency PMMA lens
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic

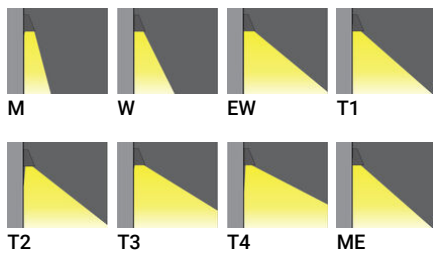

Product colour

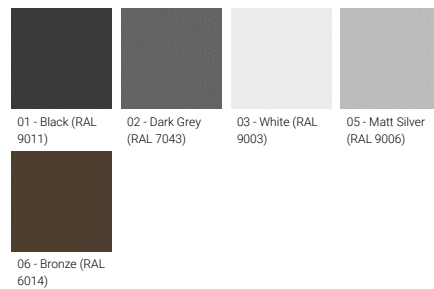

Special finishes upon request



LEEDS WEDGE 1 (LEW-30001)

Technical information

Material	Aluminium	Optic value	30°, 56°, 99°x102°, 140°x73°, 130°x50°, 112°x80°, 90°x61°, 122°x50°	Operating temperature	-20 °C to 50 °C
Light source	4 LED	CCT / CRI	3000K CRI80, 4000K CRI80	Through wiring	Single cable entry
Power	8 W	Bug	B0-U0-G0, B0-U1-G0, B1-U0-G0, B1-U1-G1, B1-U2-G0, B1-U2-G1	Lens / Reflector / Optic	Clear toughened glass, High-efficiency PMMA lens
Lumen	565 - 795 lm	ULR	<1%	MacAdam Ellipse	3 SDCM
Efficacy	71 - 114 lm/W	ULOR	<1%	Lifetime L90B10 (hours)	> 90,000
Driver option	Integral control gear	CIE flux code n°3	100, 96, 97, 99	Lifetime L80B10 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	On/Off	Lifetime L80B50 (hours)	> 90,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Optic	M, W, EW, T1, T2, T3, T4, ME	Weight	0.8 kg		

LEW-30001

