

SANDY 6 (SA-31522)



Product description

Small - Tunable White




microPrim™

Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic



6

Product colour



Special finishes upon request




SANDY 6 (SA-31522)

Technical information

Material	Aluminium	Optic	G	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	160 LED	Optic value	109°x109°		
Power	20 W	CCT / CRI	TW (2700K - 6500K)	Weight	2.4 kg
Lumen	1583 lm	Bug	B0-U4-G2	Operating temperature	-20 °C to 40 °C
Efficacy	79 lm/W	ULR	50	Through wiring	Two cable entries for through wiring
Driver option	Integral control gear	ULOR	50	Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
Driver	Constant current (CC)	CIE flux code n°3	68	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Dimming type	DALI		

SA-31522

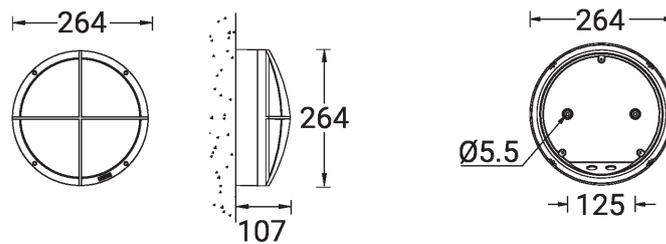

SANDY 6 (SA-31522)**Accessory**



Surface mounting box for easy
cabling (SANDY 6)
SCE-SANDY-6
