

VANCOUVER 65 (VA-70041) (Version 1)



Product description

160x160 mm - 400 mm



microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency polycarbonate lens
- Clear toughened glass
- Integral control gear

Optic



G

Product colour

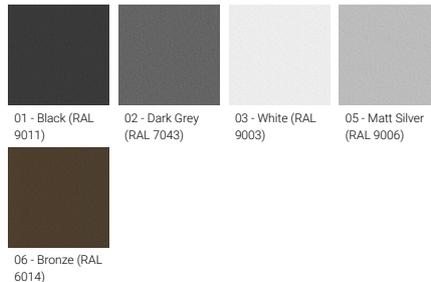

Special finishes upon request




VANCOUVER 65 (VA-70041) (Version 1)

Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 1 COB |
| Power | 8 W |
| Lumen | 400 - 420 lm |
| Efficacy | 50 - 53 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |
| Optic | G |

| | |
|--------------------------|--|
| Optic value | 33°x73° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B0-U3-G1 |
| ULR | 32.3 |
| ULOR | 32.3 |
| CIE flux code n°3 | 89 |
| Dimming type | On/Off |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 6.4 kg |

| | |
|---------------------------------|---|
| Operating temperature | -20 °C to 40 °C |
| Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | High-efficiency polycarbonate lens, Clear toughened glass |
| MacAdam Ellipse | 3 SDCM |
| Lifetime L90B10 (hours) | > 61,000 |
| Variants (On/Off) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

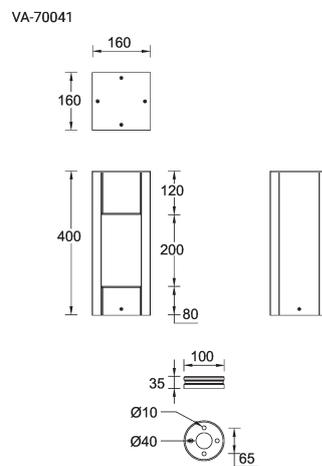

Accessory



Anchor bolt
A12191
