

**LIGHTALK 1 (LA-60001)****Product description**

With recessing box - Integral control gear - 655 mm - Class I

**Luminaire Structure**

- Die-cast aluminium end-caps
- Extruded aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Single cable entry, through wiring upon request
- One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is included
- Suitable for walk-over with a maximum load of 500 kg
- 24 VDC input, DMX/RDM address with stable signal

**Optic**

VN    N    M    W



E

**Product colour**

00 - Stainless Steel

**LIGHTALK 1 (LA-60001)**


**Technical information**

<b>Material</b>	Stainless Steel
<b>Light source</b>	18 LED
<b>Power</b>	28 W
<b>Lumen</b>	1943 - 2847 lm
<b>Efficacy</b>	69 - 102 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	VN, N, M, W, E

<b>Optic value</b>	12°, 14°, 24°, 44°, 18° x35°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B0-U5-G0
<b>ULR</b>	100%
<b>ULOR</b>	100%
<b>Dimming type</b>	On/Off, 1-10V, DALI
<b>Product colours</b>	Stainless Steel
<b>Weight</b>	4.6 kg
<b>Operating temperature</b>	-20 °C to 40 °C

<b>Cable</b>	One IP67 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry, through wiring upon request
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 120,000
<b>Lifetime L80B10 (hours)</b>	> 120,000
<b>Lifetime L80B50 (hours)</b>	> 120,000
<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LA-60001

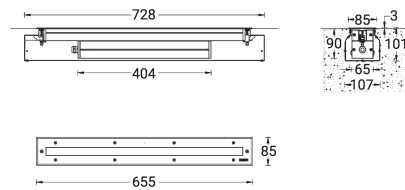

**LIGHTALK 1** (LA-60001)**Accessory**

---



---

Connector IP68 3 Pin Power  
**A62591**

---



---

DALI Control System  
**Control-DALI**

---



---

Connector IP68 5 Pin Power +  
Signal  
**A613191**

---