


NYBRO 8 (NYB-30356)



Product description

Down (Optic) & Up (Optic 2nd) - 60x95 mm - 2330 mm
- RGBW DMX

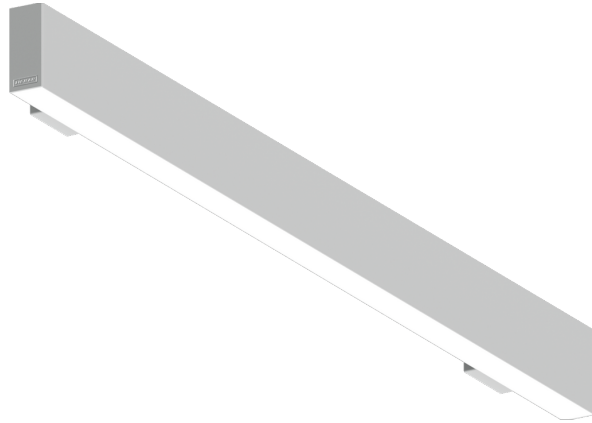

microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Up and down light distribution options
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

Optic



Product colour



Special finishes upon request




NYBRO 8 (NYB-30356)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	CIE flux code n°3	96, 98
Light source	384 & 368 LED	Optic	O, P	Dimming type	DMX, DMX/RDM
Power	164 W	Optic value	Opal, Micro-prismatic	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Lumen	11374 lm	CCT / CRI	RGBW40		
Efficacy	92 lm/W	Bug	B1-U5-G0, B1-U5-G1		
Driver option	Integral control gear	ULR	52%, 60%	Weight	8.7 kg
Driver	Constant current (CC)	ULOR	52%, 60%	Operating temperature	-20 °C to 40 °C
				Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

NYB-30356

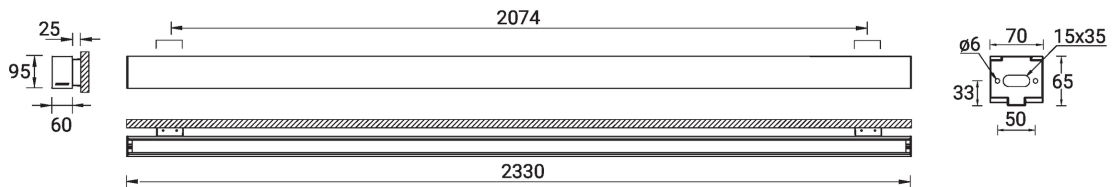

NYBRO 8 (NYB-30356)**Accessory**

Continuous-coupler bracket
(60/70 mm Down & 60 mm
Down & Up profile)
A81581



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM