

ODESSA 2 (OD-21037)



Product description

Medium - Supplied with specific 6 m cylindrical, tapered galvanised steel pole: SPT160147-OD




microPrim™

Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Maximum wind load resistance is 160 km/h
- RGBW available upon request

Optic



VN

Product colour



Special finishes upon request




ODESSA 2 (OD-21037)

Technical information

Material	Aluminium
Light source	4 x 3 LED
Power	108 W
Lumen	6544 - 8020 lm
Efficacy	61 - 74 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	VN

Optic value	8°
CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B2-U0-G0, B3-U0-G0
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	66.9 kg

Operating temperature	-20 °C to 40 °C
EPA (m2)	0.703
Cable	One cable gland supplied with 2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 109,000
Lifetime L80B10 (hours)	> 109,000
Lifetime L80B50 (hours)	> 109,000

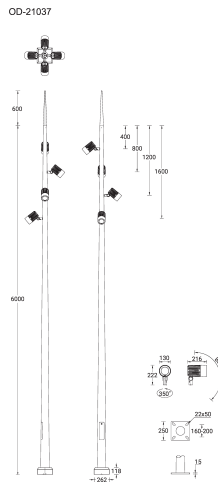

ODESSA 2 (OD-21037)**Accessory**



Anti-glare visor
A80131



Anti-glare louvre
A80231



Linear spread lens
A80114



Root mount kit
A20491

Please contact the factory for technical details if you wish to use Anti-glare accessories, Colour filters, Lenses and slip glasses in combination.

Pole (required)



6 m - Cylindrical, tapered
galvanised steel pole for
ODESSA
SPT160147-OD