

**OULU 7** (OUL-80912)**Product description**

Down (Optic) & Up (Optic 2nd) - 45° - R1250 - Tunable White



microPrim™

**Luminaire Structure**

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Multiple angles available
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- Opal PMMA diffuser (UGR <19) for glare control
- Integral control gear
- Steel brackets for ceiling down mounting option
- Up and down light distribution options

- Wireless control available through Bluetooth connection

**Optic**


0

**Product colour**

01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

**Special finishes upon request**

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

**OULU 7** (OUL-80912)


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 240 & 240 LED         |
| <b>Power</b>         | 31 W                  |
| <b>Driver option</b> | Integral control gear |
| <b>Driver</b>        | Constant current (CC) |

|                        |   |
|------------------------|---|
| <b>Input voltage</b>   | 220-240 V 50/60 Hz  |
| <b>Optic</b>           | O   |
| <b>CCT / CRI</b>       | TW (2700K - 6500K)  |
| <b>Dimming type</b>    | DALI  |
| <b>Product colours</b> | Black, White, Matt Silver,<br>Concrete - Urban, Softscape -<br>Urban, Stone - Urban, Corten -<br>Urban, Oak - Woodland, Walnut -<br>Woodland, Pine - Woodland |

|                              |   |
|------------------------------|---|
| <b>Weight</b>                | 3.1 kg  |
| <b>Operating temperature</b> | -20 °C to 40 °C   |
| <b>Variants (DALI)</b>       | Compatible with EN/ IEC<br>60598-2-22: Suitable for<br>emergency installations as<br>central supply, non-maintained<br>(Z0) |

OUL-80912

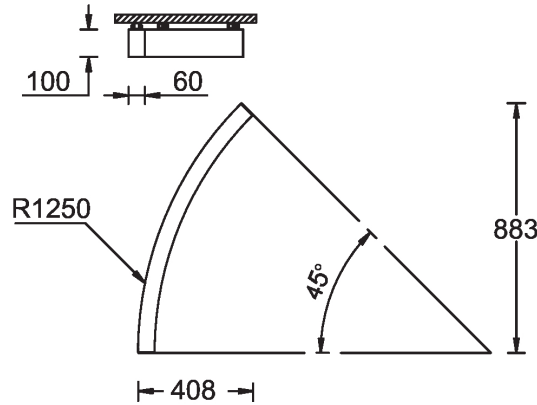

**OULU 7** (OUL-80912)**Accessory**

Continuous-coupler bracket  
**A81781**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**