

SANDY 8 (SA-31542-1MS)



Product description

Large - With integrated motion sensor



microPrim™



Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser


- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Optic




G

Product colour

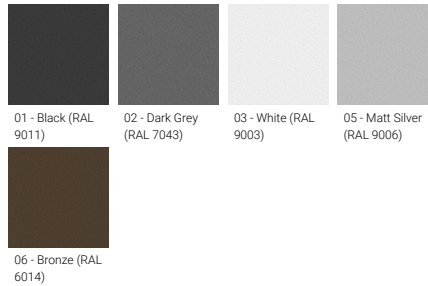

Special finishes upon request

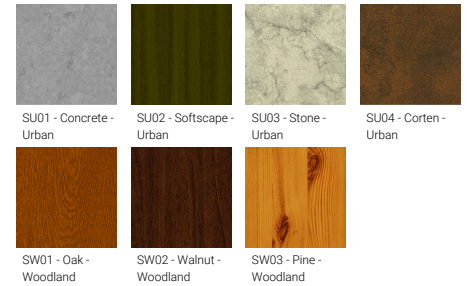

SANDY 8 (SA-31542-1MS)



Technical information

Material	Aluminium
Light source	96 LED
Power	27 W
Lumen	2354 - 2477 lm
Efficacy	87 - 92 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	115°x114°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B0-U4-G3
ULR	50
ULOR	50
CIE flux code n°3	69
Dimming type	On/Off, 1-10V

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.8 kg
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 37,000
Lifetime L80B10 (hours)	> 78,000
Lifetime L80B50 (hours)	> 86,000

SA-31542-1MS



- SANDY**
- Motion sensor - Microwave - 1-10V**
 - Ajustable sensor (10 seconds - 15 minutes)
 - 130° Sensitivity
 - Sensor detection area:
 - SA-31-071-1MS, SA-31-021-1MS, SA-31-032-1MS (D: 7 - 4.8 m)
 - SA-31-081-1MS, SA-31-042-1MS (D: 7 - 7.0 m)
 - SA-31-091-1MS, SA-31-052-1MS, SA-31-062-1MS (D: 6.5 m)
 - Motion sensor - Microwave - On/Off**
 - Ajustable sensor (5 seconds - 30 minutes)
 - 130° Sensitivity
 - Sensor detection area:
 - SA-31-071-1MS, SA-31-021-1MS, SA-31-032-1MS (D: 7 - 4.8 m)
 - SA-31-081-1MS, SA-31-042-1MS (D: 7 - 7.0 m)
 - SA-31-091-1MS, SA-31-052-1MS, SA-31-062-1MS (D: 6.5 m)

SANDY 8 (SA-31542-1MS)**Accessory**



Surface mounting box for easy
cabling (SANDY 8)
SCE-SANDY-8



DALI Control System
Control-DALI



Remote controller for the motion
sensor - 1-10V (A34191)
A34391
