

ARDEN 3 (ARD-80212)



Product description

Down - 375 mm



microPrim™


Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)

- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Down light distribution only

- Wireless control available through Bluetooth connection
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)


Optic



Product colour



Special finishes upon request

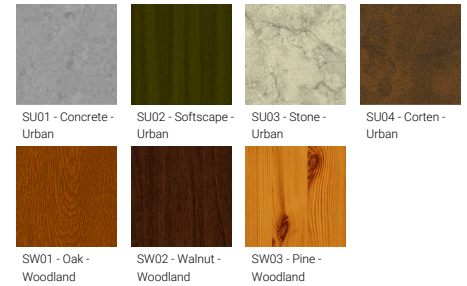

ARDEN 3 (ARD-80212)


Technical information


Material	Aluminium
Light source	288 LED
Power	38 W
Lumen	4036 - 4500 lm
Efficacy	106 - 118 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	O, P

Optic value	108°, 93°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G1
ULR	<1%
ULOR	<1%
CIE flux code n°3	96, 97
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.8 kg


Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 23,000
Lifetime L80B10 (hours)	> 45,000
Lifetime L80B50 (hours)	> 50,000
Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (ZO)

ARD-80212

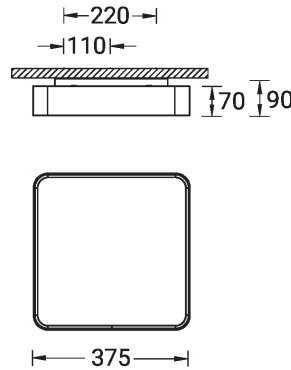


ARDEN 3 (ARD-80212)**Accessory**

Decorative pattern - Type A for
ARDEN 400 mm
A91521



Decorative pattern - Type B for
ARDEN 400 mm
A92921



Decorative pattern - Type C for
ARDEN for ARDEN 400 mm
A94321



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI