

**GINO 5 (GI-10002)**



**Product description**

102x203 mm - 1000 mm



microPrim™


**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear

**Product colour**



**Special finishes upon request**

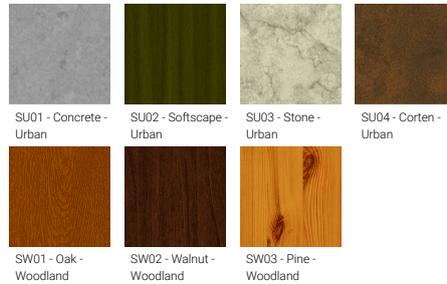

**GINO 5 (GI-10002)**

**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	1 COB
<b>Power</b>	4 W
<b>Lumen</b>	210 lm
<b>Efficacy</b>	53 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)

<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	G
<b>Optic value</b>	91°
<b>CCT / CRI</b>	2700K CRI80
<b>Bug</b>	B0-U0-G0
<b>ULR</b>	<1%
<b>ULOR</b>	<1%

<b>CIE flux code n°3</b>	97
<b>Dimming type</b>	On/Off
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	5.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Variants (On/Off)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

**Accessory**

---



---

Anchor bolt  
**A10791**

---