

LIGHTTALK 10 (LA-40013)



Product description

Without recessing box - Integral control gear - 655 mm
 - Class I - RGBW




microPrim™


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and sheet aluminium front frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel frame on request
- Two cable entries for through wiring
- Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Recessing box is not included
- 24 VDC input, DMX/RDM address with stable signal


Optic

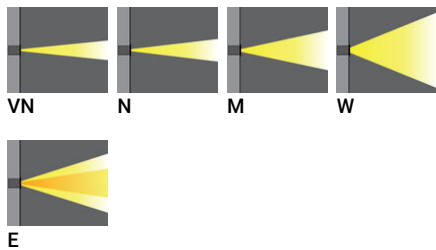

Product colour

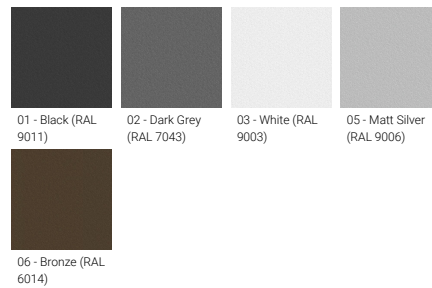

Special finishes upon request

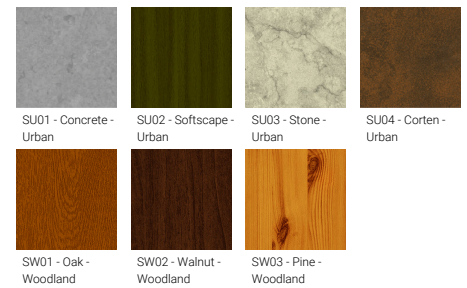

LIGHTALK 10 (LA-40013)


Technical information

Material	Aluminium
Light source	20 LED
Power	33 W
Lumen	1592 - 1916 lm
Efficacy	48 - 58 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	VN, N, M, W, E

Optic value	10°, 13°, 24°, 43°, 16° x35°
CCT / CRI	RGBW30, RGBW40
Bug	B2-U1-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	DMX, DMX/RDM
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.3 kg

Operating temperature	-20 °C to 40 °C
Cable	Four IP67 connectors supplied with 2x0.2 m of 3x1.0 sqmm outdoor cable and 2x0.2 m of 2x0.5 sqmm outdoor shielded cable
Through wiring	Two cable entries for through wiring
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	7 SDCM
Lifetime L90B10 (hours)	> 50,000
Lifetime L80B10 (hours)	> 68,000
Lifetime L80B50 (hours)	> 100,000
Variants (DMX/RDM)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LA-40013

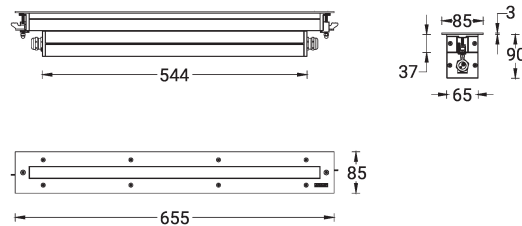

LIGHTALK 10 (LA-40013)

Accessory



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Recessing box
A41151
