

**GINI 2 (GN-30051)**



**Product description**

Down (Optic) & Up (Optic 2nd)



microPrim™



**Luminaire Structure**

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Frosted toughened glass


- Integral control gear

**Optic**




G

**Product colour**

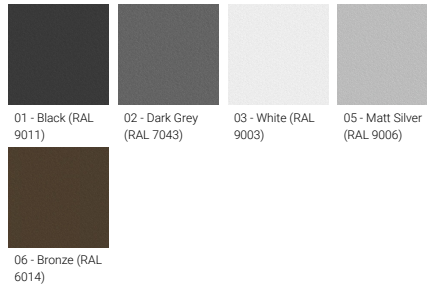

**Special finishes upon request**

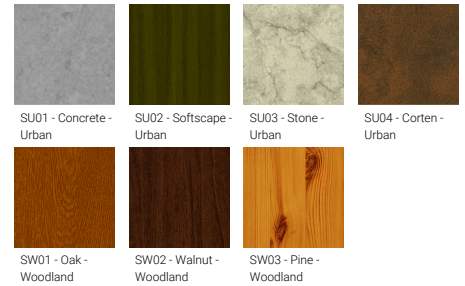

**GINI 2 (GN-30051)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	80 & 80 LED
<b>Power</b>	50 W
<b>Lumen</b>	3811 - 3970 lm
<b>Efficacy</b>	76 - 79 lm/W
<b>Driver option</b>	Integral control gear
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	220-240 V 50/60 Hz
<b>Optic</b>	G

<b>Optic value</b>	95°x 86°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U5-G0
<b>ULR</b>	51%
<b>ULOR</b>	51%
<b>Dimming type</b>	On/Off, DALI
<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	7.0 kg
<b>Operating temperature</b>	-20 °C to 40 °C

<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Frosted toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 23,000
<b>Lifetime L80B10 (hours)</b>	> 45,000
<b>Lifetime L80B50 (hours)</b>	> 49,000
<b>Variants (On/Off, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GN-30051

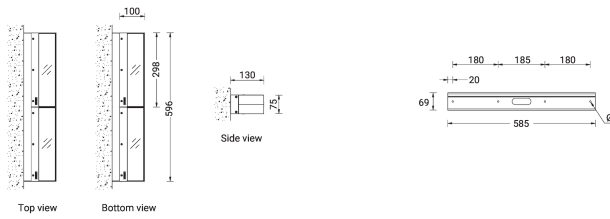

**Accessory**

---



DALI Control System  
**Control-DALI**

---