

LIGHTTALK 3 (LA-95001)



Product description

Integral control gear - 610 mm - Class I




microPrim™


Luminaire Structure

- Die-cast aluminium end-caps
- Extruded aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry, through wiring upon request
- One IP67 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- Integral control gear
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Stainless steel suspension kit in grade 304
- Suspension height is fully adjustable


Optic

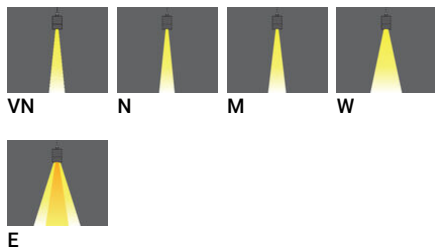

Product colour

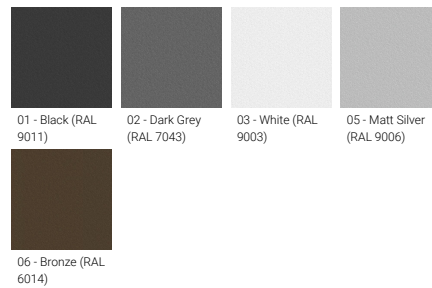

Special finishes upon request

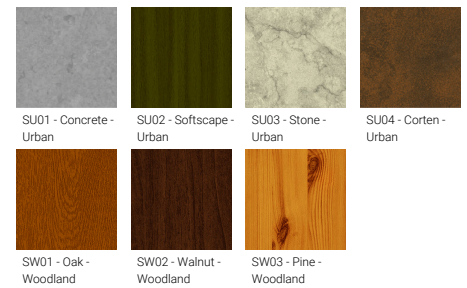

LIGHTALK 3 (LA-95001)


Technical information

Material	Aluminium
Light source	18 LED
Power	28 W
Lumen	1943 - 2847 lm
Efficacy	69 - 102 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	VN, N, M, W, E

Optic value	12°, 14°, 24°, 44°, 18° x 35°
CCT / CRI	3000K CRI80, 4000K CRI80
ULR	<1%
ULOR	<1%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	3.6 kg
Operating temperature	-20 °C to 40 °C

EPA (m2)	0.062
Cable	One IP67 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry, through wiring upon request
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

LA-95001



LIGHTALK 3 (LA-95001)

Accessory



DALI Control System
Control-DALI
