


NYBRO 13 (NYB-80781-PE)



Product description

Down (Optic) & Up (Optic 2nd) - L90° - 40x95 mm - 336 mm

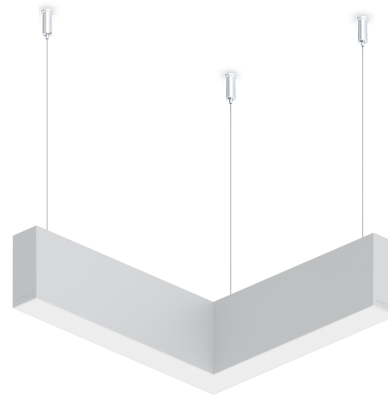


microPrim™

Luminaire Structure

- Die-cast aluminium end-caps and extruded aluminium profile with powder coating
- Passive thermal management
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
- Integral control gear
- Cut the connection angle according to the shape complete with electrical wires in white for mounting
- Up and down light distribution options
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options

Optic



Product colour



Special finishes upon request




NYBRO 13 (NYB-80781-PE)

Technical information

Material	Aluminium	Optic	O, P	Operating temperature	-20 °C to 40 °C
Light source	72 & 60 LED	Optic value	Opal, Micro-prismatic	MacAdam Ellipse	3 SDCM
Power	20 W	Optic (2nd)	O	Lifetime L90B10 (hours)	> 23,000
Lumen	1493 - 1650 lm	Optic (2nd) value	Opal	Lifetime L80B10 (hours)	> 45,000
Efficacy	75 - 83 lm/W	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L80B50 (hours)	> 50,000
Driver option	Integral control gear	Dimming type	On/Off, DALI	Variants (On/Off, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Input voltage	220-240 V 50/60 Hz	Weight	2.6 kg		

NYB-80781-PE

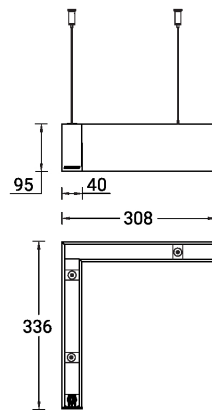

NYBRO 13 (NYB-80781-PE)**Accessory**



Continuous-coupler bracket
(40/50 mm Down profile)
A81881



Supply cable surface mounting
box
A80981



DALI Control System
Control-DALI
