

WELLINGTON 1 (WEL-20023)



Product description


Tunable White




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear toughened glass
- Integral control gear
- Driver is to be installed within the pole-head. Please contact the factory for pole compatibility.


Optic

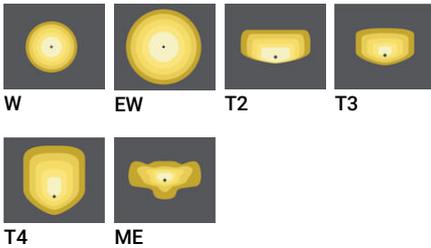

Product colour

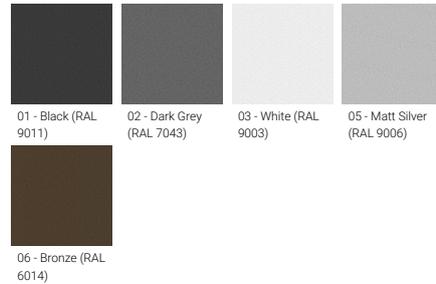

Special finishes upon request

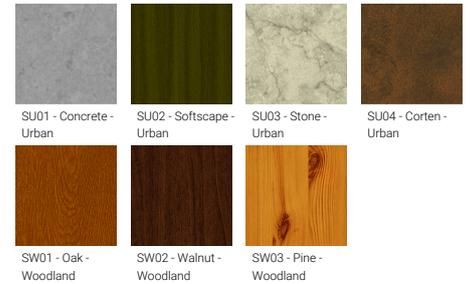


WELLINGTON 1 (WEL-20023)

Technical information

Material	Aluminium
Light source	64 LED
Power	157 W
Lumen	14380 - 15663 lm
Efficacy	92 - 100 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240V 50/60Hz
Optic	W, EW, T2, T3, T4, ME
Optic value	51°x64°, 111°x106°, 116°x37°, 142°x67°, 129°x56°, 142°x43°
CCT / CRI	TW (2700K - 6500K)
Bug	B2-U2-G2, B3-U2-G2, B3-U2-G3, B4-U2-G1
ULR	<1%
ULOR	<1%

CIE flux code n°3	97, 98, 99
Dimming type	DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	14.0 kg
Operating temperature	-20 °C to 50 °C
EPA (m2)	0.070
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

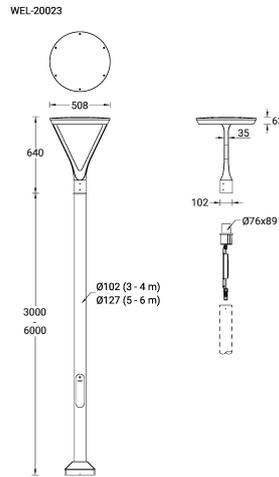

WELLINGTON 1 (WEL-20023)**Accessory**

Root mount kit
A20491



Root mount kit
A20691



Circuit breaker box IP44
A21291



3 m - Cylindrical, straight
aluminium pole DIA. 102 mm
APD130102-ASP



4 m - Cylindrical, straight
aluminium pole DIA. 102 mm
APD140102-ASP



5 m - Cylindrical, straight
aluminium pole DIA. 127 mm
APD150127-ASP



6 m - Cylindrical, straight
aluminium pole DIA. 127 mm
APD160127-ASP



DALI Control System
Control-DALI